INTRODUCTION: TOWN HOUSES/DUPLEXES

DEFINITIONS

Town Houses are single family, attached residences that may also be referred to as Duplexes, and may include Four-plexes.

Each Town House living unit is one of a group of two or more units that are joined by common walls. Town Houses will never have other units above or below. Town Houses always have individual exterior entries. Town Houses do not have more than two walls that are common with adjacent units.

FIVE DIFFERENT CLASSES

Town Houses/Duplexes are categorized into five Classes (quality levels) CD through A. These quality levels are roughly equivalent to the quality levels of the same names in the single-family detached residential schedules. The Unit-in-Place section can be used to make adjustments and additions to the Town House/Duplex schedules, although the Town House/Duplex schedules were not built up from the Unit-in-Place section.

PHOTOGRAPHS

Photographs are intended to illustrate the general characteristics of this type of housing in a given class (i.e., roof overhang, roof pitch, type, and quality of materials used, etc.), and are not an indication of typical size or setting.

COSTS

The square foot costs include a normal allowance for plans, specifications, and general contractors' overhead and profit.

The square foots costs do not include appliances, drapes, garages, carports, and other optional items. These items can be priced separately from the individual cost pages under adjustments and additions.

STEP BY STEP

There are five steps involved in arriving at a final Square Foot Cost:

Step 1) Determine class of Town House/Duplex.

Step 2) Select either "Inside Unit" or "Outside Unit" Square Foot Costs.

Step 3) Make adjustments and additions as necessary.

Step 4) Apply County Multiplier.

Step 5) Apply the proper depreciation multiplier. Since Town Houses and Duplexes are frequently rented investment properties, the assessor must consider whether the residential or the commercial depreciation tables are the most applicable to the particular building being priced from this section.

PRICING EXAMPLE

A pricing example is included at the end of this section.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD

TOWN HOUSES AND DUPLEXES





GENERAL DESCRIPTION

Class CD Town Houses and Duplexes are constructed with minimum compliance to uniform building codes. The building shape is usually rectangular, with little or no attention given to ornamentation or architectural design. The overall quality of materials and workmanship is below average, and the interior is plain, with few refinements.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Wood frame with siding. Moderate fenestration using inexpensive sash.

ROOF STRUCTURE: Wood structure with lightweight composition shingles or built-up with small rocks.

INTERIOR PARTITIONS AND FINISH: Wood framed, with taped and painted drywall. Doors are stock, hollow-core or flat panel, with low-grade hardware. Small bedroom closets with inexpensive wardrobe or hinged doors.

INSULATION: Wall and ceiling insulation based upon an extreme climate is included in the base cost.

FLOOR FINISH: Inexpensive carpet and pad, or vinyl composition tile.

CEILING: Drywall with one coat of paint, some enamel paint in kitchen and bath.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOOR: Concrete slab, floor drains.

FLOOR CONSTRUCTION: Wood joists and bridging beams and posts. Wood subfloor also on upper story floors.

HEATING AND AIR CONDITIONING: Forced air heating system with minimum output and ductwork.

ELECTRICAL: Minimum number of outlets and low cost fixtures.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Inexpensive paint grade or vinyl veneer kitchen cabinets. Counter tops are laminated plastic or plain tile, with a low splash.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TOWN HOUSES AND DUPLEXES

CLASS CD

SQUARE FOOT COSTS

The following Square Foot Cost tables are representative of the occupancies described on the adjacent page. **PLEASE NOTE:** Costs include an unfinished concrete block basement. The columns entitled "Wood Basement", "Crawl Space", and "Slab on Grade" are for adjusting your occupancy if it differs from the base. For other adjustments, see following pages.

INSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	138.17	166.08	215.60	176.67	178.35	-6.75	-32.25	-34.90	**400**
500	132.65	159.56	207.33	169.78	171.46	-6.15	-30.05	-32.70	**500**
600	127.82	153.73	199.75	163.57	165.25	-5.55	-27.85	-30.50	**600**
700	123.13	148.29	192.56	157.51	159.44	-4.95	-25.65	-28.30	**700**
800	119.20	143.11	186.63	152.20	153.88	-4.35	-23.45	-26.10	**800**
900	115.79	139.70	181.72	147.79	150.09	-4.00	-22.12	-24.77	**900**
1000	112.99	136.40	176.92	143.99	146.42	-3.65	-20.78	-23.43	**1000**
1200	108.47	131.38	170.90	138.47	140.65	-3.30	-19.45	-22.10	**1200**
1400	106.33	128.13	167.91	136.12	137.40	-3.12	-19.31	-21.96	**1400**
1600	103.82	124.98	165.04	133.39	134.25	-2.94	-19.16	-21.81	**1600**
1800	101.89	122.39	162.25	131.25	131.36	-2.76	-19.02	-21.67	**1800**
2000	100.02	119.84	159.52	129.16	128.51	-2.59	-18.88	-21.53	**2000**
2200	98.69	117.33	156.83	127.62	125.70	-2.41	-18.74	-21.39	**2200**
2400	97.39	114.86	154.18	126.10	122.93	-2.23	-18.59	-21.24	**2400**
2600	96.61	112.40	151.54	125.11	120.17	-2.05	-18.45	-21.10	**2600**

OUTSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	147.92	177.08	230.35	186.42	190.85	-7.25	-35.00	-37.65	**400**
500	141.91	169.95	219.84	179.04	182.97	-6.59	-32.56	-35.21	**500**
600	136.60	163.51	212.03	172.35	175.78	-5.93	-30.13	-32.78	**600**
700	131.67	157.83	204.60	166.05	169.73	-5.26	-27.69	-30.34	**700**
800	126.50	152.41	198.43	159.50	163.93	-4.60	-25.25	-27.90	**800**
900	123.50	148.54	192.43	155.50	159.68	-4.23	-23.83	-26.48	**900**
1000	120.13	144.79	188.56	151.13	155.56	-3.87	-22.42	-25.07	**1000**
1200	115.52	138.93	181.45	145.52	149.70	-3.50	-21.00	-23.65	**1200**
1400	112.88	135.68	178.24	142.66	146.07	-3.36	-20.85	-23.50	**1400**
1600	110.36	132.52	175.14	139.93	142.54	-3.23	-20.70	-23.35	**1600**
1800	108.42	129.77	172.14	137.78	139.41	-3.09	-20.55	-23.20	**1800**
2000	106.54	127.06	169.18	135.68	136.33	-2.96	-20.40	-23.05	**2000**
2200	104.70	124.40	166.27	133.63	133.29	-2.82	-20.25	-22.90	**2200**
2400	103.40	121.76	163.40	132.11	130.28	-2.69	-20.10	-22.75	**2400**
2600	102.61	119.16	160.54	131.11	127.30	-2.55	-19.95	-22.60	**2600**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

EXTERIOR FINISH

For other than wood siding, make the following adjustments to the cost per square foot of ground area:

Masonry veneer	+6%
Common brick	+12%
Concrete block	+5%

ROOF STRUCTURE

For other than wood structure with lightweight composition shingle, make the following adjustment per square foot of ground area:

Wood shingle	$2.01
Wood shake	2.46
Composition roll deduct	-1.49

HEATING AND COOLING: Additions or deductions per square foot of ground area.

	Number of Stories				
	1	1 1/2	2	Bi	Tri
HEATING SYSTEMS					
Forced-warm-air, without return ducts, deduct	-1.00	-1.50	-2.00	-2.00	-1.50
Forced-hot-water/steam, add	3.79	5.68	7.58	7.58	5.68
Electric wall heaters, baseboard type, deduct	-0.58	-0.87	-1.16	-1.16	-0.87
Electric, ceiling radiant, deduct	-1.06	-1.58	-2.11	-2.11	-1.58
Electric wall heaters, deduct	-3.02	-4.54	-6.05	-6.05	-4.54
Radiant (in-floor), add	3.97	5.95	7.94	7.94	5.95
Space heaters, deduct	-3.05	-4.57	-6.10	-6.10	-4.57
Wall or floor furnace, no ducts, deduct	-2.76	-4.14	-5.52	-5.52	-4.14
HEATING AND COOLING COMBINED SYSTEMS					
Forced air, A/C using heating ducts, add	7.09	10.64	14.19	14.19	10.64
Heat pump with supplemental heat, add	4.56	6.85	9.13	9.13	6.85
Air conditioning only with separate ducts, add	8.54	12.81	17.08	17.08	12.81
No heating, deduct	-5.24	-7.85	-10.47	-10.47	-7.85

Wood-burning unit added on to furnace: Add $2,102.50 to the final cost of home. Includes material and labor to connect to existing forced-air system. Extra chimney or flue costs which may be required by local codes are not included.

PLUMBING

Average cost per fixture	$1,174
Extra bath, three fixtures	3,684
Two fixtures	2,478
Water softener, automatic	2,256
Manual	1,434
Extra toilet	1,219
Extra sink	743
Separate shower (fiberglass)	1,135
Bathroom vent fan	196

FIREPLACES

Stories	1	2
Inside chimney	$5,025	$6,300
Outside chimney	6,125	7,550
Prefabricated	2,375	2,900

For other fireplaces, see Unit-in-Place costs.

PORCHES

For exterior stairways, add per flight as follows:

	Unfinished Soffit	Plastered Soffit
Wood	$1,830	$2,100
Cement composition	2,825	3,100

For porches, refer to Class CD residential porch schedule, page 55, or see next page.

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room	$18.00
Finished living area	32.47
Walk-out, below grade, cost of door	1,610
Walk-out, above grade, cost of door	2,145

BUILT-INS

Appliance allowance, (if not itemized)	$1,878
Cooktop, countertop, four burners	606
Dishwasher, built-in	613
Garbage disposal	209
Heater, bathroom, without fan	189
With fan	267
Hot tub, with whirlpool, built-in	6,370
Hood, range, unvented	267
Vented	469
Intercom system, master station	665
Satellite	137
Whirlpool tub (Jacuzzi)	6,742
Whirlpool tub when it replaces regular bathtub	5,483
Oven, single, built-in	1,063
Microwave	300
Range, drop in, with standard oven	1,056
With self cleaning oven	1,408
Sauna with heater and controls	5,164
Trash compactor	782
Vacuum, central system	2,406

WATER AND WASTE DISPOSAL

City water and sewer connections	$2,575
Water well, 200 feet	10,073
Septic system, 1,500 gallons	6,813
2,000 gallons	8,704

The cost for each unit over one for water and sewer will vary by location.

OTHER ADJUSTMENTS

Please refer to Class CD Site-built residences, Adjustments and Additions, Pages 54 – 57 and Unit-in-Place sections.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES: Base costs include electric lighting.

On slab – 18" Foundation				On slab – 42" Foundation				
Size in Sq. Ft.	Siding	Block	Brick	Siding	Block	Brick	Finished Interior	Size in Sq. Ft.
240	43.55	47.53	54.12	49.62	55.81	60.90	8.93	**240**
308	39.64	42.71	47.92	45.05	50.40	53.72	8.48	**308**
352	37.75	40.36	44.92	42.77	47.73	50.27	8.28	**352**
400	35.99	38.21	42.18	40.68	45.31	47.14	8.02	**400**
440	34.95	37.23	41.08	39.45	43.88	45.84	7.95	**440**
480	34.03	36.32	40.10	38.34	42.58	44.73	7.82	**480**
528	33.06	35.40	39.05	37.23	41.27	43.49	7.69	**528**
600	31.82	34.16	37.69	35.73	39.51	41.92	7.56	**600**
800	29.34	31.75	35.27	32.80	36.06	39.12	7.17	**800**
1020	27.97	30.19	33.38	31.10	34.10	36.90	6.98	**1020**
Common wall deduction for attached garage								
1/2-wall	-958	-1,069	-1,324	-1,174	-1,376	-1,571	—	**1/2-wall**
1-wall	-1,917	-2,217	-2,647	-2,354	-2,751	-3,136	—	**1-wall**
1 1/2-wall	-2,875	-3,325	-3,971	-3,527	-4,127	-4,707	—	**1 1/2-wall**
2-wall	-3,827	-4,434	-5,294	-4,701	-5,496	-6,279	—	**2-wall**

No concrete floor, deduct. . . . . -$5.93

Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated garage doors, add per square foot of door:

Single. . . . . $4.04 Double. $3.00

Door opener, add for radio controlled. 463

For basement garage, add to residence:

1-car. . . . . $2,380 2-car. $3,325

1 1/2-car. 2,836 3-car. 4,401

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. (Base cost contains forced-warm-air heat only. For other types of heating/cooling use the 1-Story Heating and Cooling Adjustments for this square footage only).

For storage area above garage, add $11.67 per square foot (stairway, floorboards, electrical, 6-foot headroom).

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint, and concrete slab.

Aluminum, corrugated. $13.04

Composition shingles. 14.54

Built-up tar and gravel. 14.87

Wood shingles. 16.50

Fiberglass. 12.71

PORCHES AND DECKS

Sym.	CONCRETE FLOOR with 42" foundation				WOOD FLOOR with 42" foundation				Sym.
Size for Rates	PLATFORM PORCH CPP	COVERED PORCH CCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	PLATFORM PORCH WPP	COVERED PORCH WCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	Size for Rates
25	28.25	50.50	84.50	115.00	54.00	76.50	110.00	141.00	**25**
50	23.20	42.50	66.50	86.50	38.50	58.00	82.00	102.00	**50**
75	21.05	39.75	60.00	77.00	32.75	51.50	72.00	88.50	**75**
100	18.90	36.75	55.50	71.00	26.75	44.75	63.50	78.50	**100**
125	18.38	35.79	52.69	66.19	25.38	43.00	60.25	73.50	**125**
150	17.85	35.00	50.50	62.50	24.00	41.25	57.00	68.50	**150**
175	17.32	33.92	48.87	59.77	22.60	39.50	54.50	65.25	**175**
200	16.80	33.25	47.50	57.50	21.20	37.75	52.00	62.00	**200**
250	15.77	31.31	44.53	53.54	18.40	34.13	47.63	56.75	**250**
300	14.75	29.75	42.25	50.50	15.60	30.50	43.25	51.50	**300**
400	14.59	29.56	41.99	50.21	15.30	30.06	42.64	50.83	**400**
500	14.44	29.41	41.80	49.99	15.00	29.61	42.03	50.17	**500**
600	14.28	29.29	41.64	49.81	14.70	29.17	41.42	49.50	**600**
700	14.13	29.19	41.50	49.66	14.40	28.72	40.81	48.83	**700**

	ADD	DEDUCT		WOOD DECKS			
Size for Rates	BASEMENT UNDER	SHALLOW FOUNDATION		TREATED WOOD	PINE OR SIMILAR	REDWOOD OR CEDAR	Size for Rates
25	23.73	-16.10		43.42	34.69	46.88	**25**
50	23.15	-11.74		32.08	25.69	35.66	**50**
75	22.82	-9.78		26.56	21.20	32.16	**75**
100	22.56	-8.61		23.34	18.65	27.64	**100**
125	22.36	-7.76		22.29	17.77	27.20	**125**
150	22.17	-7.17		20.93	16.69	25.62	**150**
175	22.10	-6.65		19.85	15.83	24.37	**175**
200	21.97	-6.26		18.91	15.13	22.89	**200**
250	21.78	-5.67		17.55	13.99	21.69	**250**
300	21.65	-5.22		16.48	13.14	20.42	**300**
400	21.39	-4.56		14.93	11.91	18.58	**400**
450	21.32	-4.37		14.33	11.42	17.89	**450**
500	21.19	-4.11		13.82	11.02	17.28	**500**
600	21.06	-3.78		12.97	10.67	16.74	**600**
700	20.93	-3.52		12.31	9.81	15.48	**700**

For details of building materials included in Porches, see Glossary under symbol name. Example: For concrete platform porch, see Glossary under "CPP". For a more complete discussion of porches and decks, refer to Class CD Site-built, "Adjustments and Additions", Page 55.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS C

TOWN HOUSES AND DUPLEXES





GENERAL DESCRIPTION

Class C Town Houses and Duplexes are constructed to local building code and will exceed the minimum requirements of mortgage insuring agencies. Overall architectural design is simple, with attention given only to the front elevation to distinguish one unit from another. The overall quality of materials and workmanship is average.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Wood frame with siding. Adequate fenestration using standard-grade sash.

ROOF STRUCTURE: Wood structure with lightweight composition shingles or built-up with small rocks.

INTERIOR PARTITIONS AND FINISH: Wood framed, with taped and painted drywall. Doors are stock, hollow-core or flat panel, with standard grade hardware. Adequate wardrobe-type bedroom, guest, and shelved linen closets.

INSULATION: Wall and ceiling insulation based upon an extreme climate is included in the base.

FLOOR FINISH: Carpet and pad or vinyl composition tile.

CEILING: Drywall with one coat of paint, some enamel paint in kitchen and bath.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOOR: Concrete slab, floor drains.

FLOOR CONSTRUCTION: Wood joists and bridging beams and posts. Wood subfloor also on upper-story floors.

HEATING AND AIR CONDITIONING: Forced air heating system with adequate output and ductwork.

ELECTRICAL: Adequate number of outlets and standard grade fixtures.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Hardwood veneer or paint grade wood kitchen cabinets. Counter tops are laminated plastic or ceramic tile with splash.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TOWN HOUSES AND DUPLEXES

CLASS C

SQUARE FOOT COSTS

The following Square Foot Cost tables are representative of the occupancies described on the adjacent page. **PLEASE NOTE:** Costs include an unfinished concrete block basement. The columns entitled "Wood Basement", "Crawl Space", and "Slab on Grade" are for adjusting your occupancy if it differs from the base. For other adjustments, see following pages.

INSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	155.86	188.05	247.20	201.11	201.73	-7.50	-36.00	-39.23	**400**
500	150.04	181.78	238.05	193.73	195.08	-6.85	-33.63	-36.86	**500**
600	145.15	177.74	233.49	187.28	191.24	-6.20	-31.25	-34.48	**600**
700	140.79	170.86	222.13	181.35	183.42	-5.55	-28.88	-32.11	**700**
800	136.43	165.62	215.77	175.43	177.80	-4.90	-26.50	-29.73	**800**
900	133.27	161.59	210.61	171.22	173.77	-4.35	-25.11	-28.34	**900**
1000	130.26	157.71	205.60	167.16	169.89	-3.80	-23.72	-26.95	**1000**
1200	125.95	152.39	199.29	161.80	163.82	-3.25	-22.33	-25.56	**1200**
1400	121.90	147.73	192.24	156.70	158.79	-2.70	-20.94	-24.17	**1400**
1600	118.01	143.21	188.19	151.76	153.89	-2.15	-19.55	-22.78	**1600**
1800	115.94	140.32	185.45	149.34	150.62	-2.20	-19.36	-22.59	**1800**
2000	113.94	137.50	182.78	146.99	147.43	-2.25	-19.17	-22.40	**2000**
2200	112.00	134.73	180.17	144.70	144.28	-2.30	-18.98	-22.21	**2200**
2400	110.60	132.00	177.61	142.95	141.18	-2.35	-18.79	-22.02	**2400**
2600	109.23	129.31	175.07	141.23	138.11	-2.40	-18.60	-21.83	**2600**

OUTSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	166.36	200.05	263.20	211.61	215.23	-8.00	-39.00	-42.23	**400**
500	160.19	193.59	253.86	203.88	208.02	-7.35	-36.44	-39.67	**500**
600	154.95	189.36	248.11	197.07	203.61	-6.70	-33.88	-37.11	**600**
700	150.23	181.92	236.57	190.79	195.23	-6.05	-31.31	-34.54	**700**
800	145.68	176.12	230.02	184.68	189.05	-5.40	-28.75	-31.98	**800**
900	141.89	171.96	223.73	179.84	184.51	-4.99	-27.23	-30.46	**900**
1000	138.75	167.95	218.59	175.65	180.13	-4.58	-25.71	-28.94	**1000**
1200	133.81	161.75	211.15	169.66	173.93	-4.17	-24.19	-27.42	**1200**
1400	129.63	156.96	204.97	164.43	168.77	-3.76	-22.67	-25.90	**1400**
1600	125.61	152.31	200.45	159.36	163.74	-3.35	-21.15	-24.38	**1600**
1800	123.52	149.18	197.36	156.92	160.16	-3.20	-20.94	-24.17	**1800**
2000	121.00	146.11	194.34	154.05	156.64	-3.05	-20.73	-23.96	**2000**
2200	119.04	143.09	191.38	151.74	153.17	-2.90	-20.52	-23.75	**2200**
2400	117.62	140.12	188.46	149.97	149.75	-2.75	-20.31	-23.54	**2400**
2600	115.73	137.18	185.57	147.73	146.36	-2.60	-20.10	-23.33	**2600**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

EXTERIOR FINISH

For other than wood siding, make the following adjustments to the cost per square foot of ground area:

Masonry veneer	+6%
Common brick	+12%
Concrete block	+5%

ROOF STRUCTURE

For other than wood structure with lightweight composition shingle, make the following adjustment per square foot of ground area:

Wood shingle	$2.09
Wood shake	2.57
Composition roll deduct	-1.72

HEATING AND COOLING: Additions or deductions per square foot of ground area.

	Number of Stories				
	1	1 1/2	2	Bi	Tri
HEATING SYSTEMS					
Forced-warm-air, without return ducts, deduct	-1.01	-1.51	-2.01	-2.01	-1.51
Forced-hot-water/steam, add	4.15	6.22	8.29	8.29	6.22
Electric wall heaters, baseboard type, deduct	-0.67	-1.01	-1.34	-1.34	-1.01
Electric, ceiling radiant, deduct	-1.26	-1.88	-2.51	-2.51	-1.88
Electric wall heaters, deduct	-3.40	-5.10	-6.80	-6.80	-5.10
Radiant (in-floor), add	4.47	6.71	8.94	8.94	6.71
HEATING AND COOLING COMBINED SYSTEMS					
Forced air, A/C using heating ducts, add	7.69	11.53	15.37	15.37	11.53
Heat pump with supplemental heat, add	5.12	7.68	10.24	10.24	7.68
Air conditioning only with separate ducts, add	9.34	14.01	18.68	18.68	14.01
No heating, deduct	-5.78	-8.67	-11.55	-11.55	-8.67

Wood-burning unit added on to furnace: Add $2,755 to the final cost of home. Includes material and labor to connect to existing forced-air system. Extra chimney or flue costs which may be required by local codes are not included.

PLUMBING

Average cost per fixture	$1,408
Extra bath, three fixtures	4434
Two fixtures	2967
Water softener, automatic	2302
Manual	1500
Extra toilet	1454
Extra sink	906
Separate shower (fiberglass)	1298
Bathroom vent fan	241

FIREPLACES

Stories	1	2
Inside chimney	$5,725	$7,125
Outside chimney	6,975	8,575
Prefabricated	2,825	3,465

For other fireplaces, see Unit-in-Place costs.

PORCHES

For exterior stairways, add per flight as follows:

	Unfinished Soffit	Plastered Soffit
Wood	$2,030	$2,300
Cement composition	3,250	3,550

For porches, refer to Class C residential porch schedule, page 71, or see next page.

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room	$18.78
Finished living area	34.82
Walk-out, below grade, cost of door	1,813
Walk-out, above grade, cost of door	2,517

BUILT-INS

Appliance allowance, (if not itemized)	$2,686
Cooktop, countertop, four burners	756
Dishwasher, built-in	756
Garbage disposal	254
Heater, bathroom, without fan	209
With fan	306
Hot tub, with whirlpool, built-in	7,179
Hood, range, unvented	319
Vented	554
Intercom system, master station	756
Satellite	156
Whirlpool tub (Jacuzzi)	8,033
Whirlpool tub when it replaces regular bathtub	6,435
Oven, single, built-in	1,304
Microwave	411
Range, drop in, with standard oven	1,232
With self cleaning oven	1,676
Sauna with heater and controls	6,448
Trash compactor	861
Vacuum, central system	2,536

WATER AND WASTE DISPOSAL

City water and sewer connections	$2,901
Water well, 200 feet	10,432
Septic system, 1,500 gallons	7,205
2,000 gallons	9,226

The cost for each unit over one for water and sewer will vary by location.

OTHER ADJUSTMENTS

Please refer to Class C Site-built residences, Adjustments and Additions, Pages 70-73 and Unit-in-Place sections.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES: Base costs include electric lighting.

Size in Sq. Ft.	On slab – 18" Foundation: Siding	Block	Brick	On slab – 42" Foundation: Siding	Block	Brick	Finished Interior	Size in Sq. Ft.
240	48.77	50.73	61.09	55.09	59.07	68.20	9.91	**240**
308	44.53	46.23	55.42	50.14	53.59	61.68	9.32	**308**
352	42.45	44.01	52.62	47.66	50.86	58.48	9.06	**352**
400	40.49	41.99	50.01	45.44	48.38	55.55	8.80	**400**
440	39.32	40.75	48.44	44.08	46.88	53.72	8.67	**440**
480	38.34	39.64	47.01	42.84	45.51	52.09	8.48	**480**
528	37.23	38.53	45.51	41.53	44.08	50.40	8.35	**528**
600	35.79	36.97	43.62	39.84	42.25	48.18	8.08	**600**
800	32.93	33.97	39.64	36.45	38.47	43.68	7.76	**800**
1020	31.23	32.21	37.42	34.49	36.32	41.08	7.50	**1020**
Common wall deduction for attached garage								
1/2-wall	1,037	1,343	1,447	1,258	1,650	1,689	—	**1/2-wall**
1-wall	2,080	2,764	2,888	2,517	3,299	3,384	—	**1-wall**
1 1/2-wall	3,117	4,147	4,336	3,775	4,949	5,073	—	**1 1/2-wall**
2-wall	4,160	5,535	5,777	5,033	6,592	6,761	—	**2-wall**

No concrete floor, deduct. . . . . -$6.45

Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated garage doors, add per square foot of door:

Single. . . . . $4.82 Double. $3.59

Door opener, add for radio controlled. 522

For basement garage, add to residence:

1-car. . . . . $2,478 2-car. $3,456

1 1/2-car. 2,967 3-car. 4,662

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. (Base cost contains forced-warm-air heat only. For other types of heating/cooling use the 1-Story Heating and Cooling Adjustments for this square footage only).

For storage area above garage, add $13.11 per square foot (stairway, floorboards, electrical, 6-foot headroom).

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint and concrete slab.

Aluminum, corrugated. $14.15

Composition shingles. 15.91

Built-up tar and gravel. 16.43

Wood shingles. 18.06

Fiberglass. 13.76

PORCHES AND DECKS

Sym.	CONCRETE FLOOR with 42" foundation				WOOD FLOOR with 42" foundation				Sym.
Size for Rates	**PLATFORM PORCH CPP**	**COVERED PORCH CCP**	**SCREEN-ENCLOSED PORCH CSEP**	**GLASS-ENCLOSED PORCH CGEP**	**PLATFORM PORCH WPP**	**COVERED PORCH WCP**	**SCREEN-ENCLOSED PORCH CSEP**	**GLASS-ENCLOSED PORCH CGEP**	**Size for Rates**
25	30.00	54.00	94.50	130.00	57.50	81.50	122.00	157.00	**25**
50	25.00	46.25	74.50	97.50	43.25	64.50	92.50	116.00	**50**
75	23.00	43.50	67.50	87.00	36.50	57.00	81.00	100.00	**75**
100	21.00	40.75	62.50	80.00	30.00	49.75	71.50	89.00	**100**
125	20.43	39.65	59.41	74.62	28.50	47.75	67.75	83.25	**125**
150	19.85	38.75	57.00	70.50	27.00	45.75	64.00	77.50	**150**
175	19.30	37.62	54.82	67.50	25.43	43.88	61.00	73.75	**175**
200	18.75	37.00	53.00	65.00	23.85	42.00	58.00	70.00	**200**
250	17.63	34.92	49.90	60.47	20.78	38.13	53.38	64.25	**250**
300	16.50	33.25	47.50	57.00	17.70	34.25	48.75	58.50	**300**
400	16.34	33.03	47.18	56.68	17.40	33.81	48.14	57.83	**400**
450	16.27	32.93	47.05	56.55	17.25	33.58	47.83	57.50	**450**
500	16.19	32.85	46.93	56.44	17.10	33.36	47.53	57.17	**500**
600	16.03	32.71	46.73	56.24	16.80	32.92	46.92	56.50	**600**
700	15.88	32.60	46.56	56.07	16.50	32.47	46.31	55.83	**700**

Size for Rates	ADD: BASEMENT UNDER	DEDUCT: SHALLOW FOUNDATION	WOOD DECKS: TREATED WOOD	PINE OR SIMILAR	REDWOOD OR CEDAR	Size for Rates
25	25.82	-16.30	44.34	35.47	47.99	**25**
50	25.17	-11.87	32.86	26.28	36.58	**50**
75	24.78	-9.91	27.16	21.70	32.97	**75**
100	24.45	-8.67	23.93	19.10	28.36	**100**
125	24.25	-7.82	22.78	18.19	27.89	**125**
150	24.12	-7.24	21.40	17.08	26.28	**150**
175	23.93	-6.72	20.29	16.20	24.98	**175**
200	23.80	-6.32	19.36	15.52	23.54	**200**
250	23.60	-5.74	17.96	14.33	22.25	**250**
300	23.47	-5.28	16.86	13.46	20.96	**300**
400	23.21	-4.63	15.27	12.18	19.08	**400**
450	23.08	-4.37	14.67	11.70	18.36	**450**
500	23.02	-4.17	14.15	11.28	17.73	**500**
600	22.82	-3.85	13.29	10.59	16.70	**600**
700	22.69	-3.59	12.61	10.04	15.88	**700**

For details of building materials included in Porches, see Glossary under symbol name. Example: For concrete platform porch, see Glossary under "CPP". For a more complete discussion of porches and decks, refer to Class C Site-built, "Adjustments and Additions", Page 71.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS BC

TOWN HOUSES AND DUPLEXES





GENERAL DESCRIPTION

Class BC Town Houses and Duplexes are above average in quality of both materials and workmanship. Considerable attention is given to the front elevation to distinguish one unit from another. The floor plan is usually from stock plans but includes some custom interior features.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Wood frame with siding. Well-designed fenestration, using a good grade sash.

ROOF STRUCTURE: Wood structure with wood shingles.

INTERIOR PARTITIONS AND FINISH: Wood framed, with well finished drywall. Some walls can be wallpapered. Doors are good quality, hollow-core or panel. Common partition wall with adjacent units will have some soundproofing. Bedroom closets are walk-in or full-size, wardrobe with sliding doors. Base and casing are well finished softwood.

INSULATION: Wall and ceiling insulation based on an extreme climate is included in base costs.

FLOOR FINISH: Carpet, hardwood, and vinyl tile or linoleum.

CEILING: Well finished drywall. Some ceilings are sprayed. Enamel paint in kitchen and bath.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOOR: Concrete slab, floor drains.

FLOOR CONSTRUCTION: Wood joists and bridging beams and posts. Wood subfloor also on upper-story floors.

HEATING AND AIR CONDITIONING: Forced air heating system with adequate output and ductwork.

ELECTRICAL: Adequate number of convenience outlets and some luminous fixtures in kitchen and bath.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Hardwood or hardwood veneer kitchen cabinets. Counter tops are ceramic tile or laminated plastic.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TOWN HOUSES AND DUPLEXES

CLASS BC

SQUARE FOOT COSTS

The following Square Foot Cost tables are representative of the occupancies described on the adjacent page. **PLEASE NOTE:** Costs include an unfinished concrete block basement. The columns entitled "Wood Basement", "Crawl Space", and "Slab on Grade" are for adjusting your occupancy if it differs from the base. For other adjustments, see following pages.

INSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	197.45	249.34	324.67	260.45	260.96	-9.00	-45.00	-49.35	**400**
500	191.63	242.02	315.73	252.63	256.65	-8.31	-42.25	-46.60	**500**
600	187.21	238.71	314.46	246.21	257.46	-7.63	-39.50	-43.85	**600**
700	183.59	232.47	305.72	240.59	251.22	-6.94	-36.75	-41.10	**700**
800	180.47	224.11	291.19	235.47	241.74	-6.25	-34.00	-38.35	**800**
900	176.71	219.85	285.43	230.26	236.72	-5.84	-32.40	-36.75	**900**
1000	173.68	215.82	279.90	225.78	231.94	-5.43	-30.80	-35.15	**1000**
1200	168.68	209.07	270.90	219.33	225.20	-5.02	-29.20	-33.55	**1200**
1400	164.08	203.49	263.30	213.28	219.24	-4.61	-27.60	-31.95	**1400**
1600	160.24	198.13	256.96	207.99	213.50	-4.20	-26.00	-30.35	**1600**
1800	157.11	194.77	253.83	203.91	209.77	-3.91	-25.46	-29.81	**1800**
2000	154.61	191.51	250.83	200.46	206.14	-3.62	-24.92	-29.27	**2000**
2200	152.19	187.59	247.91	197.09	201.96	-3.33	-24.38	-28.73	**2200**
2400	149.83	183.73	245.05	193.78	197.86	-3.04	-23.84	-28.19	**2400**
2600	147.52	179.92	242.24	190.52	193.80	-2.75	-23.30	-27.65	**2600**

OUTSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	212.45	265.59	348.17	275.45	280.21	-9.75	-48.50	-52.85	**400**
500	206.13	258.15	337.10	267.13	274.65	-9.00	-45.63	-49.98	**500**
600	201.21	254.71	334.71	260.21	274.21	-8.25	-42.75	-47.10	**600**
700	197.09	247.97	325.84	254.09	267.09	-7.50	-39.88	-44.23	**700**
800	193.47	239.11	311.19	248.47	256.74	-6.75	-37.00	-41.35	**800**
900	189.51	234.27	304.23	243.06	251.52	-6.28	-35.20	-39.55	**900**
1000	185.78	229.67	298.50	237.88	246.54	-5.81	-33.40	-37.75	**1000**
1200	180.58	222.72	288.30	231.23	238.85	-5.34	-31.60	-35.95	**1200**
1400	174.78	216.95	280.50	223.98	232.70	-4.87	-29.80	-34.15	**1400**
1600	170.24	211.38	272.96	217.99	226.75	-4.40	-28.00	-32.35	**1600**
1800	167.60	207.26	269.62	214.40	222.63	-4.12	-27.45	-31.80	**1800**
2000	164.59	203.24	266.41	210.44	218.62	-3.84	-26.90	-31.25	**2000**
2200	162.16	199.31	263.28	207.06	213.94	-3.56	-26.35	-30.70	**2200**
2400	159.29	195.44	260.21	203.24	209.32	-3.28	-25.80	-30.15	**2400**
2600	156.97	191.62	257.19	199.97	204.75	-3.00	-25.25	-29.60	**2600**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

EXTERIOR FINISH

For other than wood siding, make the following adjustments to the cost per square foot of ground area:

Masonry veneer	+6%
Common brick	+11%
Face brick/stone	+17%
Concrete block	+4%

ROOF STRUCTURE

For other than wood structure with wood shingle, make the following adjustment per square foot of ground area:

Wood shake	$.40
Concrete or clay tile	8.62
Composition roll deduct	-4.62
Comp. shingle/built-up rock deduct	-2.31

HEATING AND COOLING: Additions or deductions per square foot of ground area.

	Number of Stories				
	1	1 1/2	2	Bi	Tri
HEATING SYSTEMS					
Forced-warm-air, without return ducts, deduct	-1.02	-1.53	-2.04	-2.04	-1.53
Forced-hot-water/steam, add	5.03	7.55	10.06	10.06	7.55
Electric wall heaters, baseboard type, deduct	-0.90	-1.35	-1.80	-1.80	-1.35
Electric, ceiling radiant, deduct	-1.76	-2.64	-3.52	-3.52	-2.64
Electric wall heaters, deduct	-4.34	-6.51	-8.67	-8.67	-6.51
Radiant (in-floor), add	5.74	8.62	11.49	11.49	8.62
HEATING AND COOLING COMBINED SYSTEMS					
Forced air, A/C using heating ducts, add	9.14	13.72	18.29	18.29	13.72
Heat pump with supplemental heat, add	6.53	9.80	13.06	13.06	9.80
Air conditioning only with separate ducts, add	11.30	16.95	22.60	22.60	16.95
No heating, deduct	-7.12	-10.68	-14.25	-14.25	-10.68

Wood-burning unit added on to furnace: Add $3,672 to the final cost of home. Includes material and labor to connect to existing forced-air system. Extra chimney or flue costs which may be required by local codes are not included.

PLUMBING

Average cost per fixture	$2,073
Extra bath, three fixtures	6,520
Two fixtures	4,369
Water softener, automatic	2,406
Manual	1,663
Extra toilet	2,093
Extra sink	1,343
Separate shower (fiberglass)	2,641
Bathroom vent fan	346

FIREPLACES

Stories	1	2
Inside chimney	$7,425	$9,100
Outside chimney	9,125	11,075
Prefabricated	4,000	4,960

For other fireplaces, see Unit-in-Place costs.

PORCHES

For exterior stairways, add per flight as follows:

	Unfinished Soffit	Plastered Soffit
Wood	$2,550	$2,900
Cement composition	4,175	4,500

For porches, refer to Class BC residential porch schedule, page 87, or see next page.

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room	$26.54
Finished living area	52.03
Walk-out, below grade, cost of door	2,315
Walk-out, above grade, cost of door	3,553

BUILT-INS

Appliance allowance, (if not itemized)	$3,860
Cooktop, countertop, four burners	1,180
Dishwasher, built-in	1,141
Garbage disposal	352
Heater, bathroom, without fan	274
With fan	391
Hot tub, with whirlpool, built-in	9,233
Hood, range, unvented	463
Vented	776
Intercom system, master station	985
Satellite	183
Whirlpool tub (Jacuzzi)	11,547
Whirlpool tub when it replaces regular bathtub	8,939
Oven, single, built-in	1,976
Microwave	789
Range, drop in, with standard oven	1,656
With self cleaning oven	2,367
Sauna with heater and controls	10,047
Trash compactor	1,043
Vacuum, central system	2,823

WATER AND WASTE DISPOSAL

City water and sewer connections	$3,716
Water well, 200 feet	11,377
Septic system, 1,500 gallons	8,150
2,000 gallons	10,562

The cost for each unit over one for water and sewer will vary by location.

OTHER ADJUSTMENTS

Please refer to Class BC Site-built residences, Adjustments and Additions, Pages 86-89 and Unit-in-Place sections.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES: Base costs include electric lighting.

Size in Sq. Ft.	On slab – 18" Foundation: Siding	Block	Brick	On slab – 42" Foundation: Siding	Block	Brick	Finished Interior	Size in Sq. Ft.
240	63.18	72.31	83.98	69.69	81.57	91.35	11.61	**240**
308	58.16	66.31	76.61	64.00	74.39	83.20	10.95	**308**
352	55.62	63.31	72.96	61.14	70.87	79.15	10.56	**352**
400	53.33	60.57	69.63	58.52	67.61	75.50	10.24	**400**
440	51.83	58.75	67.42	56.83	65.46	73.02	10.04	**440**
480	50.53	57.18	65.46	55.32	63.64	70.81	9.85	**480**
528	49.16	55.49	63.37	53.70	61.61	68.53	9.65	**528**
600	47.34	53.27	60.70	51.61	59.01	65.53	9.45	**600**
800	43.36	48.51	54.83	47.06	53.33	58.94	8.87	**800**
1020	41.21	45.84	51.57	44.57	50.27	55.35	8.54	**1020**
Common wall deduction for attached garage								
1/2-wall	1,239	1,500	1,897	1,460	1,806	2,145	—	**1/2-wall**
1-wall	2,484	3,084	3,801	2,921	3,612	4,290	—	**1-wall**
1 1/2-wall	3,723	4,623	5,698	4,381	5,418	6,435	—	**1 1/2-wall**
2-wall	4,962	6,161	7,596	5,835	7,224	8,580	—	**2-wall**

No concrete floor, deduct			-$7.82
Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated garage doors, add per square foot of door:			
Single	$6.85	Double	$5.09
Door opener, add for radio controlled			652
For basement garage, add to residence:			
1-car	$2,738	2-car	$3,879
1 1/2-car	3,325	3-car	5,281

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. (Base cost contains forced-warm-air heat only. For other types of heating/cooling use the 1-Story Heating and Cooling Adjustments for this square footage only).

For storage area above garage, add $17.15 per square foot (stairway, floorboards, electrical, 6-foot headroom).

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint and concrete slab.

Aluminum, corrugated	$16.76
Composition shingles	19.30
Built-up tar and gravel	20.28
Wood shingles	21.97
Fiberglass	16.37

PORCHES AND DECKS

Sym. Size for Rates	CONCRETE FLOOR with 42" foundation: PLATFORM PORCH CPP	COVERED PORCH CCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	WOOD FLOOR with 42" foundation: PLATFORM PORCH WPP	COVERED PORCH WCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	Sym. Size for Rates
25	34.00	65.00	114.00	164.00	64.50	95.50	145.00	195.00	**25**
50	29.50	57.50	92.50	125.00	54.00	81.50	117.00	150.00	**50**
75	28.00	55.00	85.00	113.00	45.75	72.50	103.00	130.00	**75**
100	26.25	52.50	80.00	105.00	37.50	63.50	91.00	116.00	**100**
125	25.63	51.41	76.35	97.93	35.63	61.25	86.50	108.50	**125**
150	25.00	50.50	73.50	92.50	33.75	59.00	82.00	101.00	**150**
175	24.32	49.12	71.05	88.68	31.88	56.75	78.50	96.50	**175**
200	23.65	48.25	69.00	85.50	30.00	54.50	75.00	92.00	**200**
250	22.27	45.76	65.06	80.13	26.38	50.13	69.50	84.75	**250**
300	20.90	43.75	62.00	76.00	22.75	45.75	64.00	77.50	**300**
400	20.74	43.49	61.62	75.49	22.45	45.31	63.39	76.83	**400**
450	20.67	43.39	61.46	75.28	22.30	45.08	63.08	76.50	**450**
500	20.59	43.30	61.32	75.09	22.15	44.86	62.78	76.17	**500**
600	20.43	43.14	61.08	74.77	21.85	44.42	62.17	75.50	**600**
700	20.28	43.00	60.88	74.50	21.55	43.97	61.56	74.83	**700**

Size for Rates	ADD: BASEMENT UNDER	DEDUCT: SHALLOW FOUNDATION	WOOD DECKS: TREATED WOOD	PINE OR SIMILAR	REDWOOD OR CEDAR	Size for Rates
25	30.97	-16.69	46.88	37.49	50.86	**25**
50	30.12	-12.19	34.82	27.84	38.99	**50**
75	29.67	-10.11	28.75	23.00	35.09	**75**
100	29.34	-8.87	25.43	20.34	30.19	**100**
125	29.08	-8.02	24.12	19.31	29.74	**125**
150	28.82	-7.37	22.66	18.14	28.04	**150**
175	28.69	-6.91	21.50	17.20	26.67	**175**
200	28.49	-6.45	20.67	16.50	25.10	**200**
250	28.23	-5.87	19.03	15.22	23.76	**250**
300	28.04	-5.41	17.86	14.29	22.39	**300**
400	27.71	-4.76	16.20	12.95	20.39	**400**
450	27.58	-4.50	15.54	12.44	19.64	**450**
500	27.45	-4.30	15.00	12.00	18.97	**500**
600	27.25	-3.91	14.08	11.27	17.88	**600**
700	27.12	-3.65	13.37	10.69	17.02	**700**

For details of building materials included in Porches, see Glossary under symbol name. Example: For concrete platform porch, see Glossary under "CPP". For a more complete discussion of porches and decks, refer to Class BC Site-built, "Adjustments and Additions", Page 87.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS B

TOWN HOUSES AND DUPLEXES





GENERAL DESCRIPTION

Class B Town Houses and Duplexes can be of custom designed, stock plans or can be individually designed. Much consideration is given to both exterior and interior details and refinements. Materials and workmanship are of high quality.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Wood frame with siding. Well-designed fenestration using a high-grade sash.

ROOF STRUCTURE: Wood structure with wood shakes.

INTERIOR PARTITIONS AND FINISH: Wood framed, with well finished drywall. Some walls can be wallpapered or paneled. Doors are high-quality hardwood or panel. Common partition wall with adjacent units will have good soundproofing. Bedrooms have spacious walk-in closets or wardrobes with sliding doors and built-in features. Base, casing, and moldings are well finished hardwood.

INSULATION: Wall and ceiling insulation based on an extreme climate are included in the base costs.

FLOOR FINISH: Carpet, hardwood, and vinyl tile or linoleum.

CEILING: Well finished drywall. Some ceilings are sprayed. Enamel paint in kitchen and bath.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOOR: Concrete slab, floor drains.

FLOOR CONSTRUCTION: Wood joists and bridging beams and posts. Wood subfloor also on upper-story floors.

HEATING AND AIR CONDITIONING: Forced air heating system with substantial output and ductwork.

ELECTRICAL: Numerous convenience outlets. Luminous fixtures in kitchen and baths.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Hardwood or hardwood veneer kitchen cabinets. Counter tops are ceramic tile. Cabinets can include built-in features such as desk or island bar.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TOWN HOUSES AND DUPLEXES

CLASS B

SQUARE FOOT COSTS

The following Square Foot Cost tables are representative of the occupancies described on the adjacent page. **PLEASE NOTE:** Costs include an unfinished concrete block basement. The columns entitled "Wood Basement", "Crawl Space", and "Slab on Grade" are for adjusting your occupancy if it differs from the base. For other adjustments, see following pages.

INSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	215.99	258.65	369.03	289.99	285.16	-10.25	-50.50	-55.70	**400**
500	210.37	263.43	360.31	282.12	287.68	-9.44	-47.56	-52.76	**500**
600	206.67	273.25	360.03	276.17	296.50	-8.63	-44.63	-49.83	**600**
700	204.08	267.56	352.34	271.33	290.06	-7.81	-41.69	-46.89	**700**
800	202.18	262.56	344.34	267.18	284.31	-7.00	-38.75	-43.95	**800**
900	201.87	254.53	330.41	265.27	274.53	-6.55	-36.95	-42.15	**900**
1000	198.78	249.94	324.32	260.58	269.45	-6.10	-35.15	-40.35	**1000**
1200	194.05	244.71	315.59	254.25	263.72	-5.65	-33.35	-38.55	**1200**
1400	188.88	239.31	307.42	247.48	257.56	-5.20	-31.55	-36.75	**1400**
1600	185.04	233.45	300.58	242.04	250.96	-4.75	-29.75	-34.95	**1600**
1800	182.14	229.44	297.38	238.04	246.95	-4.39	-29.15	-34.35	**1800**
2000	179.40	225.57	294.34	234.20	243.08	-4.03	-28.55	-33.75	**2000**
2200	176.77	222.19	291.41	230.47	238.95	-3.67	-27.95	-33.15	**2200**
2400	174.23	218.90	288.57	226.83	234.91	-3.31	-27.35	-32.55	**2400**
2600	172.26	215.68	285.80	223.76	230.94	-2.95	-26.75	-31.95	**2600**

OUTSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
400	232.49	280.65	393.03	306.49	308.66	-11.00	-54.50	-59.70	**400**
500	226.12	283.30	382.06	297.87	309.43	-10.13	-51.31	-56.51	**500**
600	221.67	291.00	383.53	291.17	316.50	-9.25	-48.13	-53.33	**600**
700	218.33	285.06	373.59	285.58	309.06	-8.38	-44.94	-50.14	**700**
800	215.68	279.81	366.34	280.68	302.31	-7.50	-41.75	-46.95	**800**
900	214.77	271.18	350.31	278.17	291.93	-7.00	-39.85	-45.05	**900**
1000	211.58	265.99	345.12	273.38	286.25	-6.50	-37.95	-43.15	**1000**
1200	206.75	260.16	335.29	266.95	279.92	-6.00	-36.05	-41.25	**1200**
1400	201.48	253.91	326.02	260.08	273.67	-5.50	-34.15	-39.35	**1400**
1600	196.54	247.95	318.08	253.54	266.21	-5.00	-32.25	-37.45	**1600**
1800	194.09	243.89	314.63	249.99	261.77	-4.65	-31.60	-36.80	**1800**
2000	190.80	239.97	311.34	245.60	257.48	-4.30	-30.95	-36.15	**2000**
2200	187.62	235.79	308.16	241.32	252.80	-3.95	-30.30	-35.50	**2200**
2400	185.53	231.70	305.07	238.13	248.21	-3.60	-29.65	-34.85	**2400**
2600	182.51	227.68	302.05	234.01	243.69	-3.25	-29.00	-34.20	**2600**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

EXTERIOR FINISH

For other than wood siding, make the following adjustments to the cost per square foot of ground area:

Masonry veneer	+6%
Common brick	+10%
Face brick/stone	+14%
Concrete block	+3%

ROOF STRUCTURE

For other than wood structure with wood shake, make the following adjustment per square foot of ground area:

Wood shingle	-$.45
Concrete tile	9.45
Composition roll deduct	-5.54
Comp. shingle/built-up rock deduct	-2.84
Metal, preformed	1.51

HEATING AND COOLING: Additions or deductions per square foot of ground area.

	Number of Stories				
	1	1 1/2	2	Bi	Tri
HEATING SYSTEMS					
Forced-warm-air, without return ducts, deduct	-1.00	-1.51	-2.01	-2.01	-1.51
Forced-hot-water/steam, add	5.60	8.39	11.19	11.19	8.39
Electric wall heaters, baseboard type, deduct	-1.05	-1.57	-2.10	-2.10	-1.57
Electric, ceiling radiant, deduct	-2.09	-3.14	-4.18	-4.18	-3.14
Electric wall heaters, deduct	-4.94	-7.41	-9.89	-9.89	-7.41
Radiant (in-floor), add	6.57	9.86	13.15	13.15	9.86
HEATING AND COOLING COMBINED SYSTEMS					
Forced air, A/C using heating ducts, add	10.07	15.10	20.14	20.14	15.10
Heat pump with supplemental heat, add	7.45	11.17	14.90	14.90	11.17
Air conditioning only with separate ducts, add	12.55	18.83	25.10	25.10	18.83
No heating, deduct	-7.99	-11.98	-15.98	-15.98	-11.98

Wood-burning unit added on to furnace: Add $4,284 to the final cost of home. Includes material and labor to connect to existing forced-air system. Extra chimney or flue costs which may be required by local codes are not included.

PLUMBING

Average cost per fixture	$3,162
Extra bath, three fixtures	9,976
Two fixtures	6,651
Water softener, automatic	2,458
Manual	1,760
Extra toilet	2,536
Extra sink	1,656
Separate shower (fiberglass)	3,032
Bathroom vent fan	417

FIREPLACES

Stories	1	2
Inside chimney	$8,425	$10,300
Outside chimney	10,425	12,575
Prefabricated	4,750	5,930

For other fireplaces, see Unit-in-Place costs.

PORCHES

For exterior stairways, add per flight as follows:

	Unfinished Soffit	Plastered Soffit
Wood	$2,875	$3,225
Cement composition	4,825	5,200

For porches, refer to Class B residential porch schedule, page 103, or see next page.

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room	$29.41
Finished living area	56.53
Walk-out, below grade, cost of door	2,647
Walk-out, above grade, cost of door	4,290

BUILT-INS

Appliance allowance, (if not itemized)	$6,650
Cooktop, countertop, four burners	1,480
Dishwasher, built-in	1,402
Garbage disposal	424
Heater, bathroom, without fan	306
With fan	443
Hot tub, with whirlpool, built-in	10,576
Hood, range, unvented	554
Vented	913
Intercom system, master station	1,121
Satellite	202
Whirlpool tub (Jacuzzi)	13,986
Whirlpool tub when it replaces regular bathtub	10,400
Oven, single, built-in	2,432
Microwave	1,095
Range, drop in, with standard oven	1,917
With self cleaning oven	2,810
Sauna with heater and controls	12,544
Trash compactor	1,148
Vacuum, central system	2,980

WATER AND WASTE DISPOSAL

City water and sewer connections	$4,271
Water well, 200 feet	11,997
Septic system, 1,500 gallons	8,769
2,000 gallons	11,377

The cost for each unit over one for water and sewer will vary by location.

OTHER ADJUSTMENTS

Please refer to Class B Site-built residences, Adjustments and Additions, Pages 102-105 and Unit-in-Place sections.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES: Base costs include electric lighting.

Size in Sq. Ft.	On slab – 18" Foundation: Siding	Block	Brick	On slab – 42" Foundation: Siding	Block	Brick	Finished Interior	Size in Sq. Ft.
240	77.20	86.91	95.26	84.11	95.52	103.21	13.43	**240**
308	70.74	78.89	86.19	76.94	86.46	93.24	12.45	**308**
352	67.55	74.91	81.70	73.35	82.02	88.28	12.00	**352**
400	64.61	71.26	77.65	70.09	77.91	83.78	11.54	**400**
440	62.85	69.11	75.18	68.07	75.50	81.04	11.21	**440**
480	61.22	67.22	73.02	66.24	73.28	78.63	11.02	**480**
528	59.53	65.13	70.68	64.35	71.00	76.09	10.76	**528**
600	57.31	62.53	67.74	61.87	68.00	72.83	10.37	**600**
800	52.68	57.25	61.74	56.66	62.01	66.18	9.65	**800**
1020	48.90	52.68	56.59	52.36	56.85	60.44	8.80	**1020**
Common wall deduction for attached garage								
1/2-wall	1,493	1,708	1,989	1,708	2,015	2,236	—	**1/2-wall**
1-wall	2,980	3,495	3,984	3,416	4,023	4,473	—	**1-wall**
1 1/2-wall	4,473	5,242	5,972	5,125	6,038	6,709	—	**1 1/2-wall**
2-wall	5,959	6,989	7,961	6,833	8,052	8,945	—	**2-wall**

No concrete floor, deduct. . . . . -$8.74

Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated garage doors, add per square foot of door:

Single. . . . . $8.22 Double. $6.13

Door opener, add for radio controlled. 730

For basement garage, add to residence:

1-car. . . . . $2,934 2-car. $4,173

1 1/2-car. 3,553 3-car. 5,672

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. (Base cost contains forced-warm-air heat only. For other types of heating/cooling use the 1-Story Heating and Cooling Adjustments for this square footage only).

For storage area above garage, add $20.67 per square foot (stairway, floorboards, electrical, 6-foot headroom).

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint and concrete slab.

Aluminum, corrugated. $18.45

Composition shingles. 21.52

Built-up tar and gravel. 22.69

Wood shingles. 24.45

Fiberglass. 18.00

PORCHES AND DECKS

Sym. Size for Rates	CONCRETE FLOOR with 42" foundation: PLATFORM PORCH CPP	COVERED PORCH CCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	WOOD FLOOR with 42" foundation: PLATFORM PORCH WPP	COVERED PORCH WCP	SCREEN-ENCLOSED PORCH CSEP	GLASS-ENCLOSED PORCH CGEP	Sym. Size for Rates
25	36.25	70.50	129.00	187.00	68.50	102.00	161.00	219.00	**25**
50	32.25	63.00	104.00	143.00	60.50	91.00	132.00	171.00	**50**
75	31.00	61.00	96.50	129.00	51.00	81.00	116.00	149.00	**75**
100	29.75	59.00	91.50	120.00	41.75	71.00	103.00	132.00	**100**
125	29.00	57.63	87.01	112.08	39.75	68.50	98.00	124.00	**125**
150	28.25	56.50	83.50	106.00	37.75	66.00	93.00	116.00	**150**
175	27.50	55.08	80.78	101.64	35.75	63.75	89.25	110.50	**175**
200	26.75	54.00	78.50	98.00	33.75	61.50	85.50	105.00	**200**
250	25.27	51.51	74.28	91.78	29.75	56.50	79.25	97.00	**250**
300	23.80	49.50	71.00	87.00	25.75	51.50	73.00	89.00	**300**
400	23.64	49.18	70.55	86.49	25.45	51.06	72.39	88.33	**400**
450	23.57	49.05	70.37	86.28	25.30	50.83	72.08	88.00	**450**
500	23.49	48.93	70.21	86.10	25.15	50.61	71.78	87.67	**500**
600	23.33	48.73	69.93	85.78	24.85	50.17	71.17	87.00	**600**
700	23.18	48.56	69.69	85.51	24.55	49.72	70.56	86.33	**700**

Size for Rates	ADD: BASEMENT UNDER	DEDUCT: SHALLOW FOUNDATION	WOOD DECKS: TREATED WOOD	PINE OR SIMILAR	REDWOOD OR CEDAR	Size for Rates
25	34.36	-16.82	48.70	38.99	52.88	**25**
50	33.38	-12.32	36.25	28.95	40.62	**50**
75	32.86	-10.24	29.93	23.94	36.50	**75**
100	32.47	-9.00	26.54	21.19	31.49	**100**
125	32.14	-8.15	25.14	20.11	30.94	**125**
150	31.88	-7.50	23.62	18.89	29.17	**150**
175	31.69	-6.98	22.40	17.92	27.75	**175**
200	31.56	-6.59	21.52	17.21	26.15	**200**
250	31.23	-5.93	19.83	15.87	24.72	**250**
300	31.04	-5.48	18.63	14.90	23.30	**300**
400	30.64	-4.76	16.89	13.51	21.23	**400**
450	30.51	-4.56	16.22	12.97	20.45	**450**
500	30.38	-4.30	15.65	12.52	19.76	**500**
600	30.12	-3.98	14.70	11.76	18.62	**600**
700	29.93	-3.72	13.95	11.16	17.72	**700**

For details of building materials included in Porches, see Glossary under symbol name. Example: For concrete platform porch, see Glossary under "CPP". For a more complete discussion of porches and decks, refer to Class B Site-built, "Adjustments and Additions", Page 103.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS A

TOWN HOUSES AND DUPLEXES





GENERAL DESCRIPTION

Class A Town Houses and Duplexes are individually designed, with much consideration given to both exterior and interior detail and refinements. Materials and workmanship are of high quality.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Wood frame with siding. Well-designed fenestration, using a high-grade sash.

ROOF STRUCTURE: Wood structure with wood shakes.

INTERIOR PARTITIONS AND FINISH: Wood framed, with well finished drywall. Many walls may be wallpapered or paneled. Doors are high-quality hardwood or raised panel. Common partition wall with adjacent units will have very good soundproofing. Bedrooms have spacious walk-in closets or wardrobes with sliding doors and built-in features. Base, casing, and moldings are well finished hardwood.

INSULATION: Wall and ceiling insulation based upon an extreme climate is included in the base costs.

FLOOR FINISH: High-quality carpet, hardwood and vinyl tile.

CEILING: Well finished drywall. Some ceilings are sprayed. Enamel paint in kitchen and bath.

FOUNDATION: Concrete perimeter foundation with continuous foundation under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOOR: Concrete slab, floor drains.

FLOOR CONSTRUCTION: Wood joists and bridging beams and posts. Wood subfloor also on upper-story floors.

HEATING AND AIR CONDITIONING: Forced air heating system with substantial output and ductwork.

ELECTRICAL: Convenience outlets throughout. Luminous fixtures in kitchen and baths.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Hardwood or hardwood veneer kitchen cabinets. Counter tops are ceramic tile. Cabinets can include built-in features such as desk or island bar.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TOWN HOUSES AND DUPLEXES

CLASS A

SQUARE FOOT COSTS

The following Square Foot Cost tables are representative of the occupancies described on the adjacent page. **PLEASE NOTE:** Costs include an unfinished concrete block basement. The columns entitled "Wood Basement", "Crawl Space", and "Slab on Grade" are for adjusting your occupancy if it differs from the base. For other adjustments, see following pages.

INSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
900	226.76	284.48	361.93	304.76	309.98	-7.75	-43.75	-49.80	**900**
1000	222.76	280.47	360.55	296.51	305.22	-7.13	-41.31	-47.36	**1000**
1200	218.97	275.68	354.39	290.47	299.68	-6.50	-38.88	-44.93	**1200**
1400	215.85	270.09	348.90	285.10	294.09	-5.88	-36.44	-42.49	**1400**
1600	211.15	264.87	343.82	278.15	287.37	-5.25	-34.00	-40.05	**1600**
1800	208.90	261.76	339.57	275.40	283.89	-5.10	-33.73	-39.78	**1800**
2000	206.85	258.83	338.52	272.85	280.58	-4.94	-33.46	-39.51	**2000**
2200	204.94	256.04	337.61	270.44	277.42	-4.79	-33.19	-39.24	**2200**
2400	203.13	253.36	336.80	268.13	274.36	-4.63	-32.92	-38.97	**2400**
2600	201.41	252.64	336.08	265.91	273.64	-4.48	-32.65	-38.70	**2600**
2650	200.79	252.27	335.71	264.79	273.27	-4.33	-32.38	-38.43	**2650**
2700	200.17	251.90	335.34	263.67	272.90	-4.17	-32.12	-38.17	**2700**
2750	199.56	251.54	334.98	262.56	272.54	-4.02	-31.85	-37.90	**2750**
2800	198.95	251.17	334.62	261.45	272.17	-3.87	-31.58	-37.63	**2800**
2850	198.34	250.82	334.26	260.34	271.82	-3.71	-31.31	-37.36	**2850**
2900	197.74	250.46	333.91	259.24	271.46	-3.56	-31.04	-37.09	**2900**
2950	197.13	250.11	333.55	258.13	271.11	-3.40	-30.77	-36.82	**2950**
3000	196.54	249.77	333.21	257.04	270.77	-3.25	-30.50	-36.55	**3000**

OUTSIDE UNIT: Apply to ground floor area.

Ground Area	1 Story	1 1/2 Story	2 Story	Bi-Level	Tri-Level	Wood Basement	Crawl Space	Slab on Grade	Ground Area
900	238.51	303.23	396.18	318.51	331.73	-5.50	-47.50	-53.55	**900**
1000	238.32	299.04	389.99	312.07	326.04	-5.56	-44.88	-50.93	**1000**
1200	234.34	294.06	381.01	305.84	319.56	-5.63	-42.25	-48.30	**1200**
1400	230.04	286.78	372.71	299.29	312.28	-5.69	-39.63	-45.68	**1400**
1600	225.15	281.37	364.82	292.15	306.87	-5.75	-37.00	-43.05	**1600**
1800	222.88	277.87	360.36	289.38	302.62	-5.58	-36.71	-42.76	**1800**
2000	220.81	274.54	360.10	286.81	298.54	-5.40	-36.42	-42.47	**2000**
2200	218.88	271.74	359.97	284.38	294.61	-5.23	-36.13	-42.18	**2200**
2400	216.06	269.04	359.96	281.06	290.79	-5.06	-35.85	-41.90	**2400**
2600	214.32	268.30	360.03	278.82	289.88	-4.88	-35.56	-41.61	**2600**
2650	213.68	267.90	360.44	277.68	289.32	-4.71	-35.27	-41.32	**2650**
2700	213.04	267.52	360.86	276.54	288.77	-4.54	-34.98	-41.03	**2700**
2750	212.41	267.13	361.29	275.41	288.22	-4.37	-34.69	-40.74	**2750**
2800	211.78	266.75	361.71	274.28	287.67	-4.19	-34.40	-40.45	**2800**
2850	211.15	266.38	362.15	273.15	287.13	-4.02	-34.12	-40.17	**2850**
2900	210.52	266.00	362.58	272.02	286.58	-3.85	-33.83	-39.88	**2900**
2950	209.90	265.63	363.02	270.90	286.05	-3.67	-33.54	-39.59	**2950**
3000	209.29	265.27	363.46	269.79	285.52	-3.50	-33.25	-39.30	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

EXTERIOR FINISH

For other than wood siding, make the following adjustments to the cost per square foot of ground area:

Masonry veneer	+5%
Common brick	+8%
Face brick/stone	+12%
Concrete block	+2%

ROOF STRUCTURE

For other than wood structure with wood shake, make the following adjustment per square foot of ground area:

Wood shingle deduct	-$.55
Concrete or clay tile	10.66
Composition roll deduct	-6.24
Comp. shingle/built-up rock deduct	-3.04
Metal, formed	1.61

HEATING AND COOLING: Additions or deductions per square foot of ground area.

	Number of Stories				
	1	1 1/2	2	Bi	Tri
HEATING SYSTEMS					
Forced-warm-air, without return ducts, deduct	-0.97	-1.46	-1.94	-1.94	-1.46
Forced-hot-water/steam, add	6.31	9.46	12.61	12.61	9.46
Electric wall heaters, baseboard type, deduct	-1.24	-1.86	-2.47	-2.47	-1.86
Electric, ceiling radiant, deduct	-2.51	-3.76	-5.02	-5.02	-3.76
Electric wall heaters, deduct	-5.70	-8.56	-11.41	-11.41	-8.56
Radiant (in-floor), add	7.62	11.43	15.24	15.24	11.43
HEATING AND COOLING COMBINED SYSTEMS					
Forced air, A/C using heating ducts, add	11.23	16.85	22.47	22.47	16.85
Heat pump with supplemental heat, add	8.61	12.91	17.21	17.21	12.91
Air conditioning only with separate ducts, add	14.13	21.20	28.26	28.26	21.20
No heating, deduct	-9.08	-13.62	-18.16	-18.16	-13.62

Wood-burning unit added on to furnace: Add $5,076 to the final cost of home. Includes material and labor to connect to existing forced-air system. Extra chimney or flue costs which may be required by local codes are not included.

PLUMBING

Average cost per fixture	$3,912
Extra bath, three fixtures	12,323
Two fixtures	8,215
Water softener, automatic	2,510
Manual	1,923
Extra toilet	3,130
Extra sink	2,060
Separate shower (fiberglass)	3,534
Bathroom vent fan	509

FIREPLACES

Stories	1	2
Inside chimney	$9,600	$11,650
Outside chimney	11,900	14,300
Prefabricated	5,650	7,120

For other fireplaces, see Unit-in-Place costs.

PORCHES

For exterior stairways, add per flight as follows:

	Unfinished Soffit	Plastered Soffit
Wood	$3,325	$3,725
Cement composition	5,650	6,050

For porches, refer to Class A residential porch schedule, page 119, or see next page.

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room	$34.49
Finished living area	67.87
Walk-out, below grade, cost of door	3,051
Walk-out, above grade, cost of door	5,164

BUILT-INS

Appliance allowance, (if not itemized)	$9,402
Cooktop, countertop, four burners	1,845
Dishwasher, built-in	1,721
Garbage disposal	502
Heater, bathroom, without fan	352
With fan	509
Hot tub, with whirlpool, built-in	12,271
Hood, range, unvented	672
Vented	1,076
Intercom system, master station	1,278
Satellite	222
Whirlpool tub (Jacuzzi)	17,168
Whirlpool tub when it replaces regular bathtub	12,571
Oven, single, built-in	2,993
Microwave	1,519
Range, drop in, with standard oven	2,223
With self cleaning oven	3,338
Sauna with heater and controls	15,661
Trash compactor	1,265
Vacuum, central system	3,136

WATER AND WASTE DISPOSAL

City water and sewer connections	$4,955
Water well, 200 feet	12,812
Septic system, 1,500 gallons	9,519
2,000 gallons	12,453

The cost for each unit over one for water and sewer will vary by location.

OTHER ADJUSTMENTS

Please refer to Class A Site-built residences, Adjustments and Additions, Pages 118-121 and Unit-in-Place sections.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES: Base costs include electric lighting.

Size in Sq. Ft.	On slab – 18" Foundation: Siding	Block	Brick	On slab – 42" Foundation: Siding	Block	Brick	Finished Interior	Size in Sq. Ft.
240	99.50	105.23	115.01	106.02	113.58	122.38	15.52	**240**
308	92.32	97.60	106.08	98.19	105.04	112.67	14.54	**308**
352	88.67	93.69	101.58	94.21	100.73	107.78	14.08	**352**
400	85.35	90.17	97.47	90.56	96.82	103.34	13.63	**400**
440	83.26	87.89	94.87	88.22	94.28	100.41	13.30	**440**
480	81.37	85.87	92.45	86.13	92.00	97.87	13.04	**480**
528	79.35	83.72	89.98	83.91	89.58	95.13	12.78	**528**
600	76.74	80.91	86.72	81.04	86.46	91.54	12.39	**600**
800	71.07	75.11	79.61	74.72	79.94	83.72	11.54	**800**
1020	66.44	70.35	74.46	69.57	74.52	78.11	10.63	**1020**
Common wall deduction for attached garage								
1/2-wall	1,786	1,845	2,275	2,002	2,152	2,523	—	**1/2-wall**
1-wall	3,573	3,769	4,551	4,010	4,303	5,046	—	**1-wall**
1 1/2-wall	5,359	5,653	6,826	6,011	6,455	7,563	—	**1 1/2-wall**
2-wall	7,139	7,544	9,102	8,013	8,600	10,086	—	**2-wall**

No concrete floor, deduct. . . . . -$9.91

Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated garage doors, add per square foot of door:

Single. . . . . $9.78 Double. $7.24

Door opener, add for radio controlled. 822

For basement garage, add to residence:

1-car. . . . . $3,195 2-car. $4,499

1 1/2-car. 3,847 3-car. 6,161

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. (Base cost contains forced-warm-air heat only. For other types of heating/cooling use the 1-Story Heating and Cooling Adjustments for this square footage only).

For storage area above garage, add $27.64 per square foot (stairway, floorboards, electrical, 6-foot headroom).

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint and concrete slab.

Aluminum, corrugated. $20.60

Composition shingles. 24.25

Built-up tar and gravel. 25.82

Wood shingles. 27.58

Clay tile. 40.16

Wood shingles. 32.40

Wood shingles. 20.08

PORCHES AND DECKS

Sym.	CONCRETE FLOOR with 42" foundation				WOOD FLOOR with 42" foundation				Sym.
Size for Rates	**PLATFORM PORCH CPP**	**COVERED PORCH CCP**	**SCREEN-ENCLOSED PORCH CSEP**	**GLASS-ENCLOSED PORCH CGEP**	**PLATFORM PORCH WPP**	**COVERED PORCH WCP**	**SCREEN-ENCLOSED PORCH CSEP**	**GLASS-ENCLOSED PORCH CGEP**	**Size for Rates**
25	39.50	92.00	163.00	233.00	72.50	125.00	196.00	266.00	**25**
50	35.75	84.50	135.00	182.00	67.50	116.00	167.00	213.00	**50**
75	35.00	83.00	126.00	165.00	57.00	105.00	148.00	187.00	**75**
100	34.25	81.00	120.00	155.00	46.75	93.50	133.00	168.00	**100**
125	33.38	79.64	114.96	145.40	44.50	91.00	127.00	158.00	**125**
150	32.50	78.50	111.00	138.00	42.25	88.50	121.00	148.00	**150**
175	31.63	77.00	107.74	132.55	40.13	86.00	116.50	141.50	**175**
200	30.75	76.00	105.00	128.00	38.00	83.50	112.00	135.00	**200**
250	29.13	73.25	100.23	121.25	33.63	78.25	105.00	126.50	**250**
300	27.50	71.00	96.50	116.00	29.25	73.00	98.00	118.00	**300**
400	27.34	70.55	95.86	115.23	28.95	72.56	97.39	117.33	**400**
450	27.27	70.37	95.60	114.92	28.80	72.33	97.08	117.00	**450**
500	27.19	70.21	95.37	114.64	28.65	72.11	96.78	116.67	**500**
600	27.03	69.93	94.97	114.16	28.35	71.67	96.17	116.00	**600**
700	26.88	69.69	94.63	113.75	28.05	71.22	95.56	115.33	**700**


	ADD	DEDUCT		WOOD DECKS			
Size for Rates	**BASEMENT UNDER**	**SHALLOW FOUNDATION**		**TREATED WOOD**	**PINE OR SIMILAR**	**REDWOOD OR CEDAR**	**Size for Rates**
25	39.05	-17.02		51.25	41.01	55.68	**25**
50	37.88	-12.45		38.21	30.51	42.90	**50**
75	37.16	-10.37		31.53	25.26	38.57	**75**
100	36.71	-9.06		28.04	22.43	33.25	**100**
125	36.32	-8.22		26.48	21.22	32.72	**125**
150	36.06	-7.56		24.88	19.94	30.85	**150**
175	35.79	-7.04		23.60	18.92	29.35	**175**
200	35.53	-6.65		22.69	18.13	27.64	**200**
250	35.21	-6.00		20.90	16.76	26.17	**250**
300	34.95	-5.54		19.64	15.75	24.67	**300**
400	34.49	-4.82		17.80	14.28	22.49	**400**
450	34.30	-4.56		17.10	13.72	21.65	**450**
500	34.10	-4.37		16.50	13.24	20.93	**500**
600	33.84	-4.04		15.50	12.44	19.73	**600**
700	33.58	-3.72		14.71	11.80	18.78	**700**

For details of building materials included in Porches, see Glossary under symbol name. Example: For concrete platform porch, see Glossary under "CPP". For a more complete discussion of porches and decks, refer to Class A Site-built, "Adjustments and Additions", Page 119.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOCATED IN INGHAM COUNTY — 2014 ASSESSMENT YEAR — 1 SPACE = 4' — PRICING EXA

TYPE: Single Family	Trim & Decoration: Exc. / X Ord. / Min	Wall Fur. / Flr. Fur.	12. ELECTRIC: Amps Service EACH		
X TRI-PLEX	Size and No. of Closets: Lg. / X Ord. / Small	No Heat / 1st FL / 2nd FL	No. & Qual. Elec. Futures: Exc. / X Ord / Min		
Year Built 1995 / Year Remod	Many / X Ord. / Few	Central Air Cond. Tons	No. Electric Outlets: Many / X Ord / Few		
Number of Rooms / Unit	Doors: Solid / X H.C.	13. PLUMBING 3 x 2,275	(6825)		
1 Basement	5. FLOORS: Kitchen Fl. VINYL	1 1/2 No. of Baths / UNIT 2,275			
4 1st floor	Other CARPET	Extra Stool / Extra Lav.			
2nd floor		Ceramic Floor			
1 1/2 Baths	6. CEILINGS	Ceramic Wainscot			
2 Total Bedrooms	X Drywall / Plaster	Tub Alcove / Fan			
1. EXTERIOR: Wood, Shingle	Tile / Suspended	Separate Shower			
X Aluminum, Vinyl		Water Softener: Owned / Leased			
Brick	7. EXCAVATION: Basement 800 ft / UNIT	Water Heater Gallons: 30 X Gas / Elec.			
Block	Crawl S.F.	14. 2225 x 2 *	(14450)		
Insulation	Slab S.F.	WATER: X Public / Well			
2. WINDOWS	Height to Joists 7'4" FT.	SEWER: X Public / Septic			
Many / Large	8. BSMT. WALLS & FLOORS	15. BUILT-IN ITEMS / UNIT 620 x 3	(1860)		
X Avg. / X Avg.	8" Conc. Blk / Poured	Oven / Cooktop			
Few / Small	Treated Wood	Drop-in Range / X Disposal 195			
Wood Sash	X Concrete Floor	X Hood vented 425 / Microwave			
Metal Sash	9. BASEMENT FIN. $	Dishwasher / Compactor			
X Vinyl Sash	Wall Finish				
X Double Hung	Floor Finish	Fireplace / Fdn. / Pre-Fab			
Horiz. Sliding	Ceiling Finish	Free-standing			
Casement		Chimney / 1 Sty. / 2 Sty. / Inside / Outside			
X Double Glass	Walkout				
Storms & Screens	Insulation	Cupboard Length AVE / Quality AVE			
	10. FLOOR SUPPORT	18. PORCHES PER UNIT			
3. ROOF	Joists 2x10", 16" o.c.	Type CCP / CPP			
X Gable / Gambrel	Unsupported Length 10'	Wide 5 / 5			
Hip / Mansard	Sill Plate X Yes / No	Deep 5 / 5			
Flat / X Eave/rgh	Diag. Sub Floor	17. GARAGE/CARPORT Year Built			
X Asphalt Shingles	Ply. Sub Floor 5/8	Attached / Cars / Separate			
	Center Support I-BEAM	Wide / Deep / Condition			
X Insulation		Exterior / Floors			
Chimney Type BLOCK	11. HEATING & AIR COND.	Doors / Finish			
Front overhang 12"	X Gas / Oil / Elc.	SIZE FOR RATES 800 S.F. CLASS C			
Other overhang 12"	Wood / Coal / Steam	Typical class of neighboring houses C			
4. INTERIOR	Forced Warm Air	Neighborhood is: Improving / X Stable / Declining			
X Drywall / Plaster	X Forced Warm Water	Condition for age AVE / Effective Age 1995			
Paneled	Stove or Space Heat	19 YEARS			

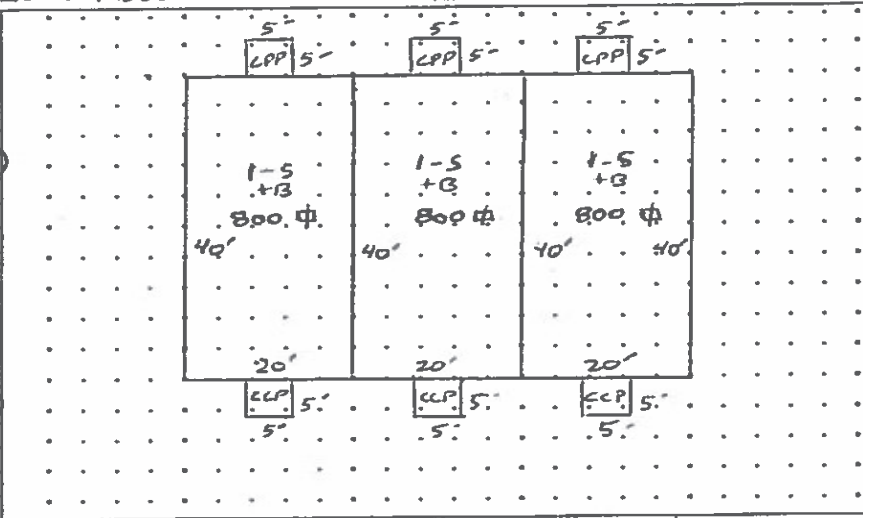

ITEM	SQ. FT./ LIN FT.	UNIT COSTS	BASE COST	COUNTY MULT.	DEPR. % GOOD	DEPRECIATED COST
INSIDE UNIT	800	98.20	78,560			
OUTSIDE UNITS	1600	104.49	167,184			
#13,14,15			13135			
#16 CCP	25x3 / 75	37.50	2813			
#16 CPP	25x3 / 75	20.80	1560			

* Cost per unit over one will vary by locale. Base rate here is doubled not tripled.

TOTAL BASE	263252	1.00	.81	213234
COUNTY MULTIPLIER	1.00			
COST NEW	263,252	Total Depr Cost: $		213,234
Priced / Date		E.C.F. X		
		True Cash Value $		

	INSIDE	OUTSIDE
BASE RATES	95.31	101.60
WARM WATER HEAT	2.89	2.89

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.