SECTIONAL TABLE OF CONTENTS

Sectional Table of Contents. . . . 218
Farm Buildings, General Description. . . . 219
Pricing Card Example. . . . 222
Barns, General Purpose, Special Purpose, Confinement and Bank. . . . 225
Commodity Barns, Hay, Free-stall and Sun Shelters. . . . 233
Milking Parlors (Dairies) and Milk Houses. . . . 235
Sheep Barns and Sheds. . . . 237
Farm Utility Storage and Loafing Sheds. . . . 239
Feeder Barns (Cattle Sheds). . . . 239
Hog Houses/Nursery and Breeding/Gestation Barns. . . . 243
Hog Houses/Farrowing and Finishing Barns. . . . 245
Hog and Modified Hog Sheds. . . . 247
Individual Livestock Shelters. . . . 247
Stables and High-value (Estate) Stables. . . . 249
Arenas and Equestrian Lean-tos. . . . 251
Poultry Houses, Cage Operations, Enclosed and Screened. . . . 253
Poultry Houses, Floor Operations, Breeder and Broiler. . . . 255
Turkey Barns. . . . 257
Farm Implement Buildings and Shelters. . . . 263
Arch-rib (Quonset) Farm Implement Buildings. . . . 263
Farm Implement Sheds. . . . 263
Arch-rib (Quonset) Utility Buildings. . . . 263
Farm Utility Buildings. . . . 265
Lean-tos. . . . 265
Toolshed Buildings. . . . 265
Farm Utility/Grain Storage Buildings. . . . 267
Corn Crib Buildings. . . . 267
Bag Fertilizer Storage. . . . 267
Bulk Fertilizer Storage. . . . 237
Greenhouses. . . . 269
Shade Houses. . . . 269
Seed Processing Storage. . . . 271
Fruit Packing Barns. . . . 271
Farm Cold Storage Buildings. . . . 271
Potato Storage. . . . 273
Fruit/Vegetable Buildings – Environmental. . . . 273
Migrant (Transient) Labor Cabins. . . . 275
Labor Dormitories (Bunk Houses). . . . 275
Corn Cribs. . . . 277
Horizontal Silos. . . . 277
Feed Lot Yard Improvements. . . . 278
Bunk Feeders. . . . 279
Silos. . . . 280
Grain Bins and Feed Tanks. . . . 281
Grain Tanks and Corrugated Metal Bins. . . . 282
Manure and Water Management Systems. . . . 282
Vertical Turbine Pumps. . . . 282
Well Jet Systems. . . . 282
Windmills. . . . 282
Slurry Tanks. . . . 282
Liquid Manure Tanks. . . . 283
Farm Building Depreciation Schedule 283

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM BUILDINGS

This section contains cost data for agricultural buildings and other structures and equipment most commonly found on farms. Each page contains written specifications showing the structural components used to calculate the base building cost, shown in tables as dollars for the entire structure or as costs per square foot.

Adjustment tables are provided so allowances can be made when a structure's components vary from those specified. Some pages also provide costs of equipment that might be associated with the structure described on that page. For wall height adjustments on buildings with high pitched roofs, use the height to the eaves, plus one-half the distance from the eaves to the ridge for the effective wall height with which to enter the story height multiplier table.

Costs are averages of final costs including architects' fees, contractors' overhead and profit, and cost of interim financing. They do not represent any building illustrated, except as the building is included in the averages.

The costs provided include professional construction labor. Agricultural structures may be built by small crews of nonunion labor doing all the masonry, carpentry, steel and roofing work. Electrical work, plumbing and painting are usually contracted separately.

Farm or ranch-built buildings must be graded according to the quality of workmanship and sometimes the value of the labor is very low, bringing the end costs below those listed. For buildings constructed by the owner, often using some second-hand material, 15%–30% may be deducted to reflect proper wage rates and lack of job supervision relative to the quality of the work. When the farm is an estate or showplace, up to 25% can be added for such items as Thermopane windows, residential type roofing, tiled floors or walls and extraordinary craftsmanship.

When applicable, each occupancy has costs for the various classes of construction–C, D, DPOLE, DHOOP ARCH and S. Pole construction is very common on farms; it is contained in Class D. These classes of construction are the same as those used in the commercial and industrial cost schedules, and are not to be confused with the class designations in the residential cost schedules.

CLASS DEFINITIONS: FARM BUILDINGS

The Class of Construction is the basic subdivision in the *Michigan Assessor's Manual*, dividing all buildings into four basic cost groups by type of framing (supporting columns and beams), walls, floors and roof structures.

Class C buildings have masonry or concrete exterior walls, and wood or steel roof and floor structures, except for concrete slab on grade.

Class D buildings generally have wood frame, floor and roof structure. They may have a concrete floor on grade and other substitute materials, but are considered combustible construction. They may have dirt floors.

Class DPOLE buildings have wood pole or post frames with metal walls and roof. They may have a concrete floor on grade or a dirt floor. This class includes all the pre-engineered pole- or post-frame buildings.

Class DHOOP ARCH (another subset of Class D) buildings are characterized by combustible, prefabricated, wood-post and tubular-steel, semicircular (hoop-quonset shape), framed roofs that curve to a short wooden pony wall or to the ground. The roof and walls are generally covered with canvas or a woven vinyl tarp. Ground floors are typically dirt or can be a concrete slab.

Class S buildings have frames, roofs, and walls of incombustible metal. They may have concrete floors on grade or dirt floors. This class includes all the pre-engineered metal buildings. The Class S slant-wall has a light open-steel skeleton modified A slant frame and wall shape.

In each class, there will be variations, combinations, and subclasses, but for the purposes of pricing the major elements of the building should be considered in selecting costs from the tables. Thus, if a building which is otherwise in Class S has girts and purlins or nailers that are wood, the costs for the Class S building may still be representative, or a Class C building may have concrete plank floors instead of wood. Interpolations may be made if the appraiser feels the building overlaps two classes sufficiently to affect the result.

Further details and sketches of the various construction types will be found in the commercial/industrial chapters. The following table summarizes the indicators of construction class.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS OF CONSTRUCTION INDICATORS

CLASS	FRAME	FLOOR	ROOF	WALLS
C	Masonry or concrete loadbearing walls with or without pilasters. Masonry or concrete walls with steel, wood or concrete frame.	Dirt floors or wood or concrete plank on steel floor joists or concrete slab on grade.	Wood or steel joists with wood or steel deck. Concrete plank.	Brick, concrete block or tile masonry, tilt-up, formed concrete, curtain walls.
D	Wood or steel studs in bearing wall, wood frame, primarily combustible construction.	Dirt floors or wood or steel floor joists or concrete slab on grade.	Wood or steel joists with wood or steel deck.	Almost any material except masonry or concrete. Generally combustible construction.
DPOLE	Wood posts or poles and trussed rafters.	Dirt floors or wood joists and deck or concrete slab on grade.	Metal skin on wood purlins or nailers.	Metal skin on wood girts or nailers.
DHOOP ARCH	Wood posts and tubular steel.	Dirt floors or concrete slab on grade.	Canvas or woven vinyl tarp on wooden pony wall or to the ground.	Canvas or woven vinyl tarp.
S	Metal bents, columns, girders, purlins and girts without fireproofing, incombustible construction.	Dirt floors or wood or steel deck on steel floor joists or concrete slab on grade.	Steel or wood deck on steel joists.	Metal skin or sandwich panels. Generally incombustible.

CAUTIONARY COMMENTS: State Tax Commission

1) Slurry tanks and similar holding structures may be eligible for exemption as part of a pollution control system provided the apparatus is certified by the State Tax Commission.

2) The State Tax Commission has ruled that silo unloaders are agricultural personal property and therefore exempt.

3) The built-in refrigeration systems found in on-farm fruit storage buildings are generally considered to be part of the real estate and should be priced from either the adjustments table or the commercial and industrial schedules.

4) Pumps which are an integral part of farm water wells are considered to be part of the real estate.

5) Movable irrigation equipment including pumps which are not an integral part of a well are agricultural property and therefore exempt.

On the following page is the Agricultural Card with examples of costing on the back.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Michigan Department of Treasury, State Tax Commission
641, Formerly L-4190 (Rev. 12-10)

AGRICULTURAL APPRAISAL CARD

County	**PHYSICAL AND ECONOMIC FACTORS**	**PROPERTY ADDRESS:**
Township	Road(s) / Town:	**TOTAL ACREAGE OWNED:**
Owner	Type(s) / Miles Away:	**SALE/PRODUCTIVITY ANALYSIS**
Parcel I.D.	☐ Electricity ☐ Telephone ☐ Gas Line	
Section Town Range	☐ Well ☐ Septic ☐ Public Water ☐ Public Sewer	
Description:	TILING: SIZE Land Rent $ /Acre	
	☐ Random ☐ Pattern Spacing: Acres:	

Soil Type	Slope	Produc. Group	No. of Acres	% Rating	Equiv. Acres

SALE DATA

Price: Sale Date:
Grantor: Liber/Page:
Grantee: Instrument:

TOTAL EQUIVALENT ACRES:

Sale Price of Tillable Land / Equiv. Acres = No. 1 Land Price $_____

LAND VALUE

Area No.	No. Acres	Value /A.	TOTAL
Surface R.O.W.s			

APPRAISAL SUMMARY

TOTAL LAND $_____
TOTAL LAND IMPROVEMENTS $_____
TOTAL BUILDINGS $_____
TOTAL APPRAISED VALUE $_____

ROUNDED TO: $_____

Yr.	Assessed Valuation	Board of Review	Tax Tribunal

FARM BUILDINGS AND IMPROVEMENTS (See attached sheets for residences) 2014 ASSESSMENT YEAR

Building Type	BANK BARN	FEEDER BARN	IMPLEMENT BUILDING	BUNK FEEDER	SILO	SILO	GRAIN BIN
Building Class	D	D POLE	D POLE	—	—	—	—
Building Quality	AVERAGE	LOW COST	AVERAGE	AVERAGE	—	—	—
Year Built	OLD	1983	1989	1985	1983	1985	1983
Year Remodeled	—	—	—	—	—	—	—
Dimensions	40'W x 60'L + 16' x 16' + 10' x 1/2 = 14' EFF. H	42'W x 60'L x 12' H	26'W x 54'L x 14' H	TWO SIDED 5'W x 60'L	16' DIA. x 50'L	20' DIA. x 59' H	18' DIA. x 15' H
Construction	WOOD FRAME	POLE FRAME	POLE FRAME	CONCRETE	CONCRETE STAVE	GLASS LINED STEEL	CORR. GALV. STEEL
Foundation	CONCRETE	POLE COLUMN	POLE COLUMN	CONCRETE	CONCRETE	CONCRETE	CONCRETE
Exterior	VERTICAL ROUGH LUMBER	GALV. STEEL 3 SIDES	COLORED STEEL 4 SIDED	CONCRETE & CONCRETE BLOCK	—	—	—
Roof Type	GABLE	GABLE	GABLE	NONE	DOME	DOME	CONICAL
Roof Cover	COMPOSITION SHINGLE	GALV. STEEL	COLORED STEEL	—	METAL	METAL	METAL
Basement Floor	CONCRETE	DIRT	DIRT	—	CONCRETE	CONCRETE	CONCRETE
Upper Floor	WOOD PLANK	—	—	—	—	—	—
Unit Cost	$17.50	$5.57	$13.14	$60.5 L.F. (1)	$22,800	$81,500	$8,750
Adjustments	ELECTRICAL (BASE)	NO ELECTRICAL (BASE)	GRADED DIRT FLOOR -3.16	($50 + 71) / 2	LADDER (BASE)	LADDER (BASE)	CONCRETE FLOOR +$900
Adjustments	WATER (BASE)	NO WATER (BASE)	(CONC. BASE -$3.45 DIRT GRADED +0.29)	—	CHUTE (BASE)	UNLOADER (PERS. PROPERTY)	→
Adjusted Unit Cost	$17.50	$5.57	$9.98	$60.50	$22,800	$81,500	$9,650
x Height Multiplier	x 1.077 (14' EFF. H)	x 1.038	x 1.077	x —	x —	x —	x —
x Perimeter Multiplier	x 1.0 (1) (200 PER. 2400 #)	x .991 (1) (100 PER. 2600 #)	x 1.02 (1) (100 PER. 2000 #)	x —	x —	x —	x —
Total Unit Cost	$19.04	$5.73	$10.96	$60.50	$22,800	$81,500	$9,650
x Square Feet	x 4800 #1	x 2520 #1	x 1944 #1	x 60 L.F.	x —	x —	x —
= Base Cost	$91,392	$14,440	$21,306	$3,630	$22,800	$81,500	$9,650
x County Multiplier	x .96	x .96	x .96	x .96	x .96	x .96	x .96
= Cost New	$87,730	$13,862	$20,454	$3,485	$21,888	$78,240	$9,264
Depreciation x % Good	x PHY. 30, FUNC. 35 (2)	x .50 (4)	x .56 (4)	x .52 (4)	x .35 (5)	x .38 (5)	x .35 (5)
= Depreciated Cost	$9,212	$6,931	$11,454	$1,812	$7,661	$29,731	$3,242
x E.C.F.	x .80 (3)	x .80	x .80	x .80	x .80	x .80	x .80
= True Cash Value	$7,370	$5,545	$9,163	$1,450	$6,129	$23,785	$2,594

Person Interviewed _____

Examined By _____ Date _____

Priced By _____ Date _____

Checked By _____ Date _____

Remarks: 1. INTERPOLATED NUMBERS FROM TABLES. 2. OBSERVED CONDITION, EST. FUNC. OBSOLESCENCE I.E. OVER BUILT 3. FROM SEPARATE MKT. ANALYSIS. REFER TO DETERMINATION OF ECONOMIC CONDITION FACTORS. 4. REFER TO FARM BLDG. DEPRECIATION TABLE, BLDG. COLUMN 5. REFER TO FARM BLDG. DEPRECIATION TABLE, SILO COLUMN, WHERE AGE = TAX YEAR − DATE OF CONSTRUCTION

Farm Buildings	$ 56,035
Residence No. 1	$ —
Residence No. 2	$ —
Other	$ —
Total to Front of Card	$ 56,035

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS



EXCELLENT CLASS D



EXCELLENT/GOOD CLASS S



GOOD CLASS D



GOOD/AVERAGE CLASS D



GOOD/AVERAGE CLASSES C & D



AVERAGE CLASS D

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS



AVERAGE CLASS D



LOW-COST/AVERAGE CLASS D
Barn with Gable Roof



LOW-COST/AVERAGE CLASS D
Bank Barn with Gable Roof



LOW-COST CLASS D
Bank Barn with Gable Roof



AVERAGE CLASS S FREESTALL



LOW-COST CLASS D POLE FREESTALL BARN



AVERAGE CLASS D HAY OR LIVESTOCK SHELTER



LOW-COST CLASS S SHELTER

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

OCCUPANCY DESCRIPTION: Multipurpose barn buildings that may include livestock stalls, hay/grain storage. Common "flat roofed" types are gable and shed roofs, which allow for loft areas. Higher quality barns include lighting, water service and concrete floor systems. Lower quality barns may have dirt floors.

Barn loft costs include the floor structure and supports only; height adjustments must usually be made.

Confinement barns are large, enclosed structures providing for the housing of cattle. The low quality structures have dirt floors and natural ventilated sidewalls. The average quality structures are environmental barns with feed areas and include some concrete alleyways.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Barn loft floors, heating systems and feed and cleaning equipment are not included.

BARNS - GENERAL PURPOSE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$53.50	Block or structural tile, some windows, good gable roof and trim	Concrete floor, stalls and feed room	Adequate lights and outlets, water service and drains
	Average	40.50	Brick, concrete block, structural clay tile, few windows, "flat roofed"	Unfinished, some slab or wood floor, stalls	Few electrical outlets and hose bibs
	Low Cost	31.00	Concrete block, light shed or gable roof, asphalt shingles	Unfinished, dirt floor, few cheap stalls	None
D	Good	47.00	Lap siding, windows, good frame and gable roof structure	Some wainscot, plank or concrete floors, stalls, feed room	Adequate lights and outlets, water service, drains
	Average	34.00	Wood frame, board and batten or low-cost siding, few windows	Some floor, few partitions and stalls, feed room	Few electrical outlets and hose bibs
	Low Cost	24.60	Light wood frame and shed or gable roof structure, board siding	Unfinished, dirt floor, few cheap stalls	None
D POLE	Good	41.00	Pole frame, metal siding, insulated, good gable roof and trim	Concrete or plank floors, stalls, feed room, interior sheathing	Adequate lights and outlets, water service and drains
	Average	29.25	Pole frame, metal siding, few windows or shutters, "flat roofed"	Some floor, few partitions and stalls, feed room	Few electrical outlets and hose bibs
	Low Cost	20.80	Pole frame, metal siding, light roof	Unfin., dirt floor, few cheap stalls	None
S	Good	44.75	Steel panels on steel frame, insulated, good gable roof and trim	Plank or concrete floors, stalls, feed room, interior sheathing	Adequate lights and outlets, water service and drains
	Average	32.50	Steel siding and frame, few windows or shutters, "flat roofed"	Some floor, few partitions and stalls, feed room	Few electrical outlets and hose bibs
	Low Cost	23.55	Steel siding and frame, light roof	Unfin. dirt floor, few cheap stalls	None

Stalls cost $ .98 to $5.91 with stall equipment (feed and water not automated) at $.48 to $2.44 per square foot of equipped area. Add for barn cleaner at $6.67 to $9.37 per square foot of area served.

HAYLOFTS

CDS	Good	$18.70	Not included	Heavy timber, good T&G or plank	Not included
	Average	12.05	Not included	Adequate support, plank floor	Not included
	Low Cost	7.78	Not included	Minimum support, light floor	Not included

For wall height adjustment on buildings with high-pitched roofs, use the height to the eaves plus one-half the distance from the eaves to the ridge for the effective wall height with which to enter the story height multiplier table. For an example, see page 229.

CONFINEMENT BARNS

D	Average	$30.50	Wood siding and frame, fully insulated and ventilated	Some paved alleyways, wainscot, dirt stalls, or pens	Adequate lighting and water service
	Low Cost	15.10	Boards and plywood, on box frame, some insulation, curtains or vents	Unfinished, dirt floor	Minimum lighting and water service
D POLE	Average	27.25	Pole frame, metal siding, fully insulated, ventilated	Some paved alleyways, wainscot, dirt stalls, or pens	Adequate lighting and water service
	Low Cost	13.20	Pole frame, metal siding, some insulation, side curtains or vents	Unfinished, dirt floor	Minimum lighting and water service
D HOOP ARCH	Low Cost	9.37	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Some wainscot, dirt floor, calf pens	Minimum water service, feed, not automated
S	Average	30.00	Steel panels and frame, fully insulated, ventilated	Some paved alleyways, wainscot, dirt stalls, or pens	Adequate lighting and water service
	Low Cost	15.70	Steel siding and frame, some insulation, side curtains or vents	Unfinished, dirt floor	Minimum lighting and water service

For slotted floors, add the following per square foot of pit area:
Shallow pit, scraper alley: $10.15 to $20.10; Deep pit, tractor access: $24.00 to $34.00.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Stalls, each, free: $129 – $253; tie: $185 – $325; box: $2,360 – $3,325; calf pen, steel: $490 - $560; wire: $46.75 – $94

Feed racks, per linear foot: $25.50 – $34.75; steel feeders, each: paddock, $175 – $223; bale, $795 – $895; bunk, $705 – $795

Mechanical feeder, per linear foot, trough auger: $142 - $198; chain feeder: $129 – $246; overhead: $198 – $260

Water troughs, per linear foot, steel: $33.75 – $51.50; concrete: $50.00 – $73.50; drinking bowls, each: $175 – $182

Automatic waterers, each: $253 – $388

Barn cleaner, elevator and drive: $10,900 – $17,100 plus $65.50 per linear foot of gutter

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	**5,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
7,000	----	----	.835	854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	**7,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	**9,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
12,000	----	----	----	----	.833	.843	.855	.867	.888	.922	.934	.955	.977	1.000	**12,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
16,000	----	----	----	----	----	.827	.836	.844	.861	.877	.894	.911	.928	.945	**16,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

OCCUPANCY DESCRIPTION: Bank barns are two story multipurpose buildings that may include livestock stalls, hay/grain storage. Common flat roof types are gable and shed, which allow for additional loft areas. Higher quality barns include lighting, water service, and plank or concrete floor systems. Lower quality barns may have dirt floors on the lower level.

Barn loft costs include the floor structure and supports only; height adjustments must usually be made.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Barn loft floors, heating systems and feed and cleaning equipment are not included.

BARNS - BANK (TWO-STORY) - GENERAL PURPOSE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$38.50	Block or structural tile, some windows, good gable roof and trim	Concrete, good plank floors, stalls and feed room	Adequate lights and outlets, water service and drains
	Average	29.50	Brick, concrete block, structural clay tile, few windows, "flat roofed"	Some slab, wood floor, some partitions and stalls, feed room	Minimum electrical and water outlets
	Low Cost	22.55	Concrete block, structural clay tile, light shed or gable roof	Unfinished, dirt floor, upper-level wood floor, few stalls	None
D	Good	35.00	Lap siding, windows, good frame and gable roof structure	Some wainscot, good plank and concrete floors, stalls, feed room	Adequate lights and outlets, water service, drains
	Average	25.75	Wood frame, board and batten or low-cost siding, few windows	Some slab, wood floor, some partitions and stalls, feed room	Minimum electrical and water outlets
	Low Cost	19.10	Light wood frame and shed or gable roof structure, board siding	Unfinished, dirt floor, upper-level wood floor, few stalls	None
D POLE	Good	31.75	Pole frame, metal siding, insulated, good gable roof and trim	Concrete and plank floors, stalls, feed room, interior sheathing	Adequate lights and outlets, water service, drains
	Average	23.30	Pole frame, metal siding, few windows or shutters, "flat roofed"	Some slab, wood floor, some partitions and stalls, feed room	Minimum electrical and water outlets
	Low Cost	17.20	Pole frame, metal siding, light roof	Unfin., dirt, wood floors, few stalls	None

Stalls cost $ .98 to $5.91 with stall equipment (feed and water not automated) at $ .48 to $2.44 per square foot of equipped area. Add for barn cleaner at $6.67 to $9.37 per square foot of area service.

HAYLOFTS


CDS	Good	$18.70	Not included	Heavy timber, good T&G or plank	Not included
	Average	12.05	Not included	Adequate support, plank floor	Not included
	Low Cost	7.78	Not included	Minimum support, light floor	Not included

For wall height adjustment on buildings with high-pitched roofs, use the height from the floor to the eaves plus one-half the distance from the eaves to the ridge for the effective wall height with which to enter the story height multiplier table.

EXAMPLE:

Apply costs to total floor (both floors).

Apply loft costs to additional loft floor area.

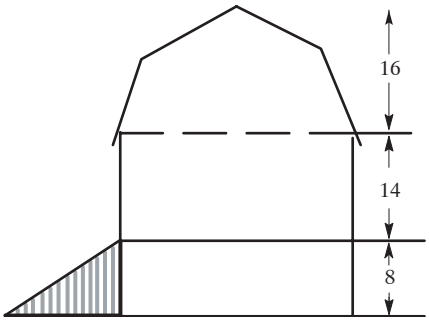

8' + 14' + (1/2 x 16') = 30' ÷ 2 stories = 15' EFFECTIVE WALL HEIGHT

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Stalls, each, free: $129 – $253; tie: $185 – $325; box: $2,360 – $3,325; calf pen, steel: $490 - $560; wire: $46.75 – $94

Feed racks, per linear foot: $25.50 – $34.75; steel feeders, each: paddock, $175 – $223; bale, $795 – $895; bunk, $705 – $795

Mechanical feeder, per linear foot, trough auger: $142 - $198; chain feeder: $129 – $246; overhead: $198 – $260

Water troughs, per linear foot, steel: $33.75 – $51.50; concrete: $50.00 – $73.50; drinking bowls, each: $175 – $182

Automatic waterers, each: $253 – $388

Barn cleaner, elevator and drive: $10,900 – $17,100 plus $65.50 per linear foot of gutter

Loft access ramps, each: $1,450 – $2,400

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	**5,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
7,000	----	----	.835	854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	**7,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	**9,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
12,000	----	----	----	----	.833	.843	.855	.867	.888	.922	.934	.955	.977	1.000	**12,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
16,000	----	----	----	----	----	.827	.836	.844	.861	.877	.894	.911	.928	.945	**16,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

OCCUPANCY DESCRIPTION: Special purpose dairy barn buildings that may include livestock stalls, hay/grain storage. Common roof types are gambrel and gothic, which allow for loft areas. Higher quality barns include lighting, plumbing, interior partitions, and milk processing and storage. Lower quality barns are older milking barns only.

Barn loft costs include the floor structure and supports only; height adjustments must usually be made.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Barn loft floors, heating systems and feed, milking and cleaning equipment are not included.

BARNS - SPECIAL PURPOSE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Excellent	$93.50	Decorative block, tile, arches, cupolas, gambrel roof, dormers	Plaster wainscot in cooler and washroom, good concrete floor	Good lighting and plumbing, hot water, milk piping
	Good	71.00	Brick or block, good fenestration, good gambrel roof and trim	Painted, concrete floor, good stalls and dairy facilities, storage	Good wiring, water and power outlets, restroom
	Average	54.00	Block or structural tile, some windows, arch or gambrel roof	Concrete floor, stalls and feed room, good milking	Lighting and power wiring, water service and drains
	Low Cost	41.25	Brick, concrete block, structural clay tile, good gable or light gambrel	Unfinished, some slab or wood floor, few stalls, feed room, milk barn only	Adequate electrical and water outlets
D	Excellent	89.50	Best sidings or veneer, good gambrel roof, arches, cupolas, dormers	Plaster wainscot in cooler and washroom, good concrete floor	Good lighting and plumbing, hot water, milk piping
	Good	66.00	Good siding or brick veneer, heavy frame and roof structure	T&G wainscot, concrete floor, good stalls and dairy facilities, storage	Good wiring, water and power outlets, restroom
	Average	49.00	Lap siding, windows, heavy frame and roof structure, gambrel roof	Some wainscot, plank or concrete floors, stalls, feed room, good milking	Lighting and power wiring, water service and drains
	Low Cost	36.25	Wood frame, board and batten or siding, few windows, gable roof	Some floor, few partitions and stalls, feed room, milking barn only	Adequate electrical and water outlets
D POLE	Average	43.00	Pole frame, metal siding, insulated, good arch or gambrel-style roof	Concrete or plank floors, stalls, feed room, interior sheathing	Lighting and power wiring, water service and drains
	Low Cost	31.50	Pole frame, metal siding, few windows or shutters, good gable roof	Some floor, few partitions and stalls, feed room, milking barn only	Adequate electrical and water outlets

HAYLOFTS


CDS	Good	$18.70	Not included	Heavy timber, good T&G or plank	Not included
	Average	12.05	Not included	Adequate support, plank floor	Not included
	Low Cost	7.78	Not included	Minimum support, light floor	Not included

For wall height adjustment on buildings with high-pitched roofs, use the height from the floor to the eaves plus one-half the distance from the eaves to the ridge for the effective wall height with which to enter the story height multiplier table.

EXAMPLE:

Apply costs to total floor (both floors).

Apply loft costs to additional loft floor area.



8' + 1/2 X 16' = 16' EFFECTIVE WALL HEIGHT

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Stalls, each, free: $129 – $253; tie: $185 – $325; box: $2,360 – $3,325; calf pen, steel: $490 - $560; wire: $46.75 – $94

Feed racks, per linear foot: $25.50 – $34.75; steel feeders, each: paddock, $175 – $223; bale, $795 – $895; bunk, $705 – $795

Mechanical feeder, per linear foot, trough auger: $142 - $198; chain feeder: $129 – $246; overhead: $198 – $260

Water troughs, per linear foot, steel: $33.75 – $51.50; concrete: $50.00 – $73.50; drinking bowls, each: $175 – $182

Barn cleaner, elevator and drive: $10,900 – $17,100 plus $65.50 per linear foot of gutter

Milking equipment: $8,600 – $24,100 base, plus $3,000 – $3,800 per stall, add for power gates, $1,550 – $1,850;
for feed system, add $1,120– $1,430, plus $1,120 for auger, per stall;
for computerized automation, add $2,525 – $5,050 plus $64– $87 for each I.D. tag

Bulk milk tanks, including refrigeration. For automatic wash system, add $3,775 to $5,050

Capacity, gal.	Cost	Capacity, gal.	Cost	Capacity, gal.	Cost
500	$20,300	1,500	$43,900	4,000	88,250
750	27,000	2,000	66,250	5,000	110,000
1,000	33,200	3,000	88,250	8,000	178,000

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	**5,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
7,000	----	----	.835	854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	**7,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	**9,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
12,000	----	----	----	----	.833	.843	.855	.867	.888	.922	.934	.955	.977	1.000	**12,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
16,000	----	----	----	----	----	.827	.836	.844	.861	.877	.894	.911	.928	.945	**16,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

OCCUPANCY DESCRIPTION: Bank barns are two story special purpose dairy barn buildings that may include livestock stalls, hay/grain storage. Common roof types are gambrel and gothic, which allow for additional loft areas. Higher quality barns include lighting, plumbing, interior partitions, and milk processing and storage. Lower quality barns are older milking barns only.

Barn loft costs include the floor structure and supports only; height adjustments must usually be made.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Barn loft floors, heating systems and feed, milking and cleaning equipment are not included.

BARNS - BANK (TWO-STORY) - SPECIAL PURPOSE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Excellent	$64.50	Decorative block, tile, arches, cupolas, gambrel roof, dormers	Plaster wainscot in cooler and wash-room, good concrete and plank floors	Good lighting and plumbing, hot water, milk piping
	Good	48.75	Brick or block, good fenestration, good gambrel roof and trim	Painted, concrete and plank floors, good stalls, dairy facilities, storage	Good wiring, water and power outlets, restroom
	Average	37.00	Block or structural tile, some windows, arch or gambrel roof	Concrete and wood floors, good stalls, feed room and milking	Lighting and power wiring, water service and drains
	Low Cost	28.25	Brick, concrete block, structural clay tile, good gable or light gambrel	Unfinished, some slab, wood upper floor, stalls, feed room, milking only	Adequate electrical and water outlets
D	Excellent	62.00	Best sidings or veneer, good gambrel roof, arches, cupolas, dormers	Plaster wainscot in cooler and wash-room, good concrete and plank floors	Good lighting and plumbing, hot water, milk piping
	Good	46.00	Good siding or brick veneer, heavy frame and roof structure	T&G wainscot, concrete and plank floors, good stalls, dairy facilities	Good wiring, water and power outlets, restroom
	Average	34.25	Lap siding, windows, heavy frame and roof structure, gambrel roof	Some wainscot, plank and concrete floors, good stalls, feed room	Lighting and power wiring, water service and drains
	Low Cost	25.50	Wood frame, board and batten or siding, few windows, gable roof	Some slab, wood upper floor, partitions, stalls, feed room, milking only	Adequate electrical and water outlets
D POLE	Average	31.00	Pole frame, metal siding, insulated, good arch or gambrel-style roof	Concrete and plank floors, good stalls, feed room, interior sheathing	Lighting and power wiring, water service and drains
	Low Cost	23.00	Pole frame, metal siding, few windows or shutters, good gable roof	Some slab, wood upper floor, partitions, stalls, feed room, milking only	Adequate electrical and water outlets

HAYLOFTS


CDS	Good	$18.70	Not included	Heavy timber, good T&G or plank	Not included
	Average	12.05	Not included	Adequate support, plank floor	Not included
	Low Cost	7.78	Not included	Minimum support, light floor	Not included

For wall height adjustment on buildings with high-pitched roofs, use the height from the floor to the eaves plus one-half the distance from the eaves to the ridge for the effective wall height with which to enter the story height multiplier table.

EXAMPLE:

Apply costs to total floor (both floors).

Apply loft costs to additional loft floor area.

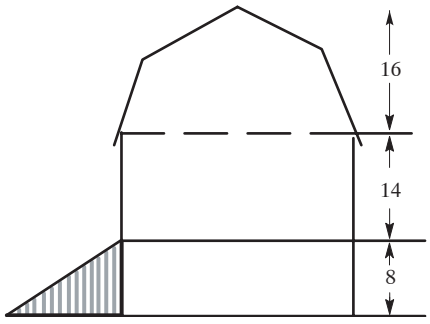

8' + 14' + (1/2 x 16') = 30' ÷ 2 stories = 15' EFFECTIVE WALL HEIGHT

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Stalls, each, free: $129 – $253; tie: $185 – $325; box: $2,360 – $3,325; calf pen, steel: $490 - $560; wire: $46.75 – $94
Feed racks, per linear foot: $25.50 – $34.75; steel feeders, each: paddock, $175 – $223; bale, $795 – $895; bunk, $705 – $795
Mechanical feeder, per linear foot, trough auger: $142 - $198; chain feeder: $129 – $246; overhead: $198 – $260
Water troughs, per linear foot, steel: $33.75 – $51.50; concrete: $50.00 – $73.50; drinking bowls, each: $175 – $182
Barn cleaner, elevator and drive: $10,900 – $17,100 plus $65.50 per linear foot of gutter
Milking equipment: $8,600 – $24,100 base, plus $3,000 – $3,800 per stall, add for power gates, $1,550 – $1,850;
for feed system, add $1,120– $1,430, plus $1,120 for auger, per stall;
for computerized automation, add $2,525 – $5,050 plus $64– $87 for each I.D. tag
Bulk milk tanks, including refrigeration. For automatic wash system, add $3,775 to $5,050

Capacity, gal.	Cost	Capacity, gal.	Cost	Capacity, gal.	Cost
500	$20,300	1,500	$43,900	4,000	88,250
750	27,000	2,000	66,250	5,000	110,000
1,000	33,200	3,000	88,250	8,000	178,000

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	**5,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
7,000	----	----	.835	854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	**7,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	**9,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
12,000	----	----	----	----	.833	.843	.855	.867	.888	.922	.934	.955	.977	1.000	**12,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
16,000	----	----	----	----	----	.827	.836	.844	.861	.877	.894	.911	.928	.945	**16,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

OCCUPANCY DESCRIPTION: Freestall barns are typically large, open structures providing free access to stalls and feed areas and include concrete alleyways and curbs in better qualities.

Commodity barns are designed with an open front and only three exterior walls with bay or partition walls. Floors are concrete. No electrical or plumbing is included.

Commodity and sun shelters are open (unwalled) structures for livestock shade or for the storage of hay or other farm commodities. The floor is dirt, and there is no electrical or water. Adjust shelters for height only.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Barn loft floors, heating systems and feed and cleaning equipment.

FREE-STALL BARNS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Excellent	$43.50	Good siding, heavy frame, ventilated walls and roof	All concrete alleys and floor, contoured, good metal freestalls	Good wiring, lights, water service, drains
	Good	31.75	Good panels, gable roof, insulated or sheathed	Half concrete and dirt, good curbs and stalls, wainscot	Good lighting and stall plumbing
	Average	23.25	Siding on wood frame, some wall curtains	Concrete alleys, curbs, dirt, metal freestalls	Adequate lights, outlets, water service
	Low Cost	17.00	Wood frame, board siding	Some paved alleyways, dirt stalls	Minimum electrical and water
D POLE	Excellent	38.75	Good siding, heavy frame, ventilated walls and roof	All concrete alleys and floor, contoured, good metal freestalls	Good wiring, lights, water service, drains
	Good	28.25	Good panels, gable roof, insulated or sheathed	Half concrete and dirt, good curbs and stalls, wainscot	Good lighting and stall plumbing
	Average	20.65	Metal siding on pole frame, some wall curtains	Concrete alleys, curbs, dirt, metal freestalls	Adequate lights, outlets, water service
	Low Cost	15.05	Metal pole on frame	Some paved alleyways, dirt stalls, metal freestalls	Minimum electrical and water
	Cheap	10.75	Metal roof on poles, no walls	Paved alleys, dirt stalls	Minimum electrical and water
D HOOP ARCH	Average	17.90	Greenhouse pipe frame, wire panels, wall curtains, shaded roof	Concrete alleys, curbs, dirt, metal freestalls	Minimum electrical, adequate water
	Low Cost	13.70	Wood post, knee wall, pipe hoop frame, fabric cover, side/end curtains	Concrete alleys, curbs, dirt, metal freestalls	Minimum electrical, adequate water
	Cheap	12.00	Wood post, pipe hoop, fabric cover, open side walls and ends	Minimum facility, some paved alleyways, dirt stalls, freestalls	Minimum electrical and water
S	Excellent	42.50	Good siding, heavy frame, ventilated walls and roof	All concrete alleys and floor, contoured, good metal freestalls	Good wiring, lights, water service, drains
	Good	31.75	Good panels, gable roof, insulated or sheathed	Half concrete and dirt, good curbs and stalls, wainscot	Good lighting and stall plumbing
	Average	23.65	Steel siding and frame, some wall curtains	Concrete alleys, curbs, dirt, metal freestalls	Adequate lights, outlets, water service
	Low Cost	17.65	Steel siding and frame	Some paved alleyways, dirt stalls	Minimum electrical and water
	Cheap	11.50	Steel roof, frame, no walls	Paved alleys, dirt stalls	Minimum electrical and water

For slotted floors, add the following per square foot of pit area:
Shallow pit, scraper alley: $10.15 to $20.10; Deep pit, tractor access: $24.00 to $34.00.

COMMODITY BARNS (STORAGE SHEDS)

C	Average	$24.50	Open one side, cheap block, shed roof	Unfinished, no doors, slab floor, masonry bay separation walls	None
D	Average	17.40	Open one side, plywood or siding on post frame	Unfinished, no doors, slab floor, concrete & upper frame bay walls	None
D POLE	Average	16.05	Open one side, metal on pole frame	Unfinished, no doors, slab floor, concrete & upper frame bay walls	None
S	Average	18.50	One one side, steel frame and siding	Unfinished, no doors, slab floor, concrete & upper frame bay walls	None

COMMODITY SHELTERS (HAY SHEDS)

D	Good	$6.59	-	$9.21	No walls, composition or steel gable roof on wood rafters and posts, dirt floor
	Average	5.14	-	7.17	No walls, steel shed or flat roof on wood posts and girders, dirt floor
S	Good	8.88	-	12.40	No walls, steel gable roof and truss on steel column, wide span, dirt floor
	Average	6.31	-	8.82	No walls, steel shed or flat roof and girders on good steel posts, dirt floor

For concrete slab, add silage floor from adjustments table.

FARM (SUN) SHELTERS

D	Average	$4.00	-	$5.60	No walls, light steel flat roof on light wood posts, dirt floor, sun shelters
	Low Cost	3.48	-	4.86	No walls, light steel flat roof on low-cost pipe, dirt floor, sun shelters
S	Average	4.50	-	6.28	No walls, light steel flat roof on light wood posts, dirt floor, sun shelters
	Low Cost	3.84	-	5.35	No walls, light steel flat roof on low-cost pipe, dirt floor, sun shelters

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Stalls, each, free: $129 – $253; tie: $185 – $325; box: $2,360 – $3,325; calf pen, steel: $490 - $560; wire: $46.75 – $94

Barn cleaner, each; flush tank, tip-type waterer, 70-gallon: $1030 – $1240; 105-gallon: $1,360 – $1,580

floor-type flooding flush system, excluding water source, cost per flush valve: $3,500 – $4,625

Fencing: 4” pipe, cable rails: $17.15 – $18.75 per linear foot;

4” pipe, 2” pipe rails: $21.50 – $23.40 per linear foot;

8’ gate, each: $198 – $282 (add $71.50 – $96.50 for each addition 4’)

Paved transfer lanes, 12’ wide: $32.00 – $37.25 per linear foot

add for 8” curbing, double-sided: $57.00 – $65.00 per linear foot

Feeding fence, tubular steel, $11.45 – $24.55, add $22.90 – $27.00 for locking or sloped guard rail, per linear foot

Feeding troughs, one sided (fence): wood: $20.60 – $31.50; steel; $40.25 – $51.50; concrete: $53.00 – $62.50 per linear foot

Silage concrete slabs, cost: $3.32 – $3.98 per square foot

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors’ overhead and profit and architects’ fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	**5,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
7,000	----	----	.835	854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	**7,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	**9,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
12,000	----	----	----	----	.833	.843	.855	.867	.888	.922	.934	.955	.977	1.000	**12,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
16,000	----	----	----	----	----	.827	.836	.844	.861	.877	.894	.911	.928	.945	**16,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MILKHOUSES AND MILKHOUSE SHEDS



GOOD CLASS D MILKING PARLOR



AVERAGE CLASS C
Milkhouse Attached to Barn

OCCUPANCY DESCRIPTION: Parlors/rooms used for milking operations, milk cooling and storage. Milk houses are used for cooling and storing milk on the farm. Parlors are attached to barns. Milk house structures are four-walled independent units. Lean-to additions are typically three-walled structures with shed roofs.*

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heat, milk parlor stall or storage equipment.

MILKING PARLORS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Excellent	$104.00	Brick or stucco on block, insulated heavy roof structure	Ceramic and epoxy finishes, contoured concrete floor, plaster ceiling	High-level lighting, hot water, cow wash, restrooms and showers
	Good	78.50	Brick, concrete block, insulated roof	Plaster walls in cooler/storage room, contoured concrete floor with drains	Good lighting and plumbing, pipe stanchions, milk piping
	Average	59.00	Brick, concrete block or clay tile, light wood trusses	Plaster wainscot in cooler and washroom, good concrete floor	Adequate lighting and plumbing, pipe stanchions
	Low Cost	44.75	Clay tile, concrete block, half walls, wood shutters and rafters	Painted walls, concrete milking floor, milking parlor only, no storage	Minimum electrical and plumbing service, wood stanchions
D	Excellent	97.50	Best sidings or veneer, good roof structure, fully insulated	Ceramic and epoxy finishes, contoured concrete floors, plaster ceiling	High-level lighting, hot water, cow wash, restrooms and showers
	Good	70.00	Good stucco or siding, some trim, wood or steel frame	Plaster walls, cooler and storage, contoured concrete floor	Good lighting and plumbing, pipe stanchions, milk piping
	Average	50.50	Stucco or siding, wood frame and rafters, windows or shutters	Plaster wainscot, cooler and washroom, good concrete floor	Adequate lighting and plumbing, pipe stanchions
	Low Cost	36.50	Wood siding or plywood on light wood frame, shutters	Some wainscot, concrete floor, milking barn only, no storage	Minimum electrical and plumbing services, wood stanchions
D POLE	Excellent	89.00	Best metal siding on pole frame, fully insulated, sheathed	Ceramic and epoxy finishes, contoured concrete floors, plaster ceiling	High-level lighting, hot water, cow wash, restrooms and showers
	Good	64.50	Pole frame, good metal siding and sheathing, insulated	Plaster or gypsum board, cooler and storage, contoured concrete floor	Good lighting and plumbing, pipe stanchions, milk piping
	Average	46.75	Pole frame, metal siding, windows or good shutters	Gypsum board or plaster, wainscot in cooler and washroom	Adequate lighting and plumbing, pipe stanchions
	Low Cost	34.00	Pole frame, metal siding, some wainscot, shutters	Little interior finish, concrete milking floor, milking barn only	Minimum electrical and plumbing services, wood stanchions
S	Excellent	97.00	Good steel siding and sheathing, fully insulated	Ceramic and epoxy finishes, contoured floors, plaster ceiling	High-level lighting, hot water, cow wash, restrooms and showers
	Good	71.00	Good steel siding, full sheathing, insulated	Plaster or gypsum board, cooler and storage, contoured concrete floor	Good lighting and plumbing, pipe stanchions, milk piping
	Average	52.00	Steel siding, windows or good shutters	Gypsum board or plaster, wainscot in cooler and washroom	Adequate lighting and plumbing, pipe stanchions
	Low Cost	38.25	Steel siding, light frame, some wainscot, shutters	Little interior finish, concrete milking floor, milking barn only	Minimum electrical and plumbing wood stanchions

MILKHOUSES

C	Good	$86.50	Decorative block	Plaster, ceramic and epoxy	Good electrical, restroom & shower
	Average	63.50	Concrete block or clay tile	Plaster wainscot, concrete floor	Adequate electrical and plumbing
D	Good	76.50	Good stucco or siding	Plaster, ceramic and epoxy	Good electrical, restroom & shower
	Average	56.00	Siding or metal on studs	Finished wainscot, concrete floor	Adequate electrical and plumbing

MILKHOUSE SHEDS

C	Good	$74.50	Decorative block, shed lean-to	Plaster, ceramic and epoxy	Good electrical, restroom & shower
	Average	54.50	Concrete block or clay tile, shed lean-to	Plaster wainscot, concrete floor	Adequate electrical and plumbing
D	Good	65.50	Good stucco or siding, shed lean-to	Plaster, ceramic and epoxy	Good electrical, restroom & shower
	Average	48.00	Siding or metal on studs, shed lean-to	Plaster wainscot, concrete floor	Adequate electrical and plumbing

*Costs for lean-to additions, per sq. ft. of ground area, are 80% to 90% of costs for similar four-wall structures.
NOTE: If these structures are totally within a barn, use 45% of the costs above.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MILKING PARLORS (DAIRIES), MILK HOUSES, AND MILK SHEDS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Concrete tanker loading pad: $3.82 - $4.30 per square foot

Fencing: 4" pipe, cable rails: $17.15 - $18.75 per linear foot; stock corrals, 4" pipe, 2" pipe rails: $21.50 - $23.40 per linear foot; galvanized rub panels, add $2.56 - $3.16 ; 8' gate, each: $198 - $282 (add $71.50 - $96.50 for each additional 4')

Holding pen/wash area, block wall, slab floor, pipe dividers, cost per square foot: $11.15 - $15.50 ; add for roof: $6.19 - $9.94; power crowd gate: $10.00 - $19.95; cow wash, $4.12 - $6.37

Milking equipment: $8,600 – $24,100 base, plus $3,000 – $3,800 per stall, add for power gates, $1,550 – $1,850; for fully automated systems, add, doubles, $8,600 - $24,100; rotary, $19,100 - $30,200 per stall; for feed system, add $1,120– $1,430, plus $1,120 for auger, per stall; for computerized automation, add $2,525 – $5,050 plus $64– $87 for each I.D. tag

Bulk milk tanks, including refrigeration. For automatic wash systems, add $2,625 to $3,500.

Capacity, gal.	Cost	Capacity, gal.	Cost	Capacity, gal.	Cost
500	$20,300	1,500	$43,900	4,000	88,250
750	27,000	2,000	66,250	5,000	110,000
1,000	33,200	3,000	88,250	8,000	178,000

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
200	1.444	1.794	2.110	2.460	2.776	2.909	----	----	----	----	----	----	----	----	**200**
300	1.222	1.444	1.667	1.911	2.110	2.510	----	----	----	----	----	----	----	----	**300**
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.044	1.1110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.885	.911	.938	.960	.991	**10,000**
12,000	----	----	----	----	----	----	.833	.843	.855	.867	.888	.911	.934	.955	**12,000**
14,000	----	----	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	**14,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEEP BARNS AND SHEDS

OCCUPANCY DESCRIPTION: Sheep barns and sheds are structures designed for the raising of sheep. Typically, there is minimal electrical and plumbing. The shed structures have dirt floors and half-walls or shed fronts. The full barn structure has a slab floor, insulated and vented walls and some interior partitions.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating or feeding systems.

SHEEP BARNS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Good	$42.25	Wood frame and siding, insulated, lambing barn	Insulated ceiling, interior sheathing, slab floor, division of space	Adequate electrical and water service
	Average	33.00	Wood frame and siding, insulated and vented walls	Insulated ceiling, interior sheathing, slab floor, some division of space	Adequate electrical and water service
D POLE	Good	36.75	Pole frame, metal siding, insulated, lambing barn	Insulated ceiling, interior sheathing, slab floor, division of space	Adequate electrical and water service
	Average	29.00	Pole frame, metal siding, insulated and vented walls	Insulated ceiling, interior sheathing, slab floor, some division of space	Adequate electrical and water service
S	Good	40.25	Steel frame and siding, insulated, lambing barn	Insulated ceiling, interior sheathing, slab floor, division of space	Adequate electrical and water service
	Average	32.50	Steel frame and siding, insulated and vented walls	Insulated ceiling, interior sheathing, slab floor, some division of space	Adequate electrical and water service

SHEEP SHEDS

D	Good	$22.80	Wood frame and siding, open front, rear vents	Ceiling insulation, some slab floor, subdivided	Adequate electrical, water, feed, not automated
	Average	18.20	Vertical boards or plywood, open front, back ventilation	Some wainscot, dirt floor, some division of space	Minimum water service, feed, not automated
	Low Cost	14.55	Plywood, open front, vents	Minimum facility, dirt floor	Hose bibs
	Cheap	13.05	Plywood or siding on box frame, half-walls	Unfinished, dirt floor	Feed and water, not automated
D POLE	Good	20.75	Pole frame, metal siding, open front, rear vents	Ceiling insulation, some slab floor, subdivided	Adequate electrical, water, feed, not automated
	Average	16.30	Pole frame, metal siding, open front, back ventilation	Some wainscot, dirt floor, some division of space	Minimum water service, feed, not automated
	Low Cost	12.80	Metal, open front, vents	Minimum facility, dirt floor	Hose bibs
	Cheap	11.20	Metal siding on pole frame, half-walls	Unfinished, dirt floor	Feed and water, not automated
D HOOP ARCH	Good	13.30	Wood post, knee wall, pipe hoop, fabric cover, curtain side and end doors	Some slab floor, subdivided	Minimum water service, feed, not automated
	Average	10.55	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Some wainscot, dirt floor, some division of space	Minimum water service, feed, not automated
	Low Cost	8.34	Wood, pipe hoop, fabric cover	Minimum facility, dirt floor	Hose bibs
S	Good	23.10	Steel siding and frame, open front, rear vents	Ceiling insulation, some slab floor, subdivided	Adequate electrical, water, feed, not automated
	Average	18.60	Steel panels and frame, open front, back ventilation	Some wainscot, dirt floor, some division of space	Minimum water service, feed, not automated
	Low Cost	15.00	Steel, open front, vents	Minimum facility, dirt floor	Hose bibs
	Cheap	13.65	Steel frame, metal siding, half-walls	Unfinished, dirt floor	Feed and water, not automated
S SLANT WALL	Average	17.30	Steel panels and slant frame, open front, back ventilation	Some wainscot, dirt floor, some division of space	Minimum water service, feed, not automated
	Low Cost	13.80	Light steel, open front, vents	Minimum facility, dirt floor	Hose bibs

NOTES: Use total length of walled sides, including vent doors and gates, as perimeter in the Floor Area/Perimeter table.

For slotted floors, add the following per square foot of pit area:

Shallow pit, scraper alley: $10.15 to $20.10; Deep pit, tractor access: $24.00 to $34.00.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEEP BARNS AND SHEDS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Confinement pens, solid rod, 27" - 46" high, $10.65 - $23.55 per linear foot;

add for galvanized panels, 42" high, $3.89 - $3.99 per linear foot

Sheep pens, 4" x 4" posts, four split rails, $10.15 - $10.50 ; four 2" x 6" rails, $14.50 - $15.30 per linear foot

Lambing pens, 4' x 6' w/18" safety zone, $434 - $565 each

Pen grain feeder, $87 - $175 each; Yard, round grain feeder, $975 - $1,010 each, hay feeder, $297 - $640 each

8" fenceline feeder, $650 - $665, add $473 - $487 for each additional 8'

Electric pen water, $129 - $246 each; Automatic drinker kit with float, $175 - $182

Watering tank, galvanized, 44 gallons, $121 - $129 each; 70 gallons, $175 - $182 each

Concrete exercise apron, $3.09 - $3.65 per square foot

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
7,000	----	----	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	**7,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS AND SHEDS

OCCUPANCY DESCRIPTION: Utility sheds are designed with an open front and only three exterior walls and may be of either wood frame or steel construction. The interior is usually unfinished, with no doors or partitioning and a dirt floor. No electrical or water service is included in the costs. They can be modified to be used for commodity or equipment storage only (no repair shop). Livestock loafing sheds include rub boards.

Feeder barns are designed for livestock shelter and feeding. They are open-front sheds with wood or metal siding attached to wood posts or steel frames. The low quality has an endwall door, while the good quality has doors at both ends and rear vents. Feeders and water are not automated.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating systems.

FARM UTILITY STORAGE SHEDS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Low Cost	$17.00	Open one side, cheap block, shed roof	Unfinished, no doors, dirt floor	None
D	Good	11.95	Open one side, boards/hvy. timber	Unfinished, no doors, dirt floor	None
	Average	10.70	Open one side, plywood/box frame	Unfinished, no doors, dirt floor	None
	Low Cost	9.58	Open one side, plywood/post frame	Unfinished, no doors, dirt floor	None
D POLE	Low Cost	8.00	Open one side, metal on pole frame	Unfinished, no doors, dirt floor	None
S	Low Cost	10.50	Open one side, steel frame/siding	Unfinished, no doors, dirt floor	None
S SLANT WALL	Low Cost	9.64	Open front, metal on light slant frame	Unfinished, no doors, dirt floor	None

For commodity (hay) storage, add silage floor from adjustments table.

LOAFING SHEDS

D	Good	$11.25	Open one side, plywood or boards on timber frame	Unfinished, no doors or vents, dirt floor, rub boards	None
	Average	10.50	Open one side, light plywood on box frame	Unfinished, no doors or vents, dirt floor, rub boards	None
	Low Cost	9.81	Open one side, light plywood on post frame	Unfinished, no doors or vents, dirt floor, rub boards	None
D POLE	Low Cost	8.23	Open one side, metal on pole frame	Unfinished, no doors or vents, dirt floor, rub boards	None
S	Low Cost	10.70	Open one side, steel frame and siding	Unfinished, no doors or vents, dirt floor, rub boards	None

Add for scraper alley, feed driveway paving, etc., from adjustments table.

FEEDER BARNS (CATTLE SHEDS)

D	Good	$12.85	Open one side, box frame and siding, good doors, rear vents	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Average	11.35	Open one side, boards or siding on wood frame, end doors	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Low Cost	10.00	Open one side, boards or siding, post/box frame, one end door	Unfinished, dirt floor	Feeders, not automated
D POLE	Good	10.90	Open one side, metal on pole frame, good doors, rear vents	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Average	9.60	Open one side, metal siding on pole frame, end doors	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Low Cost	8.42	Open one side, metal on pole frame, one end door	Unfinished, dirt floor	Feeders, not automated
D HOOP ARCH	Average	9.04	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Low Cost	7.94	Wood post, pipe hoop, partial fabric cover, open ends	Unfinished, dirt floor	Feeders, not automated
S	Good	13.80	Open one side, metal on steel frame, good doors, rear vents	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Average	12.25	Open one side, metal siding on steel frame, end doors	Unfinished, dirt floor, rub boards	Feeders, water troughs, not automated
	Low Cost	10.90	Open one side, metal on steel frame, one end door	Unfinished, dirt floor	Feeders, not automated

Add for scraper alley, feed driveway paving, etc., from adjustments table.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS AND SHEDS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

FOR DEVIATIONS FROM BASE COSTS	ADD OR DEDUCT PER SQUARE FOOT		
	LOW	AVG.	GOOD
Dirt Floor	$0.40	$0.45	$0.57
Gravel	0.77	0.91	1.26
Asphalt	2.89	3.66	5.86
Concrete Flatwork	4.17	5.01	7.24
Alleys with Curbs	7.07	7.82	9.55
Silage Floor or Driveways, Reinforced	4.75	5.77	8.52
Plank Floor	1.73	2.22	3.65
Feeders, Water Troughs			
Not Automated	0.30	0.38	0.60
Electric Service	0.26	0.44	1.28
Water Service	0.20	0.28	0.57

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
7,000	----	----	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	**7,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

BARNS AND SHEDS



GOOD CLASS D POLE FEEDER BARN



AVERAGE D POLE FEEDER BARN



AVERAGE D POLE FEEDER BARN



AVERAGE D POLE FEEDER BARN



LOW CLASS D POLE CATTLE SHED



AVERAGE CLASS D POLE CATTLE SHED



LOW CLASS D POLE STORAGE SHED



LOW CLASS D POLE LOAFING SHED

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG BARNS AND STABLES



GOOD CLASS D HOG HOUSE



GOOD CLASS D POLE FARROWING BARN



AVERAGE/GOOD CLASS S HOG HOUSE



AVERAGE CLASS S FARROWING BARN



GOOD CLASS D STABLE



GOOD CLASS D STABLE



AVERAGE CLASS D STABLE



LOW-COST CLASS D STABLE

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG HOUSES AND BARNS

OCCUPANCY DESCRIPTION: These barns provide for the breeding and nursery cycles of a swine production operation. Walls are insulated using plywood, wood or metal siding as the exterior cover. Some electrical and water to the pens is usually provided. Most have some type of flushing system. Higher quality (average to good) buildings are suitable for environmental control confinement housing.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Pens, crates, incubators, other special equipment or heat.

HOG HOUSE - NURSERY

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$70.00	Brick or block, good ventilation and fenestration	Insulated, slab floor, subdivided, office, nursery	Good lighting and plumbing, lab
	Average	62.50	Brick or block, insulated, ventilated	Insulated ceiling, slab floor, subdivided, small office, nursery	Adequate lighting and water service
D	Good	65.00	Wood siding or stucco, good ventilation and fenestration	Insulated, slab floor, subdivided,office, nursery	Good lighting and plumbing, lab
	Average	57.00	Wood siding or stucco, insulated, ventilated	Insulated ceiling, slab floor, subdivided, small office, nursery	Adequate lighting and water service
D POLE	Good	60.50	Pole frame, metal siding, fully insulated, ventilated	Insulated, interior sheathing, slab floor, subdivided, office, nursery	Good lighting and plumbing, lab
	Average	53.00	Pole frame, metal siding, insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided, small office	Adequate lighting and water service
S	Good	65.50	Steel panels and frame, fully insulated, ventilated	Insulated, interior sheathing, slab floor, subdivided, office, nursery	Good lighting and plumbing, lab
	Average	57.50	Steel panels and frame, insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided, small office	Adequate lighting and water service

HOG BARN - BREEDING/GESTATION

C	Good	$55.50	Brick or block, good ventilation and fenestration	Insulated, slab floor, subdivided	Good lighting and water service
	Average	44.25	Block or structural tile, adequate fenestration, ventilated	Insulated ceiling, slab, some division of space	Adequate lighting, water service
	Low Cost	38.50	Block or structural tile, side curtains or vents	Unfinished, slab floor, some division of space	Minimum lighting and water service
D	Good	49.25	Wood siding or stucco, good ventilation and fenestration	Insulated, slab floor, subdivided	Good lighting and water service
	Average	37.25	Stucco or wood siding, insulated, ventilated	Insulated ceiling, plywood interior, slab floor, some subdivision	Adequate lighting, water service
	Low Cost	32.00	Boards or plywood, on box frame, some insulation, curtains or vents	Some wainscot, slab floor, some division of space	Minimum lighting and water service
	Cheap	24.65	Low-cost boards, natural ventilation	Slab floor, some subdivision	Minimum services
D POLE	Good	46.25	Pole frame, metal siding, fully insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Good lighting and water service
	Average	35.50	Pole frame, metal siding, insulated, ventilated	Insulated ceiling, plywood interior, slab floor, some subdivision	Adequate lighting, water service
	Low Cost	30.50	Pole frame, metal siding, some insulation, side curtains or vents	Some wainscot, slab floor, some division of space	Minimum lighting and water service
	Cheap	23.85	Metal on pole, natural ventilation	Slab floor, some subdivision	Minimum services
S	Good	50.00	Steel panels and frame, fully insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Good lighting and water service
	Average	38.00	Steel siding and frame, insulated, ventilated	Insulated ceiling, plywood interior, slab, some division of space	Adequate lighting, water service
	Low Cost	32.50	Steel siding and frame, some insulation, side curtains or vents	Some wainscot, slab floor, some division of space	Minimum lighting and water service
	Cheap	25.25	Metal on steel, natural ventilation	Slab floor, some subdivision	Minimum services

For slotted floors, add the following per square foot of pit area:
Flush pit: $12.95 to $22.00 Shallow pit: $17.40 to $28.75 Deep pit: $27.75 to $41.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG HOUSES AND BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Confinement pens, solid rod, 27" - 46" high, $10.65 - $23.55 per linear foot; add for galvanized panels, 42" high, $3.89 - $3.99 per linear foot

PVC, 20" - 38" high, $7.96 - $16.50 per linear foot

Gestation stall, $147 - $159 each

Nursery feeder 1 bu. - 4.5 bushels, round, $487 - $770 each; rectangular, one sided, $276 - $685 each

rectangular, two sided, 3.5 bushels. - 9.35 bushels, $434 - $890 each

Nipple watering system, $114 - $223 per pen

Electric pen water, $129 - $246 each; Automatic drinker kit with float, $175 - $182 each

High pressure wash system, 2 GPM - 4 GPM, hot water, $3,675 - $5,900 plus $5.57 per linear foot

High pressure wash system, 2 GPM - 4 GPM, cold water, $1,450 - $2,140 plus $5.57 per linear foot

Heating pads, nursery, 2' X 3' - 3' X 6', $152- $381 each plus $630 - $810 for controller

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**
14,000	----	----	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	**14,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG HOUSES AND BARNS

OCCUPANCY DESCRIPTION: These barns provide for farrowing and finishing cycles of swine production. Walls are insulated using plywood, wood or metal siding as the exterior cover. Some electrical and water to the pens is usually provided. Most have some type of flushing system. Higher quality (average to good) buildings are suitable for environmental control confinement housing.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Pens, crates, incubators, other special equipment or heat.

HOG BARNS - FARROWING

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$62.50	Brick or block, good ventilation and fenestration	Insulated, slab floor, subdivided	Good lighting and water service
	Average	51.00	Brick or block, adequate fenestration, ventilated	Insulated ceiling, slab floor, subdivided	Adequate lighting, water service
	Low Cost	41.25	Block, side curtains or vents	Some insulation, slab, subdivided	Minimum services
D	Good	56.50	Wood siding or stucco, good ventilation and fenestration	Insulated, slab floor, subdivided	Good lighting and water service
	Average	44.25	Wood siding or stucco, adequate fenestration, ventilated	Insulated, slab floor, subdivided	Adequate lighting, water service
	Low Cost	34.25	Wood, side curtains or vents	Some insulation, slab, subdivided	Minimum services
D POLE	Good	53.00	Pole frame, metal siding, fully insulated and ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Good lighting and water service
	Average	41.75	Pole frame, metal siding, insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Adequate lighting, water service
	Low Cost	32.75	Metal, side curtains or vents	Some insulation, slab, subdivided	Minimum services
	Cheap	29.00	Metal on pole, natural ventilation	Slab floor, subdivided	Minimum services
S	Good	57.00	Steel panels and frame, fully insulated and ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Good lighting and water service
	Average	44.75	Steel panels and frame, insulated, ventilated	Insulated ceiling, interior sheathing, slab floor, subdivided	Adequate lighting, water service
	Low Cost	35.00	Steel, side curtains or vents	Some insulation, slab, subdivided	Minimum services
	Cheap	31.00	Metal on steel, natural ventilation	Slab floor, subdivided	Minimum services

HOG BARN - FINISHING

C	Average	$39.50	Block or structural tile, adequate fenestration, fully ventilated	Insulated ceiling, slab, some division of space	Adequate lighting, water service
	Low Cost	35.00	Block or structural tile, little fenestration, ventilated, side curtains or vents	Unfinished, partial floor, some division of space	Adequate lighting, water service
	Cheap	22.50	Cheap block, natural ventilation	Unfinished, dirt floor, no curtains	Minimum services
D	Average	32.75	Stucco or wood siding, insulated, fully ventilated	Insulated ceiling, plywood interior, slab floor, some subdivision	Adequate lighting, water service
	Low Cost	28.25	Boards or plywood on box frame, some insulation, side curtains/vents	Some wainscot, some slab floor, some division of space	Adequate lighting, water service
	Cheap	17.40	Low-cost boards, natural ventilation	Unfinished, dirt floor, no curtains	Minimum services
D POLE	Average	31.00	Pole frame, metal siding, insulated, fully ventilated	Insulated ceiling, plywood interior, slab floor, some subdivision	Adequate lighting, water service
	Low Cost	27.25	Pole frame, metal siding, some insulation, side curtains or vents	Some wainscot, partial floor, some division of space	Adequate lighting, water service
	Cheap	15.95	Metal on pole, natural ventilation	Unfinished, dirt floor, no curtains	Minimum services
S	Average	33.00	Steel siding and frame, insulated, fully ventilated	Insulated ceiling, plywood interior, slab floor, some subdivision	Adequate lighting, water service
	Low Cost	28.75	Steel siding and frame, some insulation, side curtains or vents	Some wainscot, slab floor, some division of space	Adequate lighting, water service
	Cheap	18.05	Metal on steel, natural ventilation	Unfinished, dirt floor, no curtains	Minimum services

For slotted floors, add the following per square foot of pit area:
Flush pit: $12.95 to $22.00 Shallow pit: $17.40 to $28.75 Deep pit: $27.75 to $41.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG HOUSES AND BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Confinement pens, solid rod, 27" - 46" high, $10.65 - $23.55 per linear foot; add for galvanized panels, 42" high, $3.89 - $3.99 per linear foot
PVC, 20" - 38" high, $7.96 - $16.50 per linear foot
Farrowing crate, finger, $404 - $630; riser, $253 - $457; complete package, $1,190 - $1,340 each
Partitions, 42" high, frame, $13.65 plus $10.25 for polylaminated finish; masonry, $33.25 per linear foot
Growing/finishing feeders, 4.5 bushels - 15.0 bushels, round, $875 - $1,190 each; rectangular, one sided, $540 - $1,410 each
rectangular, two sided, 4.5 bushels - 20.5 bushels, $755 - $2,460 each
Electric pen water, $129 - $246 each; Automatic drinker kit with float, $175 - $182 each
automatic waterer, $253 - $388; water fountain, $434 - $680 each, water fountain with heater, $810 - $1,250
High pressure wash system, 2 GPM - 4 GPM, hot water, $3,675 - $5,900 plus $5.57 per linear foot
High pressure wash system, 2 GPM - 4 GPM, cold water, $1,450 - $2,140 plus $5.57 per linear foot
Heating pads, nursery, 2' X 3' - 3' X 6', $152- $381 each plus $630 - $810 for controller

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**
14,000	----	----	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	**14,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG SHEDS

OCCUPANCY DESCRIPTION: These open and modified open-front sheds provide for raising and fattening swine. Walls are insulated using sidings as the exterior cover, with backwall vent doors and front hinged vent doors on the modified sheds. Some electrical and water to the pens is usually provided.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating and any special equipment.

MODIFIED HOG SHEDS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Average	$39.00	Block or concrete, insulated vent doors	Insulated ceiling, slab, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	34.50	Block or concrete, insulated, vent doors	Insulated ceiling, natural vent., slab floor, some division of space	Minimum lighting and water service
D	Average	32.00	Wood siding or stucco, insulated vent doors	Insulated ceiling, interior sheathing, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	27.75	Wood siding and frame, insulated, vent doors	Insulated ceiling, natural vent., slab floor, some division of space	Minimum lighting and water service
D POLE	Average	30.00	Pole frame, metal siding, insulated vent doors	Insulated ceiling, interior sheathing, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	26.75	Pole frame, metal siding, insulated, vent doors	Insulated ceiling, natural vent., slab floor, some division of space	Minimum lighting and water service
S	Average	32.50	Steel siding and frame, insulated vent doors	Insulated ceiling, plywood interior, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	28.50	Steel panels and frame, insulated, vent doors	Insulated ceiling, natural vent., slab floor, some division of space	Minimum lighting and water service

HOG SHEDS

D	Average	$25.50	Stucco or wood siding, open front, upper doors	Some ceiling insulation, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	21.85	Vertical boards or plywood, open front, back vents	Some wainscot, slab floor, some division of space	Water service
	Cheap	16.20	Plywood, open front, vents	Minimum facility, some flooring	Hose bibs
D POLE	Average	23.50	Pole frame, metal siding, open front, upper doors	Some ceiling insulation, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	20.20	Pole frame, metal siding, open front, back vents	Some wainscot, slab floor, some division of space	Water service
	Cheap	14.70	Metal, open front, vents	Minimum facility, some flooring	Hose bibs
D HOOP ARCH	Average	15.20	Wood post, knee wall, pipe hoop, fabric cover, end walls, curtains	Concrete slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	12.35	Wood post, knee wall, pipe hoop frame, fabric cover, end gates	Some wainscot, partial floor, some division of space	Minimum water service, feed, not automated
	Cheap	11.10	Wood, pipe hoop, fabric cover	Minimum facility, some flooring	Hose bibs
S	Average	25.75	Steel siding and frame, open front, upper doors	Some ceiling insulation, slab floor, subdivided	Adequate electrical, water, feed, not automated
	Low Cost	22.10	Steel panels and frame, open front, back vents	Some wainscot, slab floor, some division of space	Water service
	Cheap	16.50	Steel, open front, vents	Minimum facility, some flooring	Hose bibs
S SLANT WALL	Low Cost	20.65	Steel panels and slant frame, open front, back vents	Some wainscot, slab floor, some division of space	Water service
	Cheap	15.45	Light steel, open front, vents	Minimum facility, some flooring	Hose bibs

For slotted floors add the following per square foot of pit area:
Flush pit: $12.95 to $22.00 Shallow pit: $17.40 to $28.75 Deep pit: $27.75 to $41.00



LIVESTOCK SHELTERS

Individual shelters, hutches or small coops, for the segregation of breeding or young stock (with open front, stucco or wood siding, and composition roof), cost $1,550 to $2,775. Add $680 for concrete floor, $980 for front wall and fenestration. Add for water and electrical.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOG SHEDS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Confinement pens, solid rod, 27" - 46" high, $10.65 - $23.55 per linear foot;
add for galvanized panels, 42" high, $3.89 - $3.99 per linear foot
PVC, 20" - 38" high, $7.96 - $16.50 per linear foot
Partitions, 42" high, frame, $13.65 plus $10.25 for polylaminated finish; masonry, $33.25 per linear foot
Growing/finishing feeders, 4.5 bushels - 15.0 bushels, round, $875 - $1,190 each; rectangular, one sided, $540 - $1,410 each
rectangular, two sided, 4.5 bushels - 20.5 bushels, $755 - $2,460 each
Bulk feeders, 25 bu. - 85 bushels, round, $2,140 - $2,650; rectangular, two sided, $1,320 - $3,150
Mechanical feeder, per linear foot: trough auger: $142 - $198; chain feeder: $129 - $246; overhead: $198 - $260
Electric pen water, $129 - $246 each; Automatic drinker kit with float, $175 - $182 each
automatic waterer, $253 - $388; water fountain, $434 - $680 each, water fountain with heater, $810 - $1,250
Watering tanks, 300 gal. - 1,100 gal., $305 - $725; Water troughs, steel, $33.75 - $51.50; Concrete, $50.00 - $73.50 per linear foot
Concrete exercise apron, $3.09 - $3.65 per square foot

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Solar heat, active air	4.61
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**
14,000	----	----	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	**14,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STABLES AND CORRALS

OCCUPANCY DESCRIPTION: These are usually designed for the care and housing of horses. The better qualities are highly decorative and include stone, brick, brick veneer or wood as the exterior finish. Interiors have finished stalls, with restrooms, lounge and quality finishes throughout. Good lighting and water service are also included.

The lower qualities use block or low-cost wood finishes on the walls and low-cost roof systems. Floors may be finished only in feed and tack rooms, with the remaining floor being dirt. Stalls are not finished, and there is no lighting or plumbing. The best estate types are the custom luxury thoroughbred breeding facilities, where cost is not an issue.

Stable barn loft costs include the floor structure and supports only; height adjustments must usually be made.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. The size of the stables and the needs of the owners influence the facilities included in the stable. Commonly the following areas can be found: stalls or boxes, feed, tack, manure bunkers and lavatory accommodations. The better qualities may also include a sick box, washing and cleaning room, a sitting room/lounge for grooms and office facilities.

NOT INCLUDED IN COSTS: Heating and special equipment.

STABLES

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$68.00	Good brick or block, some windows and ornamentation	Fin. stalls, good floors, concrete in feed/tack room, good qual. throughout	Good lighting and water outlets, restroom
	Average	48.50	Block, very plain, doors on stalls	Plywood wainscot in stalls, floors in feed and tack rooms	Adequate lighting and water outlets
	Low Cost	34.50	Concrete block, open stalls	Rough stalls, dirt	None
D	Good	59.50	Brick veneer, best siding, some windows, ornamentation	T&G stalls, finished tack and feed rooms, floors	Good lighting and water outlets, restroom
	Average	38.50	Stucco or wood siding, little trim, good roofing	Wainscot in stalls, concrete floors in tack and feed rooms	Adequate lighting and water outlets
	Low Cost	24.90	Boards on post and beam	Unfinished, dirt floors, open stalls	None
D POLE	Good	55.50	Pole frame, good metal panels, finished inside, some trim	Finished stalls, good floors, good quality throughout	Good lighting and water outlets, restroom
	Average	35.75	Pole frame, metal siding, no trim, doors on stalls	Wood wainscot in stalls, floors in feed and tack rooms	Adequate lighting and water outlets
	Low Cost	23.20	Metal on poles, open stalls	Rough stalls, dirt floor	None
	Cheap	18.35	Metal or plywood on low-cost pole, shed or low gable	Rough stalls, dirt floor, no tackroom, minimum hobby stable	None
D HOOP ARCH	Average	12.80	Wood post, knee wall, pipe hoop frame, fabric cover, curtains	Rough stalls, dirt floor	Minimum electrical, adequate water
	Low Cost	8.69	Wood post, pipe hoop, fabric cover, open side walls and ends	Unfinished, dirt floors, open pipe stalls	None
S	Good	59.50	Good steel panels, finished inside, some trim	Finished stalls, good floors, good quality throughout	Good lighting and water outlets, restroom
	Average	38.75	Steel siding, no trim, doors on stalls	Plywood wainscot in stalls, floors in feed and tack rooms	Adequate lighting and water outlets
	Low Cost	25.25	Galvanized steel, open stalls	Rough stalls, dirt floor	None

HIGH-VALUE (ESTATE) STABLES

C	Excellent	$288.00	Face brick, cut stone, custom arches, cupolas, heavy roof, dormers	Custom stalls, imported woods, best broodmare or yearling barns	Extensive fixtures and custom hardware throughout
	Good	200.00	Face brick, stone trim, slate or tile gambrel roof, some custom sash	Fine custom stalls, finishes, best training or stallion barns	High-quality fixtures, fine hardware, horse baths
	Average	140.00	Good brick, stone trim, skylights, shakes or metal on good structure	Good finished stalls, good thoroughbred barn, some extras	Some special custom fixtures, electrical and plumbing
	Low Cost	97.50	Decorative block, small estate type, insulated, some distinctive trim	Finished stalls, lounge and restrooms, quality finishes	High-level electrical service, showers and dressing room
D	Excellent	285.00	Face brick or stone ven., heavy roof, custom dormers, arches, cupolas	Custom stalls, imported woods, best broodmare or yearling barns	Extensive fixtures and custom hardware throughout
	Good	196.00	Face brick veneer, stone trim, slate or tile on gambrel, some custom sash	Fine custom stalls, finishes, best training or stallion barns	High-quality fixtures, fine hardware, horse baths
	Average	135.00	Fine sidings, good veneer, skylights, good shakes or metal	Good finished stalls, good thoroughbred barn, some extras	Some special custom fixtures, electrical and plumbing
	Low Cost	93.00	Good sidings or masonry veneer, insulated, small estate type, good trim	Finished stalls, lounge and restrooms, good finishes	High-level electrical service, showers and dressing room
D POLE	Low Cost	86.50	Small estate type, insulated, some distinctive trim, complex roof	Finished stalls, lounge and restrooms, good finishes	High-level electrical service, showers and dressing room
S	Low Cost	93.00	Insulated, small estate type, some distinctive trim, complex roof	Finished stalls, lounge and restrooms, good finishes	High-level electrical service, showers and dressing room

STABLE HAYLOFTS

CDS	Good	$18.70	Not included	Heavy timber, good T&G or plank	Not included
	Average	12.05	Not included	Adequate support, plank floor	Not included
	Low Cost	7.78	Not included	Minimum support, light floor	Not included

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STABLES AND CORRALS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

	Cost per Lin. Ft. Except as Indicated		
Horse corrals, vinyl, 5” x 5” posts, three 2” x 6” rails	$21.50	–	$26.25
Horse corrals, 6” x 6” posts, concreted, five 2” x 6” rails, nailed, painted	22.70	–	23.90
Horse corrals, polymer grid, 5’ - 2” x 6” top rail	17.90	–	19.10
8’ gate, each (vinyl, add 100% - 150%)	223.00	–	358.00
Electrified fence strands, each strand (plus $328 per charger)	0.69	–	0.85
Horse walkers, two horses, $4,050 - $4,875 each; four horses, each	4875.00	–	6050.00
For six-horse walker each	6600.00	–	9900.00
Portable pipe corrals (plus $73.50 - $105 for 4’ gate, for larger gates, see below)	145.00	–	343.00
Stock corrals, 6” x 6” posts, four split rails, unfinished	12.90	–	13.55
Stock corrals, 6” x 6” posts, four 2” x 6” rails, nailed, unfinished	17.45	–	18.25
Finished, painted paddocks, add	2.86	–	4.05
Stock corrals, 4” pipe, cable rails	16.45	–	18.05
Stock corrals, 4” pipe, 2” pipe rails (galvanized rub panels, add $2.56 - $3.16)	21.00	–	23.00
8’ gate, each (add $73.50 - $105 for each additional 4’)	223.00	–	358.00

Feed racks: $25.50 - $34.75; steel feeders, each: bale, $260 - $570; bunk, $260 - $343; bunk w/ hayrack, $565 - $585 ; paddock, $175 - $223

Water troughs: steel, $33.75 - $51.50; concrete, $50.00 - $73.50; drinking bowls, each, $175 - $182

Watering tanks, galvanized, each: 175 gallons, $223 - $230; 300 gallons, $305 - $343; 500 gallons, $404 - $411

Automatic waterer, each: $253 - $388; feed lots, $810 - $1,450

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors’ overhead and profit and architects’ fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	**500**
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	**750**
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	**1,500**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	**2,500**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	**18,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ARENAS



GOOD CLASS S RIDING AREA



LOW CLASS D POLE EXERCISE AREA

OCCUPANCY DESCRIPTION: These buildings include a large, simple clear-span riding or exercise area with some stabling facilities, which may be in a lean-to extension. A good show, exhibit or auction/sale facility includes spectator viewing and lounge commensurate with the quality level.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating, seating, lockers or food preparation or training equipment.

ARENAS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Excellent	$86.00	Steel frame, good block or concrete panels, good entrance	Finished stalls, lounge, viewing area, quality finishes	High-level electrical service, good restrooms and kitchen
	Good	57.50	Steel or wood frame, block or tilt-up, small entrance	Fin. stalls, good floors in snack bar, feed/tack rm., good qual. throughout	Good lighting and water outlets, restrooms
	Average	38.25	Block or tilt-up, very plain, some interior finish	Unfinished arena area, floors in feed/tack and washrooms	Adequate lighting and water service
	Low Cost	25.50	Concrete block, some wainscot	Minimum facility, some flooring	Minimum services
D	Excellent	78.50	Glulam or steel frame, good veneer, siding, good entrance	Finished stalls, lounge, viewing area, quality finishes	High-level electrical service, good restrooms and kitchen
	Good	45.25	Good siding or stucco on wood or steel frame, small entrance	Fin. stalls, good floors in snack bar, feed/tack rm., good qual. throughout	Good lighting and water outlets, restrooms
	Average	26.25	Siding or stucco on wood frame, some interior finish	Unfinished arena area, floors in feed/tack and washrooms	Adequate lighting and water service
	Low Cost	15.10	Vertical boards or plywood on box frame, some wainscot	Dirt arena floor, some stalls, few finishes, some flooring	Minimum lighting and water service
D POLE	Good	40.50	Good metal panels, insulated pole frame, small entrance	Fin. stalls, good floors in snack bar, feed/tack rm., good qual. throughout	Good lighting and water outlets, restrooms
	Average	23.30	Good metal on pole frame, some interior finish	Unfinished arena area, floors in feed/tack and washrooms	Adequate lighting and water service
	Low Cost	13.40	Pole frame, metal siding,some wainscot	Dirt arena floor, some stalls, few finishes, some flooring	Minimum lighting and water service
	Cheap	12.15	Pole frame, metal siding	Unfinished, dirt floor, exer. only	Minimum electrical only
D HOOP ARCH	Cheap	10.40	Wood post, wide hoop frame, fabric cover, end walls, curtain doors	Unfinished, dirt floor, exercise arena, corral pipe fence	Minimum electrical only
S	Excellent	78.50	Steel frame, good enameled siding, masonry trim, good entrance	Finished stalls, lounge, viewing area, quality finishes	High-level electrical service, good restrooms and kitchen
	Good	46.25	Insulated sandwich panels, steel frame, small entrance	Fin. stalls, good floors in snack bar, feed/tack rm., good qual. throughout	Good lighting and water outlets, restrooms
	Average	27.25	Good metal panels and roof, some interior finish	Unfinished arena area, floors in feed/tack and washrooms	Adequate lighting and water service
	Low Cost	15.95	Steel siding, some wainscot	Minimum facility, some flooring	Minimum services
	Cheap	14.50	No walls, steel gable roof and truss on steel columns, wide span	Unfinished open arena, sand floor	Minimum electrical and water service

EQUESTRIAN LEAN-TOS

D	Average	$23.70	Side extension, board siding, windows and side doors	Stalls, tackroom, some flooring	Adequate lighting and water
	Low Cost	14.35	Side extension, board siding	Some stalls and flooring	Minimum services
	Cheap	8.71	Side extension, plywood/box frame	Unfinished, no doors, dirt floor	None
D POLE	Average	22.05	Side extension, good metal on pole frame, windows and side doors	Stalls, tackroom, some flooring	Adequate lighting and water
	Low Cost	13.00	Side extension, metal on pole frame	Some stalls and flooring	Minimum services
	Cheap	7.69	Side extension, metal on pole frame	Unfinished, no doors, dirt floor	None
S	Average	24.40	Steel siding, side doors, windows	Stalls, tackroom, some flooring	Adequate lighting and water
	Low Cost	15.00	Side extension, steel frame/siding	Some stalls and flooring	Minimum services
	Cheap	9.23	Side extension, steel frame/siding	Unfinished, no doors, dirt floor	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ARENAS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1

ADJUSTMENTS	Cost per Lin. Ft. Except as Indicated		
Stock corrals, 6" x 6" posts, four split rails, unfinished	$ 12.90	–	$ 13.55
Stock corrals, 6" x 6" posts, four 2" x 6" rails, nailed, unfinished	17.45	–	18.25
Stock corrals, 4" pipe, cable rails	16.45	–	18.05
Stock corrals, 4" pipe, 2" pipe rails (galvanized rub panels, add $2.56 - $3.16)	21.00	–	23.00
8' gate, each (add $73.50 - $105 for each additional 4')	223.00	–	358.00
Finished, painted paddocks, add	2.86	–	4.05
Portable pipe corrals (plus $76.50 - $105 for 4' gate, for larger gates, see above)	145.00	–	343.00
Portable 20' work alley: $2,390 - $3,975; curved, $2,800 - $4,375; tub, $2,900 - $3,300			
Cattle squeeze, each (portable, $4,375 - $4,625 plus $6,300 for scale)	1850.00	–	3475.00
Head gate each	555.00	–	1480.00
Crossing guard each	3125.00	–	6450.00
Loading chute, 6" x 6" supports and posts, 2" ramp, 12' - 15' long, each	1720.00	–	4950.00
Bleachers, portable, steel frame, metal, fiberglass or wood benches, erected			
Cost per seat: up to 800 seats, $26.25 - $103.00; over 800 seats, $24.60 - $93.00			
Bleachers, permanent, wood frame and benches			
Cost per seat: up to 1000 seats, $33.25 - $131.00			
Bleachers, grandstand, open steel frame, metal, fiberglass or wood benches, school or fairground type			
Cost per seat: up to 1000 seats, $52 - $324			

2

HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	**500**
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	**750**
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	**1,500**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	**18,000**
20,000	----	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**
25,000	----	----	----	----	----	----	.810	.815	.820	.831	.841	.852	.863	.873	.884	**25,000**

Use the total walled sides as the perimeter. Do not use table for structures without walls.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

POULTRY HOUSES

OCCUPANCY DESCRIPTION: These buildings are designed for the care and housing of caged poultry, e.g., commercial laying. The costs are for complete houses. The quality determination should be influenced by wall systems; closed-type, open screening, curtains, etc.; floor systems, e.g., slab, wood or dirt; the amount of interior finish, lighting and plumbing systems.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Racks, cages, feeders, egg gathering or other special equipment or heat.

ONE-STORY - CAGE OPERATION - ENCLOSED HOUSES*

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$51.00	Brick or block, heavy roof, well insulated, good fenestration	Paint and sealant, good plank or concrete slab with drains	Wiring in conduit, high-level lighting, water service
	Average	36.75	Concrete block, insulated roof, good fenestration and ventilation	Painted, concrete or wood floors, some partitions	Good lighting and outlets, water service
	Low Cost	26.75	Concrete block, adequate fenestration, clear-span roof, ventilated	Unfinished, low-cost concrete or wood floors	Adequate electrical service, water service
D	Good	43.75	Brick veneer or best stucco, good fenestration, insulation	Finished interior walls, good plank or concrete floor with drains	Wiring in conduit, high-level lighting, water service
	Average	30.50	Good siding and windows, insula - tion, good frame, vents and roof	Plywood ceilings, concrete floors, some partitions	Good lighting and outlets, water service
	Low Cost	21.50	Wood siding, adequate fenestration, insulated, ventilated	Unfinished, cheap slab or wood	Adequate services
D POLE	Good	40.50	Pole frame, metal siding, fully insulated-sheathed, good openings	Finished interior walls, good plank or concrete floor with drains	Wiring in conduit, high-level lighting, water service
	Average	28.00	Pole frame, metal sidings, insulated, adequate fenestration	Concrete floors, some partitions	Good lighting and water
	Low Cost	19.40	Metal siding on poles, some wainscot and insulation, ventilated	Unfinished, low-cost concrete or wood floors	Adequate electrical service, water service
	Cheap	15.90	Metal on poles, sidewall vents	Unfinished, cheap floor	Minimum service
S	Good	43.50	Best steel panels, insulated interior, sheathing, good fenestration	Finished interior walls, good plank or concrete floor with drains	Wiring in conduit, high-level lighting, water service
	Average	30.50	Steel siding, insulated, sheathing, adequate fenestration	Concrete floors, some partitions	Good lighting and water
	Low Cost	21.30	Steel siding and frame, some wainscot and insulation, ventilated	Unfinished, low-cost concrete or wood floors	Adequate electrical service, water service
	Cheap	17.85	Light frame, sidewall vents	Unfinished, cheap floor	Minimum service

ONE-STORY - CAGE OPERATION - SCREENED HOUSES*

D POLE	Average	$19.95	Heavy pole frame, curtain sidewalls	Concrete floors, some partitions	Good lighting and water
	Fair	18.30	Metal, insulated, sidewall open screen, full curtains	Unfinished, good floor, insulated ceiling	Adequate lighting and outlets,water service
	Low Cost	16.85	Metal, insulated, sidewall open screen, no curtains	Unfinished, pole frame, concrete or wood floor, insulated ceiling	Adequate electrical service, water service
	Cheap	11.05	Metal or lath partial walls or screen on light pole frame	Open ventilation, unfinished, cheap floor, no insulation	Minimum lighting and water
S	Average	21.90	Heavy steel frame, curtain sides	Concrete floors, some partitions	Good lighting and water
	Fair	20.25	Metal, insulated, sidewall open screen, full curtains	Unfinished, good floor, insulated ceiling	Adequate lighting and outlets,water service
	Low Cost	18.75	Metal, insulated, sidewall open screen, no curtains	Unfinished, pole frame, concrete or wood floor, insulated ceiling	Adequate electrical service, water service
	Cheap	11.80	Metal partial walls or screen on light steel frame	Open ventilation, unfinished, cheap floor, no insulation	Minimum lighting and water

*Costs are for one-story poultry houses. For two- or three-story buildings, use 75% of the base square foot cost for each additional story. For high-rise houses, where the house is elevated for cleaning purposes, add 20%. For stud-backed walls on Class DPOLE structures, add 5%.

EXAMPLE: Low-cost Class DPOLE, two-story curtain-screened cage house, 40' x 200' x 16' height.

Base Cost	=	$16.85	1st Floor Cost Factor:	.905 x $16.85	=$	15.25
Height Factor	=	.963	2nd Floor Cost Factor:	.75 x $15.25	=$	9.19
Size/Shape	=	.940	Total Cage House Cost:	8,000 x $15.25	=$	122,000
Combined Factors	=	.905		8,000 x $9.19	=$	73,520
			(15.25 + 9.19)/2 = $12.22	16,000 x $12.22	=$	195,520

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

POULTRY CAGE HOUSES

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

POULTRY EQUIPMENT SYSTEMS* (Costs Calculated at .48 Square Feet per Bird)	A-FRAME COST PER BIRD	BATTERY COST PER BIRD
A-frame layer cages with chain feeding system, 5-tier	10.10	-----
Battery layer cages with feeding system (cages with manure removal belts under every tier and direct-drive chain feeding systems), 8-tier	-----	19.60
Auger feeder bin and fill system (bulk feed bin which delivers feed to the feeders through an auger fill system)	0.45	0.36
Nipple watering system	1.09	0.79
Egg collection system (transports eggs from layer house to egg packing building)	0.33	0.19
Manure removal system (belt conveyor system located in the rear of the building transports the manure to a secondary conveyor, which transports the manure outside the building)	-----	0.19
House fan system (fans, shutters, and other miscellaneous equipment)	0.98	0.79
Evaporative cooling pad system (does not include framing materials or plumbing from water source to the cooling system)	0.34	0.32
Sidewall curtain and air inlet system	0.49	0.36

***Equipment costs can vary a plus or minus 25%, and density will vary significantly by type and size of operation, as well as by type of cage and building system, with a range from .37 to .87 square feet per bird.**

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	**500**
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	**750**
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	**1,500**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	**2,500**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	**18,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

POULTRY HOUSES

OCCUPANCY DESCRIPTION: These buildings are designed for the care and housing of poultry at ground level, with predominantly dirt floors. The costs are for complete houses. The quality determination should be influenced by roof systems; the amount and character of screening; floor systems, e.g., slab, wood or dirt; the amount of interior finish, lighting and plumbing systems.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Racks, cages, incubators, other special equipment or heat.

FLOOR OPERATION - BREEDER HOUSES

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$31.25	Brick or block, good ventilation and fenestration	Insulated ceiling, some slab and division of space	Adequate lighting and water service
	Average	24.20	Minimum block, shutters or vents, light roof structure, insulation	Unfinished, partial floor, some partitions, natural ventilation only	Minimum wiring and lighting, water service
D	Good	25.75	Wood siding or stucco, good ventilation and fenestration	Insulated ceiling, plywood interior, some slab floor and subdivision	Adequate lighting and water service
	Average	19.55	Light wood frame, wood siding, shutters or vents, insulated building	Unfinished, partial floor, some partitions, natural ventilation only	Minimum wiring and lighting, water service
D POLE	Good	20.90	Pole frame, metal siding, fully insulated, ventilated	Insulated ceiling, plywood interior, some slab floor and subdivision	Adequate lighting and water service
	Average	17.75	Metal siding on pole frame, shutters or vents, insulation	Unfinished, partial floor, some partitions, natural ventilation only	Minimum wiring and lighting, water service
	Fair	16.35	Metal, insulated, sidewall top open screen, side curtains	Unfinished, partial floor, few partitions, insulated ceiling	Minimum wiring and lighting, water service
	Low Cost	15.10	Metal, insulated, sidewall top open screen, no curtains	Unfinished, pole frame, partial floor, few partitions, insulated ceiling	Minimum services
	Cheap	10.10	Metal or plywood partial walls or screen on light pole frame	Open ventilation, unfinished, partial floor, no insulation, few partitions	Minimum lighting and hose bib
S	Good	22.65	Steel panels and frame, fully insulated, ventilated	Insulated ceiling, plywood interior, some slab and division of space	Adequate lighting and water service
	Average	19.60	Metal siding on steel frame, shutters or vents, insulation	Unfinished, partial floor, some partitions, natural ventilation only	Minimum wiring and lighting, water service
	Fair	18.25	Metal, insulated, sidewall top open screen, side curtains	Unfinished, partial floor, few partitions, insulated ceiling	Minimum wiring and lighting, water service
	Low Cost	17.00	Metal, insulated, sidewall top open screen, no curtains	Unfinished, partial floor, few partitions, insulated ceiling	Minimum services
	Cheap	10.80	Metal partial walls or screen on light steel frame	Open ventilation, unfinished, partial floor, no insulation, few partitions	Minimum lighting and hose bib

FLOOR OPERATION - BROILER HOUSE

D POLE	Good	$19.20	Pole frame, metal siding, fully insulated, ventilated	Insulated ceiling, interior sheathing, dirt floor, subdivided	Adequate lighting and water service
	Average	16.05	Pole frame, metal siding insulated, shutters or vents	Insulated ceiling, plywood interior, dirt floor, some subdivision	Adequate lighting and water service
	Fair	14.65	Metal, insulated, sidewall top open screen, curtain sidewalls	Unfinished, dirt floor, insulated ceiling	Minimum wiring and lighting, water service
	Low Cost	13.40	Metal, insulated, sidewall top open screen, no curtains	Unfinished, pole frame, dirt floor, insulated ceiling	Minimum services
	Cheap	8.44	Metal or plywood partial walls or screen on light pole frame	Open ventilation, unfinished, dirt floor, no insulation	Minimum lighting and hose bib
S	Good	20.95	Steel panels and frame, fully insulated, ventilated	Insulated ceiling, interior sheathing, dirt floor, subdivided	Adequate lighting and water service
	Average	17.85	Steel siding and frame, insulated, shutters or vents	Insulated ceiling, plywood interior, dirt, some division of space	Adequate lighting and water service
	Fair	16.50	Metal, insulated, sidewall top open screen, curtain sidewalls	Unfinished, dirt floor, insulated ceiling	Minimum wiring and lighting, water service
	Low Cost	15.25	Metal, insulated, sidewall top open screen, no curtains	Unfinished, steel frame, dirt floor, insulated ceiling	Minimum services
	Cheap	9.12	Metal partial walls or screen on light steel frame	Open ventilation, unfinished, dirt floor, no insulation	Minimum lighting and hose bib

For stud-backed walls on Class D POLE structures, add 5%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

POULTRY FLOOR HOUSES

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

POULTRY EQUIPMENT SYSTEMS*	BREEDER COST PER BIRD (1.90 Square Feet)	BROILER COST PER BIRD (.80 Square Feet)
Female, chain feeder system	$ 3.22	-----
Male, pan feeder system (with direct drive)	1.21	0.99
Nipple watering system	1.36	0.99
Female, bin, scale and fill system (daily feed bin with scale delivers feed to the feeder through an auger fill system)	1.34	-----
Male, bin and fill system (bulk feed bin which delivers feed to the feeders through an auger fill system)	0.53	-----
Nest and egg collection system	6.88	-----
Heating system (infrared brooders with wall heaters operating on propane gas)	-----	0.73
House fan system (fans, shutters and other miscellaneous equipment)	2.53	1.21
Evaporative cooling pad system (does not include framing materials or plumbing equipment from water source to the cooling system)	1.70	0.75
Sidewall curtain and air inlet system	2.31	1.02

Concrete floor costs $3.09 to $3.65 per square foot of paved area.

***Equipment costs can vary a plus or minus 25%, and bird density will vary significantly by type and size of operation, as well as by type of bird, with a range of .59 to 2.0 square feet per bird.**

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	**500**
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	**750**
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	**1,500**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	**2,500**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	**18,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TURKEY BARNS

OCCUPANCY DESCRIPTION: These buildings are designed for the care and housing of turkeys at ground level, with predominantly dirt floors. The costs are for complete houses. The quality determination should be influenced by roof systems; the amount and character of screening; floor systems, e.g. slab, wood or dirt; the amount of interior finish, lighting and plumbing systems.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Racks, cages, incubators, other special equipment, or heat.

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Average	$19.15	Siding, insulated, sidewall top open screen, curtains and shutters	Unfinished, partial floor, few partitions, insulated ceiling	Adequate wiring and lighting, water service
	Fair	17.45	Siding, insulated, sidewall open screen, side curtains	Unfinished, dirt floor, some concrete, insulated ceiling	Adequate services
	Low Cost	15.90	Plywood partial walls, side screen on wood studs, no curtains	Open ventilation, unfinished, dirt floor, no insulation	Minimum lighting and hose bib
D POLE	Average	17.10	Metal, insulated, sidewall top open screen, curtains and shutters	Unfinished, partial floor, few partitions, insulated ceiling	Adequate wiring and lighting, water service
	Fair	15.50	Metal, insulated, sidewall open screen, side curtains	Unfinished, pole frame, dirt floor, some concrete, insulated ceiling	Adequate services
	Low Cost	14.10	Metal partial walls, side screen on light pole frame, no curtains	Open ventilation, unfinished, dirt floor, no insulation	Minimum lighting and hose bib
D HOOP ARCH	Average	10.15	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Unfinished, dirt floor, some concrete	Minimum services
	Low Cost	8.05	Wood post, light pipe hoop, fabric cover	Open ventilation, unfinished, dirt floor, wire fence pens	Minimum lighting and hose bib
S	Average	19.00	Metal, insulated, sidewall top open screen, curtains and shutters	Unfinished, partial floor, few partitions, insulated ceiling	Adequate wiring and lighting, water service
	Fair	17.45	Metal, insulated, sidewall open screen, side curtains	Unfinished, steel frame, dirt floor, some concrete, insulated ceiling	Adequate services
	Low Cost	16.00	Metal partial walls, side screen on light steel frame, no curtains	Open ventilation, unfinished, dirt floor, no insulation	Minimum lighting and hose bib

For stud-backed walls on Class D POLE structures, add 5%.

FEED TANKS: Costs are averages of typical farm hoppers with roof, manhole and ladder, including necessary steel structural supports and concrete footings. Height is overall from ground level to top of tank. Capacity in tons is figured at 50 pounds per bushel. Costs do not include delivery auger.

DIAMETER (feet)	HEIGHT (feet)	CAPACITY (bushels)	CAPACITY (tons)	COST
6	10	120	3.0	2,600
6	16	240	6.0	3,675
6	21	360	9.0	4,175
6	25	480	12.0	4,700
6	28	600	15.0	5,200
9	14	300	7.5	5,350
9	17	458	11.5	6,400
9	20	594	14.8	7,000
9	25	866	21.8	8,050
9	28	1,000	25.0	8,500

DIAMETER (feet)	HEIGHT (feet)	CAPACITY (bushels)	CAPACITY (tons)	COST
9	31	1,130	28.3	8,800
12	20	870	21.8	12,000
12	25	1,345	33.8	13,600
12	31	1,825	45.8	15,500
12	36	2,300	57.5	16,700
12	42	2,780	69.5	18,200
15	33	4,030	100.75	21,300
15	41	5,220	130.5	25,200
18	34	5,980	149.5	30,100

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

TURKEY BARNS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1

ADJUSTMENTS TURKEY FINISHING EQUIPMENT SYSTEMS	COST PER SQUARE FOOT	COST PER BIRD
(Costs Calculated at 3 Square Feet per Bird)		
Pan feeder systems with direct drives	$0.94	$ 2.82
Auger feeder bin and fill system (bulk feed bin which delivers feed to the feeders through an auger fill system)	0.52	1.55
Nipple watering system	1.00	3.00
Heating system (jet brooders with wall heaters operating on propane gas)	0.59	1.77
House fan system (fans, shutters and other miscellaneous equipment)	1.33	3.99
Evaporative cooling pad system (does not include framing materials or plumbing equipment from water source to cooling system)	0.84	2.53
Sidewall curtain and air inlet system	1.21	3.64

2

HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	500
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	750
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	1,000
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	1,500
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	2,000
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	2,500
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	3,000
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	4,000
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	6,000
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	8,000
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	10,000
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	14,000
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	18,000
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	20,000

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM IMPLEMENT (EQUIPMENT SHOP) BUILDINGS



GOOD CLASS D



AVERAGE CLASS D



GOOD CLASS D ARCH RIB



AVERAGE D POLE



LOW-COST/AVERAGE D POLE



AVERAGE CLASS S SLANT WALL



GOOD CLASS S QUONSET



AVERAGE CLASS S



AVERAGE CLASS D IMPLEMENT SHED



LOW CLASS D POLE IMPLEMENT SHED

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORAGE BUILDINGS



AVERAGE CLASS D UTILITY
Arch Rib



LOW CLASS S UTILITY
Slant Wall



LOW CLASS D POLE UTILITY BUILDING



LOW CLASS S QUONSET UTILITY



GOOD CLASS S UTILITY
Grain Storage



GOOD CLASS S GREENHOUSE
Straight Wall



CLASS D TOOL SHED



CLASS D BULK FERTILIZER STORAGE

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM IMPLEMENT BUILDINGS

OCCUPANCY DESCRIPTION: Implement buildings are for storage and maintenance of farm equipment. These structures have lighter gauge materials or less interior finish than their commercial counterparts. They have better electrical circuits and built-in shop features not found in utility buildings or storage sheds. Walls are usually either block or some type of metal or wood over the frame. Roof systems are either steel or wood, and the floors are light concrete or asphalt. For arch-rib, use center arch height in entering the story height table.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating systems are not included.

FARM IMPLEMENT (EQUIPMENT SHOP) BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$40.25	Reinforced block, steel or wood truss, good roof cover	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	31.50	Block, steel or wood roof structure, good fenestration	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
D	Good	32.00	Wood frame and truss, wood siding or stucco	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	22.70	Open wood frame, exposed board siding, shingles, windows	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
D POLE	Good	28.75	Pole frame, best metal siding, sheathing	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	19.90	Pole frame, metal siding, good doors, windows	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	13.75	Pole frame, metal siding	Unfinished, light floor, few extras	Minimum services
S	Good	32.00	Steel frame and truss, steel or aluminum siding	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	22.75	Steel frame and siding, good doors, windows	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	16.20	Light steel frame, siding	Unfinished, light floor, few extras	Minimum services
S SLANT WALL	Good	30.00	Light steel slant frame and truss, steel siding	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	21.30	Light steel slant frame and siding, good doors, windows	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	15.15	Light steel slant frame and siding	Unfinished, light floor, few extras	Minimum services

ARCH-RIB (QUONSET) FARM IMPLEMENT BUILDINGS

D	Good	$37.75	Good laminated arch, siding, shingles, pedestrian and overhead doors	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	28.50	Arched frame, shingles and siding, windows, overhead door	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	21.75	Light arch-rib, frame, comp. shingles, end-wall sliding-door entry	Unfinished, light floor, few extras	Minimum services
D POLE	Good	36.00	Good laminated arch, metal siding, pedestrian and overhead doors	Unfinished, concrete floor, tool cabinets, shop area	Good lighting and outlets, water service
	Average	27.00	Pre-engineered arched frame, metal siding, windows, overhead door	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	20.25	Light arch-rib frame, metal siding, end-wall sliding-door entry	Unfinished, light floor, few extras	Minimum services
D HOOP ARCH	Average	17.75	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	13.50	Wood post, pipe hoop, fabric cover	Unfinished, light floor, few extras	Minimum services
S	Good	36.50	Good self-framing quonset panels, pedestrian and overhead doors	Unfinished, concrete or asphalt floor, some cabinets	Good lighting and outlets, water service
	Average	27.50	Pre-engineered quonset, metal siding, windows, overhead door	Unfinished, concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	20.85	Light self-framing quonset panels, end-wall sliding-door entry	Unfinished, light floor, few extras	Minimum services
	Cheap	16.95	Light self-framing quonset panels, open ends	Unfinished, light floor	Minimum services

FARM IMPLEMENT (EQUIPMENT) SHELTERS

D	Good	$15.35	-	$21.45	No walls, composition or steel gable roof on wood rafters and posts, concrete floor, security lighting
	Average	10.90	-	15.25	No walls, steel shed or flat roof on wood posts and girders, light slab floor, minimum electrical
	Low Cost	7.73	-	10.80	No walls, light steel flat roof on light wood posts, asphalt floor, no electrical
S	Very Good	19.55	-	27.25	No walls, large bulk commodity canopy structure, heavy frame and floor, good electrical
	Good	16.50	-	23.05	No walls, steel gable roof and truss on steel column, wide span, concrete floor, security lighting
	Average	11.70	-	16.30	No walls, heavy fabric or steel shed or flat roof and girders on good steel posts, light slab floor, minimum electrical
	Low Cost	8.29	-	11.55	No walls, light steel, fiberglass or shade netting, flat roof on low-cost pipe, asphalt floor, no electrical

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM IMPLEMENT BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

FOR DEVIATIONS FROM BASE COSTS	ADD OR DEDUCT PER SQUARE FOOT		
	LOW	AVG.	GOOD
Dirt Floor	$ 0.40	$ 0.45	$ 0.57
Gravel	0.77	0.91	1.26
Asphalt	2.89	3.66	5.86
Concrete Floor, Plain	4.17	5.01	7.24
Reinforced	4.75	5.77	8.52
Plank Floor	1.73	2.22	3.65
Electric Service	0.26	0.44	1.28
Water Service	0.20	0.28	0.57

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	**500**
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	**750**
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	**1,000**
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	**1,500**
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	**2,000**
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	**2,500**
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	**3,000**
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	**4,000**
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	**6,000**
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	**8,000**
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	**10,000**
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	**14,000**
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	**18,000**
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	**20,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND UTILITY BUILDINGS

OCCUPANCY DESCRIPTION: Equipment shed buildings are for storage and maintenance of farm equipment. These structures are typically designed with an open front and only three exterior walls of either wood frame or steel construction. Floors are either light concrete, asphalt, gravel or dirt. Electrical and water service are commensurate with the quality.

Quonset shape farm utility buildings have many uses, such as general material, commodity or equipment storage. Interior modifications can make them accommodate any one of several uses. Frames are light arch-rib wood with metal (Class DPOLE), wood siding or shingles (Class D) or self-framing metal quonset panels (Class S). The floors are light concrete, asphalt or dirt at the lower qualities. Use the center arch height in entering the story height table.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: No heat or special equipment.

FARM IMPLEMENT/EQUIPMENT SHEDS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Average	$25.75	Open one side, block light roof, some end-wall fenestration	Unfinished, light concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	18.70	Open front, cheap block, shed roof	Unfinished, gravel floor, few extras	Minimum services
D	Average	19.55	Open one side, wood frame, siding, some end-wall fenestration	Unfinished, light concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	11.25	Open front, box frame, siding	Unfinished, gravel floor, few extras	Minimum services
D POLE	Average	16.65	Open one side, metal on pole frame, some end-wall windows	Unfinished, light concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	9.54	Open front, metal on pole frame	Unfinished, gravel floor, few extras	Minimum services
S	Average	19.60	Open one side, metal on steel frame, some end-wall windows	Unfinished, light concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	12.10	Open front, metal on steel frame	Unfinished, gravel floor, few extras	Minimum services
S SLANT WALL	Average	18.20	Open one side, metal on steel slant frame, some light panels	Unfinished, light concrete or asphalt floor, some cabinets	Adequate water, electrical service and outlets
	Low Cost	11.10	Open front, metal on light slant frame	Unfinished, gravel floor, few extras	Minimum services

ARCH-RIB (QUONSET) FARM UTILITY BUILDINGS

D	Good	$36.25	Good laminated arch, siding, shingles, pedestrian and overhead doors	Unfinished, good concrete slab	Adequate wiring, lighting and water service
	Average	21.30	Arched frame, shingles and siding, end wall sliding-door entry	Unfinished, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	12.55	Arch-rib frame, siding, composition shingles, open ends	Unfinished, dirt floor	Minimum electric service
D POLE	Good	34.50	Good laminated arch, metal siding, pedestrian and overhead doors	Unfinished, good concrete slab	Adequate wiring, lighting and water service
	Average	20.00	Pre-engineered arched frame, metal siding, end-wall sliding door entry	Unfinished, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	11.60	Light arch-rib frame, metal siding, open ends	Unfinished, dirt floor	Minimum electric service
D HOOP ARCH	Average	14.10	Wood post, knee wall, pipe hoop frame, fabric cover, end curtains	Unfinished, cheap asphalt or slab floor	Adequate wiring, lighting and water service
	Low Cost	8.81	Wood, pipe hoop, fabric cover	Unfinished, dirt floor	Minimum electric service
S	Good	35.00	Good self-framing quonset panels, pedestrian and overhead doors	Unfinished, good concrete slab	Adequate wiring, lighting and water service
	Average	20.45	Pre-engineered quonset, metal siding, end-wall sliding-door entry	Unfinished, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	12.00	Light self-framing quonset panels, open ends	Unfinished, dirt floor	Minimum electric service

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND UTILITY BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

FOR DEVIATIONS FROM BASE COSTS	ADD OR DEDUCT PER SQUARE FOOT		
	LOW	AVG.	GOOD
Dirt Floor	$ 0.40	$ 0.45	$ 0.57
Gravel	0.77	0.91	1.26
Asphalt	2.89	3.66	5.86
Concrete Floor, Plain	4.17	5.01	7.24
Reinforced	4.75	5.77	8.52
Plank Floor	1.73	2.22	3.65
Electric Service	0.26	0.44	1.28
Utility Buildings	0.24	0.35	0.77
Water Service	0.20	0.28	0.57

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	75	125	150	200	250	300	350	400	500	600	700	800	900	1000	
500	1.178	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	----	----	500
750	1.044	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	----	----	750
1,000	.980	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	1,000
1,500	.911	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	----	----	1,500
2,000	.878	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	2,000
2,500	.858	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	----	----	2,500
3,000	.843	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	3,000
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	4,000
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	6,000
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	8,000
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	10,000
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	14,000
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	18,000
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	20,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM UTILITY BUILDINGS

OCCUPANCY DESCRIPTION: Utility buildings have many uses, such as general material, commodity or equipment storage. Interior modifications can make them accommodate any of several uses. Floors are light concrete, asphalt or dirt at the lower qualities.

Lean-tos are side extensions used in conjunction with utility buildings. The lowest cost, cheap lean-tos are totally unfinished, with dirt floors, while the low-cost quality includes some openings.

Tool sheds are small multipurpose auxiliary type structures which may be used for the storage of small hand tools, feed supplies or wood, or as pump houses, etc. Better qualities have a slab, while the lower qualities have dirt floors with no electrical or plumbing.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating systems.

FARM UTILITY BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$38.75	Brick, concrete block, clay tile, wood rafters, windows	Unfinished walls, slab or plank floor	Adequate wiring and outlets, water service
	Average	28.00	Block, cheap brick, light roof	Cheap slab or asphalt	Minimum electric service
D	Average	19.35	Wood frame, siding or stucco, windows	Unfinished walls, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	12.45	Wood frame, board siding on exposed studs, sliding door	Unfinished, dirt floor	Minimum electric service
D POLE	Average	15.65	Pole frame, metal siding, windows, walkdoor	Unfinished walls, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	9.16	Light pole frame, metal siding, sliding door entry only	Unfinished, dirt floor	Minimum electric service
S	Average	18.85	Steel frame and truss, metal siding, windows, walkdoor	Unfinished walls, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	11.75	Light steel frame, metal siding, sliding-door entry only	Unfinished, dirt floor	Minimum electric service
S SLANT WALL	Average	17.45	Light steel slant frame and metal siding, windows, walkdoor	Unfinished walls, cheap asphalt or slab floor	Adequate wiring and outlets, water service
	Low Cost	10.80	Light steel slant frame and siding, sliding-door entry only	Unfinished, dirt floor	Minimum electric service

UTILITY LEAN-TOS

D	Good	$17.55	Side extension, wood frame, siding or stucco, windows, walkdoor	Unfinished, good concrete slab	Adequate wiring and outlets, water service
	Average	12.30	Side extension, board siding on exposed studs, sliding door	Unfinished, cheap asphalt or slab floor	Minimum electric service
	Low Cost	8.68	Side extension, plywood/box frame	Unfinished, no doors, dirt floor	None
D POLE	Good	15.40	Side extension, pole frame, metal siding, windows, walkdoor	Unfinished, good concrete slab	Adequate wiring and outlets, water service
	Average	10.85	Side extension, light frame, metal siding, sliding-door entry only	Unfinished, cheap asphalt or slab floor	Minimum electric service
	Low Cost	7.67	Side extension, metal on pole frame	Unfinished, no doors, dirt floor	None
S	Good	17.10	Side extension, steel frame, metal siding, windows, walkdoor	Unfinished, good concrete slab	Adequate wiring and outlets, water service
	Average	12.50	Side extension, light frame, metal siding, sliding-door entry only	Unfinished, cheap asphalt or slab floor	Minimum electric service
	Low Cost	9.20	Side extension, steel frame/siding	Unfinished, no doors, dirt floor	None

TOOLSHED BUILDINGS

C	Good	$35.75	Cheap block, windows, hip or gable roof	Unfinished, good slab	One or two lights and outlets, no plumbing
D	Good	29.75	Good siding and windows, hip or gable roof	Some wainscot, good concrete slab	One or two lights and outlets, no plumbing
	Average	18.25	Board or metal on exposed studs, windows, gable roof	Unfinished interior, light slab or board floor	None
	Low Cost	11.25	Low-cost board siding or box frame, few openings	Unfinished interior, dirt floor	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM UTILITY BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

FOR DEVIATIONS FROM BASE COSTS	ADD OR DEDUCT PER SQUARE FOOT		
	GOOD	AVG.	LOW
Dirt Floor	$ 0.40	$ 0.45	$ 0.57
Gravel	0.77	0.91	1.26
Asphalt	2.89	3.66	5.86
Concrete Floor, Plain	4.17	5.01	7.24
Reinforced	4.75	5.77	8.52
Plank Floor	1.73	2.22	3.65
Electric Service	0.26	0.44	1.28
Utility Buildings	0.24	0.35	0.77
Water Service	0.20	0.28	0.57

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
7,000	----	----	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	**7,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM STORAGE BUILDINGS



CLASS D CORN CRIB
Wood-covered Exterior

OCCUPANCY DESCRIPTION: Utility building modified for grain storage.

Corn cribs are for the dry storage of corn on the cob; both wire and wood cribs are priced. Corn cribs are modified for height and perimeter just as other structures are.



CLASS D CORN CRIB
Wire-mesh-covered Exterior

Fertilizer storage buildings provide for the blending and distribution of dry fertilizers in bulk or bag.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating and special storage and handling equipment are not included.

FARM UTILITY/GRAIN STORAGE BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Very Good	$32.75	Dropsiding on wood frame, sliding doors, asphalt shingles	Good slab, interior wood cribbing, good granary	Adequate wiring and lighting
	Good	30.25	Heavy wood frame, siding or stucco, bulkheads	Finished walls, good slab, grain or feed storage	Adequate wiring and lighting
D POLE	Very Good	29.25	Pole frame, metal siding	Good slab, interior wood cribbing	Adequate wiring and lighting
	Good	27.00	Pole frame and truss metal siding, sheathing and bulkheads	Lined walls, good slab, grain storage	Adequate wiring and lighting
D HOOP ARCH	Good	22.60	Wood post, bulkhead, pipe hoop, fabric cover, end walls, curtain doors	Good concrete slab, grain storage	Adequate wiring and lighting
S	Good	30.50	Steel frame and truss, heavy steel panels, bulkheads	Good concrete slab, grain storage	Adequate wiring and lighting
S SLANT WALL	Good	28.25	Light steel slant frame, heavy steel panels	Good concrete slab, grain storage	Adequate wiring and lighting

For quonset storage, see Page 263.

CORN CRIB BUILDINGS

D	Good	$25.75	Wood skeleton frame, spaced boards, gable roof	Concrete slab or wood plank, drive-through alley	Minimum lighting
	Average	24.10	Wood skeleton, spaced boards	Concrete slab or wood plank	None
	Loft	8.41	Not included	Plank storage bin, adequate support	Not included
	Good	23.60	Wood skeleton frame, wire mesh, gable roof	Concrete slab or wood plank, drive-through alley	Minimum lighting
	Average	22.00	Wood skeleton, wire mesh	Concrete slab or wood plank	None
	Loft	6.89	Not included	Wire storage bin, adequate support	Not included

BAG FERTILIZER STORAGE

D	Average	$49.25	Heavy wood frame, composition roof, wood siding and skirting	Concrete or built-up wood dock height floor, sealed, few partitions	Rigid conduit, sparkproof fixtures, no plumbing
D POLE	Average	47.00	Metal siding on poles, sheathing,metal skirting	Concrete or built-up wood dock height floor, sealed, few partitions	Rigid conduit, sparkproof fixtures, no plumbing
S	Average	48.75	Pre-engineered frame, siding and sheathing, steel skirting	Concrete or built-up wood dock height floor, sealed, few partitions	Rigid conduit, sparkproof fixtures, no plumbing

Loading platforms cost $23.55 to $26.00 per square foot; add $520 for steps.

BULK FERTILIZER STORAGE

C	Average	$62.00	Wall-bearing block or concrete, wood trusses, driveway	Heavy bins, concrete slab, small finished office, blend area	Rigid conduit, sparkproof fixtures, some plumbing
D	Average	57.50	Heavy wood frame, roof, wood siding, driveway	Heavy bins, concrete slab, small finished office, blend area	Rigid conduit, sparkproof fixtures, some plumbing
D POLE	Average	54.00	Metal siding on poles, wood sheathing, driveway	Heavy bins, concrete slab, small finished office, blend area	Rigid conduit, sparkproof fixtures, some plumbing
S	Average	57.50	Steel frame, siding and sheathing, driveway	Heavy bins, concrete slab, small finished office, blend area	Rigid conduit, sparkproof fixtures, some plumbing

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM STORAGE BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Pole frame, rough wood floor, wrapped with cheap fencing materials or wire mesh: $22.00 – $23.60 per sq. ft. of ground area

For metal roof, add $2.31 – $5.51 per sq. ft. of roof. Corn crib with spaced boards $24.10 - $25.75.





EXCLUSIVELY OWNER-BUILT CORN CRIBS

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
7,000	----	----	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	**7,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GREENHOUSES

OCCUPANCY DESCRIPTION: Enclosures used to regulate the climatic conditions for germinating and growing various plants and vegetables.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heating or automated watering systems, shade curtains and planting benches.

STRAIGHT-WALL STRUCTURES

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Average	$14.65	Wood frame, glass or fiberglass covering, some vents	Gravel, some concrete	Adequate electrical and hose bibs
	Fair	9.53	Wood frame, fiberglass walls, double polyethylene roof cover	Gravel floor	Minimum electrical, lighting and water
	Low Cost	6.21	Post frame, fiberglass end walls, double polyethylene cover	Dirt floor	Minimum equipment outlet and hose bibs
	Cheap	5.51	Light post frame, wide spacing, polyethylene cover	Dirt floor	No electrical, hose bib only
S	Excellent	46.00	Best frame, translucent sandwich panels and venting	Concrete floor, drains	Good lighting and plumbing
	Very Good	38.00	Heavy frame, good sandwich panels, good wall and roof vents	Good concrete walks	Adequate electrical, good fixtures and water service
	Good	31.25	Good metal frame, tempered glass, polycarbonate or acrylic, good vents	Concrete walks	Adequate electrical and water service
	Average	14.60	Metal frame, glass or fiberglass covering, some vents	Gravel, some concrete	Adequate electrical and hose bibs
	Fair	9.93	Metal frame, double polyethylene arch roof, fiberglass walls	Gravel floor	Minimum electrical, lighting and water
	Low Cost	6.77	Metal frame, fiberglass end walls, double polyethylene cover	Dirt floor	Minimum equipment outlet and hose bib
	Cheap	6.02	Light pipe arch, wide spacing, polyethylene cover	Dirt floor	No electrical, hose bib only

HOOP (ARCH-RIB/QUONSET) STRUCTURES

D	Low Cost	$5.79	Light built-up wood arch, fiberglass ends, double polyethylene cover	Dirt floor	Minimum equipment outlet and hose bibs
S	Very Good	26.75	Good translucent sandwich panels, heavy frame, pitched peak, vents	Good concrete walks	Adequate electrical, good fixtures and water service
	Good	21.95	Good polycarbonate or acrylic cover, roof and wall vents	Concrete walks	Adequate electrical and water service
	Average	10.35	Fiberglass panels on light arch frame, some vents	Gravel, some concrete	Adequate electrical and hose bibs
	Fair	7.10	Pipe or light tubular arch, double poly., fiberglass ends & knee walls	Gravel floor	Minimum electrical, lighting and water
	Low Cost	4.88	Trussed pipe arch, double polyethylene cover, fiberglass end walls	Dirt floor	Minimum equipment outlet and hose bibs
	Cheap	4.34	Light pipe arch, wide spacing, polyethylene cover	Dirt floor	No electrical, hose bib only

For modified hoop structures (3' straight side wall), add 5%.

SHADE SHELTERS

D	Average	$3.37	Light wood posts and girders, shade netting cover	Some gravel	No electrical, hose bibs only
	Low	2.48	No walls, wood posts and cable, flat shade netting roof	Dirt floor	Hose bibs only
S	Average	3.70	Light pipe columns and girders, shade netting cover	Some gravel	No electrical, hose bibs only
	Low	2.77	No walls, steel pipe and cable, flat shade netting roof	Dirt floor	Hose bibs only

LATH SHADE HOUSES

D	Average	$7.34	Wood skeleton frame, spaced wood lath	Gravel, some concrete walks	Equipment outlets and hose bibs
S	Average	12.70	Metal skeleton frame, spaced aluminum lath	Gravel, some concrete walks	Equipment outlets and hose bibs

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GREENHOUSES

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1

ADJUSTMENTS	COST RANGE
Humidifiers, each	$615.00 - $3,050.00
Exhaust fan cooling assembly, per. sq. ft. of pad	1,070.00 - 2,875.00
Water-drip humidity pad assembly, per sq. ft. of pad	19.40 - 31.00
Automatic vent and/or environmental controls, per unit	1,070.00 - 2,750.00
Automatic chemical injectors (excluding tanks), per unit	3,575.00 - 6,350.00
Automatic water controls, per unit	403.00 - 1,020.00
Traveling boom sprayer, per linear foot of rail	65.50 - 137.00
Roof shade curtains, per sq. ft. of cover, man	1.05 - 1.30
Hinged sidewall vents, manual, per linear foot	44.25 - 53.00
Automatic sidewall curtain assembly, per linear foot	18.15 - 23.85
Concrete Curb per linear foot	3.96 - 8.72
Stem Knee Walls. Per linear foot	16.90 - 21.05

MISCELLANEOUS SQUARE FOOT COSTS

Electrical: Low Cost $.33 ; Average, $1.02; Good, $2.07; Excellent, $3.59

Floors or walks: Dirt, $.33 - $.52; Gravel, $.73 - $1.06; Asphalt, $2.80 - $4.57; Concrete, $4.12 - $6.03

Water system, plastic: Spray, $.27 - $.44; Mist, $.40 - $.68; Drip tube, $.47- $.78

Planting benches, per square foot of bench: Plastic, $5.11 - $8.15; Wood slat, $8.08 - $9.21; Solid propagating, $8.59 - $15.35

2

HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Hot water or steam	$7.13
Gas furnaces	4.78
Suspended gas heaters	4.09
add for fan-jet duct distribution	1.44
Ventilation, fans only	0.82

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.973
8	.983
9	.991
10	1.000 (base)
11	1.009
12	1.018
13	1.027
14	1.036
16	1.055
18	1.074

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER													Average Floor Area, Sq. Ft./Story
	90	120	200	300	500	600	800	1000	1200	1400	1600	1800	2000	
500	1.710	1.750	1.840	----	----	----	----	----	----	----	----	----	----	**500**
1,000	1.650	1.670	1.720	1.780	----	----	----	----	----	----	----	----	----	**1,000**
2,000	1.360	1.370	1.410	1.450	----	----	----	----	----	----	----	----	----	**2,000**
4,000	----	1.170	1.200	1.240	1.320	----	----	----	----	----	----	----	----	**4,000**
5,000	----	----	1.150	1.160	1.180	1.190	----	----	----	----	----	----	----	**5,000**
6,000	----	----	----	1.110	1.130	1.140	----	----	----	----	----	----	----	**6,000**
8,000	----	----	----	1.040	1.060	1.070	1.080	----	----	----	----	----	----	**8,000**
10,000	----	----	----	.950	.990	1.000	1.020	1.040	----	----	----	----	----	**10,000**
20,000	----	----	----	----	.830	.840	.860	.880	----	----	----	----	----	**20,000**
25,000	----	----	----	----	----	.800	.820	.840	.860	----	----	----	----	**25,000**
50,000	----	----	----	----	----	----	.680	.700	.720	.740	----	----	----	**50,000**
100,000	----	----	----	----	----	----	----	.580	.590	.600	.610	----	----	**100,000**
200,000	----	----	----	----	----	----	----	----	.550	.560	.570	.580	.590	**200,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

PACKING AND COLD STORAGE BUILDINGS



CLASS S FRUIT PACKING BARN

OCCUPANCY DESCRIPTION: Seed processing storage buildings are designed for bulk storage, cleaning and bagging of various grass seeds and for temporary bag storage and distribution. Costs include a heavy concrete floor and storage bins.

Fruit packing barns are for the packing and short-term storage of fresh produce.



AVERAGE CLASS C COLD STORAGE

Cold storage buildings are designed to keep stored horticultural crops at various temperature levels. Some partitions and office areas are included in the better qualities.

INCLUDED IN COSTS: Built-in refrigerator rooms.

NOT INCLUDED IN COSTS: Heat, refrigeration or special fixtures or packing equipment.

SEED PROCESSING STORAGE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Average	$44.75	Heavy wood frame, studs and roof, wood siding, sliding	Heavy bins and concrete slab, cleaning area, warehouse	Rigid conduit, dustproof fixtures, water service
D POLE	Average	40.25	Metal siding on pole frame, stud infill sheathing, sliding doors	Heavy bins and concrete slab, cleaning area, warehouse	Rigid conduit, dustproof fixtures, water service
S	Average	43.25	Steel frame and siding, some sheathing, sliding doors	Heavy bins and concrete slab, cleaning area, warehouse	Rigid conduit, dustproof fixtures, water service
DS	Mezzanine	15.05	Not included	Loft floor, adequate support, heavy plywood or plank flooring	Not included

FRUIT PACKING BARNS

C	Average	$46.75	Block or tilt-up, light truss, metal or built-up roof	Produce cooler, concrete slab,small finished office	Good lighting, water service
D	Average	42.25	Plywood on studs or box frame, metal or composition roof	Fruit cooler, concrete slab, small finished office	Good lighting, water service
D POLE	Average	39.75	Metal siding on poles, no wainscot	Fruit cooler, concrete slab, small finished office	Good lighting, water service
S	Average	43.25	Steel siding and frame	Fruit cooler, concrete slab, small finished office	Good lighting, water service

FARM COLD STORAGE BUILDINGS

C	Good	$69.00	Steel or wood frame or bearing walls, block or tilt-up, insulated	Cooler and chilled rooms, some distribution office and finish	Adequate lighting and plumbing
	Average	48.75	Block, tilt-up, light construction, exposed ceiling insulation	Cooler storage, unfinished, few partitions, small office	Minimum lighting and plumbing
	Low Cost	34.50	Block, tilt-up, very plain, light construc-tion, exposed ceiling insulation	Cooler storage, unfinished, concrete slab	Minimum lighting and water service
D	Good	64.00	Good wood frame with stucco or siding, fully insulated	Cooler and chilled rooms, some distribution office and finish	Adequate lighting and plumbing
	Average	44.00	Stucco or siding on wood, exposed ceiling insulation	Cooler storage, unfinished, few partitions, small office	Minimum lighting and plumbing
	Low Cost	30.50	Stucco or siding on studs or box frame, exposed insulation	Cooler storage, unfinished, concrete slab	Minimum lighting and water service
D POLE	Average	41.75	Pole frame, metal siding, lined, exposed ceiling insulation	Cooler storage, unfinished, few partitions, small office	Minimum lighting and plumbing
	Low Cost	29.50	Pole frame, metal siding, exposed insulation	Cooler storage, unfinished, concrete slab	Minimum lighting and water service
S	Good	64.00	Rigid steel frame, insulated siding or low-cost sandwich panels	Cooler and chilled rooms, some distribution office and finish	Adequate lighting and plumbing
	Average	45.00	Pre-engineered frame, metal siding, lined, exposed ceiling insulation	Cooler storage, unfinished, few partitions, small office	Minimum lighting and plumbing
	Low Cost	31.50	Light frame, metal siding, exposed insulation	Cooler storage, unfinished, concrete slab	Minimum lighting and water service

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

PACKING AND COLD STORAGE BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1 ADJUSTMENTS

Cold storage refrigeration	
Freezer/sharp freezer	$29.25
Chiller/freezer	25.00
Cooler/chilled air	21.40
Cooled air only	18.55
Controlled atmosphere	
Non environmental buildings	
Conditioned/ventilated air	6.36
Cooled air	16.35

For dock-height floors, add the cost per square foot to the base cost of the first floor.

Elevated on compacted fill: $5.18 – $10.20 per square foot. For cut and balance, use proportional cost.

Elevated on posts and piers with cross bracing, beams and skirting: $14.15 – $19.20 per square foot

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	100	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	1.044	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	1,000
2,000	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	2,000
3,000	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	3,000
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	4,000
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	5,000
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	6,000
7,000	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	7,000
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	8,000
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	9,000
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	10,000
12,000	----	----	----	----	.833	.843	.855	.867	.888	.911	.934	.955	.977	1.000	12,000
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	14,000
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	18,000
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	20,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FRUIT/VEGETABLE STORAGE BUILDINGS



CHEAP CLASS D POTATO STORAGE



LOW-COST S ENVIRONMENTAL

OCCUPANCY DESCRIPTION: Potato storage buildings are designed to provide long term storage. The masonry structures are built below grade with heaped earth on three sides, while the wood or steel frame buildings have metal or wood siding with insulated walls and roof.

Fruit/vegetable buildings are the modern, controlled atmosphere buildings for the long-term storage of apples, potatoes, onions, etc.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Built-in refrigerator and fan rooms.

NOT INCLUDED IN COSTS: No heat, refrigeration or controlled atmosphere equipment or sensors.

POTATO STORAGE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
C	Good	$77.50	Block, below grade, heaped earth 3 sides, heavy insulation and roof	Partitions, bulkheads, plank floors raised over concrete, heating ducts	Adequate electrical, water service
	Average	52.00	Block, below grade, heaped earth three sides, insulation	Partitions, bulkheads, plank floors on concrete, heating ducts	Minimum lighting, no plumbing
	Low Cost	35.00	Block or tile, light insulation and roof	Partitions, concrete air channels	Minimum lighting only
	Cheap	18.90	Dirt trench, block end walls only, pole rafters, straw, dirt cover	Unfinished, dirt floor	Minimum electrical only
D	Good	72.50	Wood T&G on heavy studs, heavily insulated	Heavy partitions and bulkheads, plank floors raised	Adequate lighting outlets, water service
	Average	46.75	Plywood or siding on wood studs, good roof, moderate insulation	Partitions, bulkheads, plank floors on concrete, heating ducts	Minimum lighting, no plumbing
	Low Cost	30.25	Plywood, lightly insulated roof	Partitions, concrete air channels	Minimum lighting only
	Cheap	15.15	Dirt trench, wood end walls only, pole rafters, straw, dirt cover	Unfinished, dirt floor	Minimum electrical only
D POLE	Good	67.00	Pole frame, metal panels and sheathing, heavily insulated	Heavy partitions and bulkheads, plank floors raised	Adequate lighting outlets, water service
	Average	43.25	Pole frame, good metal panels, roof, moderately insulated	Partitions, bulkheads, plank floors on concrete, heating ducts	Minimum lighting, no plumbing
	Low Cost	28.00	Pole frame, lightly insul. roof	Partitions, concrete air channels	Minimum lighting only
	Cheap	13.65	Dirt trench, metal end walls only, pole rafters, straw, dirt cover	Unfinished, dirt floor	Minimum electrical only
S	Good	71.50	Metal sandwich panels or steel and sheathing, heavily insulated	Heavy partitions and bulkheads, plank floors raised	Adequate lighting outlets, water service
	Average	47.25	Steel siding, frame, good roof, moderately insulated	Partitions, bulkheads, plank floors on concrete, heating ducts	Minimum lighting, no plumbing
	Low Cost	31.50	Galv. steel, lightly insulated roof	Partitions, concrete air channels	Minimum lighting only

VEGETABLE BUILDINGS - ENVIRONMENTAL

S SLANT WALL	Good	$69.50	Built-up steel sandwich envelope cavity wall and roof, insulated	Concrete floor and plenum with catwalk, attached fan	Adequate electrical and water service
	Fair	49.50	Built-up steel sandwich envelope cavity wall and roof, insulated	Elevated concrete floor, plenum, catwalk, attached fan room	Adequate electrical and water service
	Low Cost	44.25	Built-up steel sandwich envelope cavity wall and roof, insulated	Dirt floor, concrete center plenum, catwalk, attached fan room	Adequate electrical and water service

CONTROLLED ATMOSPHERE BUILDINGS

C	Average	$59.50	Block, tilt-up, light construction, sealed ceiling insulation	Controlled atmosphere storage, sealed rooms, double slab	Adequate electrical and water service
D	Average	55.00	Stucco or siding on wood, sealed ceiling	Controlled atmosphere storage, sealed rooms, double slab	Adequate electrical and water service
D POLE	Average	52.00	Pole frame, metal siding, lined, sealed ceiling insulation	Controlled atmosphere storage, sealed rooms, double slab	Adequate electrical and water service
S	Average	56.00	Pre-engineered frame, metal siding, lined, sealed ceiling insulation	Controlled atmosphere storage, sealed rooms, double slab	Adequate electrical and water service

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FRUIT/VEGETABLE STORAGE BUILDINGS

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

ADJUSTMENTS

Controlled atmosphere	
Non environmental buildings	
Conditioned/ventilated air	$6.36
Cooled air	16.35
Environmental buildings	
Fruits, conditioned and cooled air	36.00
Vegetables, high to precise humidity	65.50
Warm and cooled air	86.50

2 HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3 HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	100	125	150	200	250	300	350	400	500	600	700	800	900	1000	
1,000	1.044	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	----	----	1,000
2,000	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	----	----	2,000
3,000	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	----	----	3,000
4,000	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	----	----	4,000
5,000	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	----	----	5,000
6,000	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	----	----	6,000
7,000	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	----	----	7,000
8,000	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	1.076	----	8,000
9,000	----	----	----	.836	.852	.867	.881	.896	.926	.955	.985	1.014	1.044	----	9,000
10,000	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	1.018	1.044	10,000
12,000	----	----	----	----	.833	.843	.855	.867	.888	.911	.934	.955	.977	1.000	12,000
14,000	----	----	----	----	.825	.835	.844	.854	.873	.892	.911	.931	.949	.967	14,000
18,000	----	----	----	----	----	.822	.828	.836	.852	.867	.881	.896	.911	.926	18,000
20,000	----	----	----	----	----	.818	.824	.831	.844	.858	.871	.884	.898	.911	20,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM LABOR HOUSING



OCCUPANCY DESCRIPTION: These buildings provide minimum living facilities for families. The construction is usually box frame with plywood or board and batten exterior finish. Concrete or board floors, no partitions and minimum cabinetry are included in the costs. Minimum lighting and electrical outlets and kitchen sink with cold water service will normally be found.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Heat, sprinklers, kitchen equipment or recreational equipment.

TRANSIENT LABOR CABINS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING & PLUMBING
D	Average	$45.50	Box frame, plywood, board and batten or metal siding	Slab or board floor, no partitions, minimum cabinetry	One or two lights and outlets, sink with cold water

LABOR DORMITORIES (BUNK HOUSES)

C	Good	$71.00	Cheap brick, stucco on block, good fenestration, insulated	Concrete floor, gypsum or plywood partitions, individual rms.	Lighting and outlet in each room, common shower room
	Average	55.50	Block, adequate fenestration	Concrete floor, common rooms	Adequate lighting, plumbing in common restroom
	Low Cost	43.25	Low-cost block, minimum fenestration	Unfinished, no partitions	Minimum lighting and water service
D	Good	66.00	Stucco or siding on studs, good fenestration, insulated	Concrete floor, gypsum or plywood partitions, individual rms.	Lighting and outlet in each room, common shower room
	Average	48.75	Plywood or siding on box frame or wide-spaced studs	Concrete floor, common rooms	Adequate lighting, plumbing in common restroom
	Low Cost	36.25	Box frame, plywood or board and batten	Light slab, unfinished interior	Minimum droplights, water service
S	Good	67.00	Steel panels and frame, good fenestration, insulated	Concrete floor, gypsum or plywood partitions, individual rms.	Lighting and outlet in each room, common shower room
	Average	50.50	Steel panels and frame, sheathing	Concrete floor, common rooms	Adequate lighting, minimum plumbing
CDS	Utility Basement	29.75	Unfinished block or concrete walls, waterproofed, concrete slab	Unfinished storage and utility, open stairs or outside entry	Minimum light fixtures and outlets, floor drain
	Unfinished Cellar	11.35	Excavated dirt walls	Unfinished, dirt floor, post and pier flooring supports	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM LABOR HOUSING

REFINEMENTS: This page provides major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio, and locality.

1

KITCHENS: For units having kitchens or built-in kitchen units, add the following:

Excellent (stove, refrigerator, sink & cabinet unit)	$7,500
Good	5,500
Average (cabinets and sink)	4,100
Low cost	3,050

ADDITIONAL EQUIPMENT

Water heater	$1,080 - $2,380
Exhaust fan	$153 - 384

2

HEATING AND COOLING

These costs are averages of total installed cost of the entire heating or cooling installation including its prorated share of contractors' overhead and profit and architects' fees.

Electric cable or baseboard	$6.36
Electric wall heaters (inc. FWA)	2.71
Forced air, ducted	7.13
heaters or furnace, vented	2.01
Hot water, baseboard/convector	12.70
radiant floor or ceiling	13.05
Space heaters, with fan	3.49
radiant	4.09
Steam	11.30
Wall or floor furnace	3.23
Package heating and cooling	14.05
Ventilation, blower and ducts	2.01
fans only	0.82

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS

Multiply base cost by following multiplier for any variation in average story height.

Average Wall Height	Square Foot Multiplier
7	.943
8	.963
9	.981
10	1.000 (base)
11	1.019
12	1.038
13	1.058
14	1.077
16	1.115
18	1.154
20	1.192
22	1.231
24	1.269
28	1.346
32	1.423
36	1.500

4

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER														Average Floor Area, Sq. Ft./Story
	50	75	100	125	150	200	250	300	350	400	500	600	700	800	
500	1.044	1.178	1.311	1.444	1.577	1.844	2.110	2.377	2.643	2.909	----	----	----	----	**500**
750	.955	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.023	2.201	----	----	----	----	**750**
1,000	.911	.980	1.011	1.110	1.178	1.311	1.444	1.577	1.711	1.844	----	----	----	----	**1,000**
1,500	.866	.911	.955	1.000	1.044	1.133	1.222	1.311	1.400	1.489	----	----	----	----	**1,500**
2,000	----	.878	.911	.945	.977	1.044	1.110	1.178	1.245	1.311	----	----	----	----	**2,000**
2,500	----	.858	.884	.911	.938	.991	1.044	1.097	1.150	1.204	----	----	----	----	**2,500**
3,000	----	.843	.865	.889	.911	.955	1.000	1.044	1.088	1.133	----	----	----	----	**3,000**
3,500	----	----	.854	.872	.892	.931	.967	1.006	1.044	1.080	1.157	----	----	----	**3,500**
4,000	----	----	----	.860	.878	.911	.945	.977	1.010	1.044	1.110	1.178	----	----	**4,000**
5,000	----	----	----	.844	.857	.884	.911	.938	.960	.991	1.044	1.097	1.150	----	**5,000**
6,000	----	----	----	----	.843	.865	.888	.911	.934	.955	1.000	1.044	1.088	1.133	**6,000**
7,000	----	----	----	----	.835	.854	.873	.892	.911	.931	.967	1.006	1.044	1.080	**7,000**
8,000	----	----	----	----	----	.844	.860	.877	.894	.911	.945	.977	1.010	1.044	**8,000**
10,000	----	----	----	----	----	----	.844	.858	.871	.884	.911	.938	.960	.991	**10,000**

Use the total length of walled sides as the perimeter.

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CORN CRIBS



OCCUPANCY DESCRIPTION: Dry storage of corn on the cob.

For frame cribs, see Page 267.

Cylindrical wire mesh corn cribs with concrete base, steel frame and conical steel roof . . . $3.41 – $5.86 per bushel of capacity.

BASE STRUCTURE: Cost each

DIAMETER	HEIGHT	CAPACITY Bushels	COST RANGE	DIAMETER	HEIGHT	CAPACITY Bushels	COST RANGE
8’	8’	134.1	$605 - $880	14’	16’	821	$2,925 - $4,600
	12’	201.1	835 - 1,260		20’	1,026.3	3,575 - 5,700
	16’	268.1	1,070 - 1,630		24’	1,231.5	4,250 - 6,850
10’	12’	314.2	1,230 - 1,850	16’	16’	1,072.3	3,725 - 6,000
	16’	418.9	1,580 - 2,450		20’	1,340.4	4,550 - 7,400
	20’	523.6	1,940 - 3,000		24’	1,608.5	5,450 - 8,800
12’	12’	452.4	1,700 - 2,650		28’	1,876.6	6,400 - 10,300
	16’	603.2	2,190 - 3,425				
	20’	754	2,700 - 4,250				
	24’	904.8	3,175 - 5,050				

Deduct $4.30 per square foot for lack of slab.
If no roof deduct $4.12 to $5.40 per square foot.

HORIZONTAL SILOS



BUNKER SILOS

OCCUPANCY DESCRIPTIONS: A bunker silo is used primarily for corn or grass silage. Treated plank side walls or tilt-up concrete panels with open ends. Usually above ground with concrete floor on grade.



BUNKER SILOS

A trench silo is used primarily for corn or grass silage. Usually below ground with concrete or treated plank floor and side walls.

COST PER LINEAR FOOT OF LENGTH	WIDTH, Feet						
BUNKER SILOS (Above ground)	**20**	**30**	**40**	**50**	**60**	**80**	**100**
Tilt–up concrete panels and precast wall supports, sealed	$496	$555	$615	$655	$680	$755	$790
Poles and braces, tilt–up concrete panels, concrete floor	358	404	441	480	510	555	610
Cantilevered poles, plywood or T&G walls, concrete floor	305	358	397	434	473	525	570
TRENCH SILOS (Below ground)							
Concrete wall panels and floor, sealed	$480	$570	$625	$740	$795	$910	$1,020
Plywood or T&G walls, concrete floor	351	441	525	600	665	790	905
Dirt trench, plastic lined, no flooring	94	135	175	223	253	335	411

Add or deduct 8% for each foot of deviation from the 12’ base height. For concrete tilt-up panels on bunker silos 16’ and over, add 10% for each foot of deviation from 12’ base height. For asphalt floor, deduct $ 1.22 per square foot. For roof cover, add $3.75 to $5.73 per square foot. For end walls, add per linear foot: 8’ high, $111; 12’ high, $159; 16’ high, $213.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FEED LOTS
Bunk Feeders



CATTLE FEED BUNK

OCCUPANCY DESCRIPTION: Two sided feeders used in cattle lots, for beef or dairy cattle. Concrete construction with plank sides or post and plank construction.

BASE STRUCTURE	COST/LIN. FT.
Concrete	$72.50 - $102.00
Plank	35.25 - 43.00
Steel	59.50 - 72.50
Wood	34.75 - 47.00



CATTLE FENCE BUNK

OCCUPANCY DESCRIPTION: One sided feeder used in cattle lots, for beef or dairy cattle. Concrete or post and plank construction.

BASE STRUCTURE	COST/LIN. FT.
Concrete	$53.00 - $62.50
Plank	29.00 - 36.25
Steel	40.25 - 51.50
Wood	20.60 - 31.50

ADJUSTMENTS	COST/LIN. FT.
Roof 10' wide, wood	$62.50 - $76.00
Metal	75.50 - 85.50
10' concrete apron	27.25 - 31.75
Mechanical feeder, automatic control	334.00 - 395.00
Manual control	129.00 - 182.00

For stock fencing, see Page 250.

STOCK WATERER – Cost each	
Used in cattle and hog feed lots	
Underground piping, wiring, automatic controls	
Cattle	749.00 - 898.00
Hogs or sheep	476.00 - 618.00
Combination cattle and hogs	657.00 - 799.00

YARD PAVING – Cost per square foot	
Concrete, plain, 4" thick	6.40 - 9.56
6"	7.56 - 11.24
mesh reinforced, 4"	6.98 - 11.07
6"	8.14 - 12.75
Asphalt paving, 2" thick	2.87 - 4.23
Crushed rock, 3" thick	1.15 - 1.92

SILOS

GLASS-LINED STEEL: Complete with ladder, dome roof. Mechanical unloading equipment not included.

SIZE DIAMETER (ft.) x HEIGHT (ft.)	COST	SIZE DIAMETER (ft.) x HEIGHT (ft.)	COST
14x23	$50,500	20x68	$134,000
14x32	56,250	20x77	149,000
14x41	66,500	20x87	168,000
17x31	71,750	25x34	148,000
17x40	78,000	25x42	158,000
17x49	87,750	25x43	162,000
20x28	76,250	25x51	182,000
20x32	82,500	25x60	185,000
20x33	87,750	25x69	204,000
20x38	92,250	25x79	228,000
20x41	95,500	25x88	250,000
20x43	97,000	31x70	289,000
20x50	107,000	31x80	316,000
20x59	118,000	31x89	352,000

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SILOS



CONCRETE STAVE



REINFORCED CONCRETE CAST-IN-PLACE

OCCUPANCY DESCRIPTION: Used to store corn or grass silage, haylage, high-moisture grain and other fermented feed.

NOT INCLUDED IN COSTS: Mechanical unloading equipment.

CONCRETE STAVE: Complete with ladder, chute and dome roof.

DIAMETER	HEIGHT (Feet)						
(Feet)	30	40	50	60	70	80	90
10	$15,700	$20,700	$26,000	----	----	----	----
12	16,400	22,300	27,700	$33,000	----	----	----
14	19,100	25,600	31,600	37,900	$44,100	----	----
16	19,800	26,300	32,900	39,200	45,800	$52,250	----
18	21,300	28,300	35,500	42,500	49,600	56,500	$63,500
20	23,900	31,600	39,800	47,700	55,500	63,250	71,250
22	27,900	36,900	46,000	55,250	64,250	73,250	82,500
24	----	----	53,000	63,500	74,000	84,000	94,750
30	----	----	----	86,250	101,000	115,000	129,000

REINFORCED CONCRETE, CAST-IN-PLACE: Complete with ladder, chute and dome roof.

DIAMETER	HEIGHT (Feet)						
(Feet)	30	40	50	60	70	80	90
10	----	----	----	----	----	----	----
12	$23,900	$31,500	$39,500	$47,300	----	----	----
14	27,600	36,400	45,400	54,250	$63,500	----	----
16	28,300	37,800	47,100	56,500	66,000	$75,000	----
18	30,600	40,800	50,750	61,000	71,250	81,250	$91,000
20	34,300	45,800	57,000	68,500	79,750	91,000	102,000
22	39,900	53,000	66,250	79,000	92,250	106,000	119,000
24	----	----	76,250	91,250	107,000	121,000	136,000
30	----	----	----	111,000	129,000	148,000	164,000

ADJUSTMENTS

For no chute, deduct $24.65 to $29.75 per vertical linear foot.
For flat roof, deduct $7.89 per square foot of area.
For no roof, deduct $14.85 per square foot of area.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STEEL GRAIN BINS

STANDARD BINS: Costs are averages for utility-type storage bins usually found on farms and ranches. Costs of standard bins are for tank with door and manhole, erected on the buyer's slab. Height is to top of shell. Cost of ventilated floor includes floor, auger tube, and steel columns and beam supports of plenum assembly, fans and heat.



ADJUSTMENTS:

Ladders: . . . . . $98.00 plus $13.95 per linear foot
For safety cages, add: . . . . . .$27.25 to $33.75 per linear foot installed
Auger and drive: . . . . . $580.00 plus $56.50 to $68.50 per foot of bin diameter
For small feed tanks, use $140 to $170 per foot. Add $6,700 for scale.
For spreaders, add: . . . . . $1,130.00 to $1,700.00
For stirrators, add: . . . . . $264 to $403 per foot of bin diameter

DIAMETER (Feet)	HEIGHT (Feet)	CAPACITY (Bushels)	COST		
			W/OUT DRYING BIN	WITH DRYING BIN	SLAB FLOOR
15	7	1,257	$7,000	$10,100	$935
	11	1,792	9,100	13,400	1,020
	15	2,329	10,900	16,000	1,170
18	11	2,647	10,100	14,800	1,260
	15	3,422	12,600	18,200	1,310
	18	4,198	14,300	20,700	1,360
	26	5,748	18,800	-----	1,520
21	11	3,693	11,200	16,300	1,720
	18	5,813	17,300	25,200	1,850
	26	7,934	22,700	-----	2,080
24	15	6,344	16,700	24,600	2,280
	18	7,739	20,900	30,300	2,390
	26	10,528	27,500	-----	2,650
	33	13,318	32,700	-----	2,800
30	18	12,473	28,800	41,800	3,400
	26	16,863	36,900	-----	3,925
	33	21,252	44,000	-----	4,250
36	22	21,648	45,400	-----	5,300
	26	24,823	51,000	-----	5,650
	33	31,174	57,500	-----	5,850
	40	37,524	63,750	-----	6,300
42	26	34,382	62,500	-----	7,750
	33	43,026	74,000	-----	8,100
	40	51,670	87,000	-----	8,700
	48	60,314	101,000	-----	9,250
48	26	45,684	80,500	-----	10,100
	33	56,974	98,750	-----	10,600
	40	68,264	117,000	-----	11,300
	48	79,554	136,000	-----	12,300

FEED TANKS: Costs are averages of typical farm hoppers with roof, manhole and ladder including necessary steel structural supports and concrete footings. Height is overall from ground level to top of tank. Capacity in tons is figured at 50 pound per bushel. Costs do not include delivery auger.

DIAMETER (Feet)	HEIGHT (Feet)	CAPACITY (Bushels)	CAPACITY (Tons)	COST
6	10	120	3.0	2600.00
6	16	240	6.0	3675.00
6	21	360	9.0	4175.00
6	25	480	12.0	4700.00
6	28	600	15.0	5200.00
9	14	300	7.8	5350.00
9	17	458	11.3	6400.00
9	20	594	14.8	7000.00
9	25	866	21.8	8050.00
9	28	1,000	25.0	8500.00

DIAMETER (Feet)	HEIGHT (Feet)	CAPACITY (Bushels)	CAPACITY (Tons)	COST
9	31	1,130	28.5	8800.00
12	20	870	21.8	12000.00
12	25	1,345	33.6	13600.00
12	31	1,825	45.6	15500.00
12	36	2,300	57.5	16700.00
12	42	2,780	69.5	18200.00
15	33	4,030	100.75	21300.00
15	41	5,220	130.5	25200.00
18	34	5,980	149.5	30100.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STEEL TANKS



Notes: For utility bins with less capacity or heavy corrugated, see Page 280. Add $381 to $404 per running foot of tunnel and $223 to $260 conveyor gallery.

Add $.16 to $.27 per bushel for aeration systems.

BUSHEL CAPACITY	HEAVY BOLTED STEEL (per Tank)
	Cost per Bushel
15,000	$4.21
20,000	4.03
25,000	3.88
30,000	3.75
35,000	3.67
40,000	3.60
50,000	3.46
60,000	3.36
80,000	3.19
100,000	3.09
125,000	2.97
150,000	2.88
175,000	2.84
200,000	2.75
250,000	-----
300,000	-----
400,000	-----

GLASS-LINED TANKS

For silos, see Page 278; for slurry tanks, see Page 282.









© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MANURE AND WATER MANAGEMENT SYSTEMS

VERTICAL TURBINE PUMPS (base depth = 100 feet)

If the motor horsepower, flow and depth are known, enter the table directly, adding or subtracting 5% of the base cost for each 20 feet of depth variation from the 100-foot base.

If the flow capacity is not known, the underlined figures are the average costs.

If the depth is not known, the other figures will give an approximation of average cost based on flow and motor capacity.

Costs are averages including motor, pump electric panels, starters, switches and complete installation, but do not include the cost of electric service to site or well costs.

CAPACITY (GPM)	MOTOR HORSEPOWER 5	10	20	30	40	50	60	75	100	125	150	200	250	300	400	500	CAPACITY (GPM)
200	$14,000	$15,500	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	200
400	16,400	17,200	$18,800	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	400
600	18,800	19,800	21,400	$23,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	600
800	-----	23,000	24,100	26,000	$28,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	800
1,000	-----	26,000	27,700	28,700	30,500	$32,300	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	1,000
1,500	-----	-----	34,300	35,800	37,800	39,500	$41,100	-----	-----	-----	-----	-----	-----	-----	-----	-----	1,500
2,000	-----	-----	-----	42,400	43,800	45,700	47,300	$49,700	-----	-----	-----	-----	-----	-----	-----	-----	2,000
2,500	-----	-----	-----	-----	51,500	53,500	54,750	56,750	$60,750	$65,000	-----	-----	-----	-----	-----	-----	2,500
3,000	-----	-----	-----	-----	-----	59,250	60,750	62,500	66,500	70,250	$74,000	$83,000	$93,000	-----	-----	-----	3,000
4,000	-----	-----	-----	-----	-----	-----	73,250	75,500	79,750	83,750	88,250	97,750	109,000	$121,000	-----	-----	4,000
5,000	-----	-----	-----	-----	-----	-----	-----	87,750	91,250	96,000	101,000	110,000	121,000	133,000	$159,000	-----	5,000
6,000	-----	-----	-----	-----	-----	-----	-----	-----	95,500	108,000	112,000	121,000	133,000	143,000	171,000	$201,000	6,000
8,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	132,000	135,000	147,000	157,000	170,000	195,000	226,000	8,000
10,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	161,000	172,000	182,000	197,000	223,000	251,000	10,000
12,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	201,000	211,000	226,000	251,000	280,000	12,000

WELL JET SYSTEMS

Well jet system cost includes motor, pump, piping at well, drilling and casing.
Add for storage tanks. For precharged tanks, add 75%.

PUMP (HP.)	SHALLOW (To 25' Depth)	DEEP (To 100' Depth)
1/3	$2,525 - $2,950	$5,300 - $6,800
1/2	2,800 - 3,225	5,650 - 7,150
3/4	3,125 - 3,700	5,950 - 7,550
1	3,225 - 4,100	6,250 - 7,950
1-1/2	3,575 - 4,550	6,800 - 8,550

WATER TANKS

SIZE (Gal.)	COST RANGE	SIZE (Gal.)	COST RANGE
12	$121 - 168	120	$441 - $555
21	175 - 213	220	985 - 1,160
40	223 - 282	315	1,240 - 1,590
80	305 - 365	525	1,810 - 2,040

WINDMILLS

Cost includes steel wheel and tower complete, excluding well.

TOWER HEIGHT	WINDMILL SIZE 6'	8'	10'	12'	14'	16'
21'	$8,100	$8,600	$11,400	—	—	—
27'	8,850	9,050	12,400	$17,000	$24,000	—
33'	10,000	10,200	13,300	18,100	26,600	$32,500

SLURRY TANKS

Costs are averages for glass-lined slurry storage tanks with ladder, erected on buyers' slabs. For concrete slab, add $9.17 to $11.15 per cubic foot of concrete. For pumps, see below.

DIA.	HEIGHT	COST	DIA.	HEIGHT	COST
25'	14'	$58,250	81'	14'	$155,000
	23'	63,250		19'	188,000
42'	14'	73,250		23'	230,000
	23'	96,250	101'	14'	197,000
62'	14'	104,000		19'	254,000
	23'	151,000		23'	305,000

LIQUID MANURE TANKS

Cost per cubic foot for complete concrete tanks. For plank cover, deduct $6.37 per square foot of top; for no cover, deduct $13.15. Rectangular tanks, $4.12 - $6.44, round tanks, $3.58 - $5.26; open pits, concrete, $2.31 - $3.15; large lagoons, clay, $.27 - $.52; agitator pumps, $13,900-$38,100 each; add $10,300 for lagoon flotation systems.

*FLOOR AREA/PERIMETER MULTIPLIERS

Average Floor Area, Sq. Ft./Story	AVERAGE PERIMETER 75	100	125	150	200	250	300	400	500	600	700	800	900	1000	Average Floor Area, Sq. Ft./Story
500	1.178	1.311	1.444	1.577	1.844	2.11	2.377	2.909	-----	-----	-----	-----	-----	-----	500
750	1.044	1.133	1.222	1.311	1.489	1.667	1.844	2.201	-----	-----	-----	-----	-----	-----	750
1,000	0.98	1.044	1.11	1.178	1.311	1.444	1.577	1.844	-----	-----	-----	-----	-----	-----	1,000
2,000	0.878	0.911	0.945	0.977	1.044	1.11	1.178	1.311	-----	-----	-----	-----	-----	-----	2,000
3,000	0.843	0.865	0.889	0.911	0.955	1	1.044	1.133	-----	-----	-----	-----	-----	-----	3,000
4,000	-----	-----	0.86	0.878	0.911	0.945	0.977	1.044	1.11	1.178	-----	-----	-----	-----	4,000
5,000	-----	-----	0.844	0.857	0.884	0.911	0.938	0.991	1.044	1.097	1.15	-----	-----	-----	5,000
8,000	-----	-----	-----	-----	0.844	0.86	0.877	0.911	0.945	0.977	1.01	1.044	1.076	-----	8,000
10,000	-----	-----	-----	-----	-----	0.844	0.858	0.884	0.911	0.938	0.96	0.991	1.018	1.044	10,000
14,000	-----	-----	-----	-----	-----	0.825	0.835	0.854	0.873	0.892	0.911	0.931	0.949	0.967	14,000
20,000	-----	-----	-----	-----	-----	-----	0.818	0.831	0.844	0.858	0.871	0.884	0.898	0.911	20,000
25,000	-----	-----	-----	-----	-----	-----	0.81	0.82	0.831	0.841	0.852	0.863	0.873	0.884	25,000

USE FOR AREA/PERIMETERS NOT FOUND WITH INDIVIDUAL BUILDING OCCUPANCIES

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FARM BUILDING DEPRECIATION SCHEDULE

(Except residences and residential garages)

Age	REMAINING CONDITION Silos	Buildings	Age	REMAINING CONDITION Silos	Buildings
1	97%	98%	32	32%	48%
2	95%	96%	33	30%	47%
3	92%	94%	34	29%	46%
4	90%	92%	35	27%	45%
5	87%	90%	36	26%	44%
6	85%	88%	37	24%	43%
7	82%	86%	38	23%	42%
8	80%	84%	39	21%	41%
9	77%	82%	40	20%	40%
10	75%	80%	41		39%
11	72%	78%	42		38%
12	70%	76%	43		37%
13	67%	74%	44		35%
14	65%	72%	45		35%
15	62%	70%	46		34%
16	60%	68%	47		33%
17	57%	66%	48		32%
18	55%	64%	49		31%
19	52%	62%	50		30%
20	50%	60%	51		29%
21	48%	59%	52		28%
22	47%	58%	53		27%
23	45%	57%	54		26%
24	44%	56%	55		25%
25	42%	55%	56		24%
26	41%	54%	57		23%
27	39%	53%	58		22%
28	38%	52%	59		21%
29	36%	51%	60		20%
30	35%	50%	Older		20%
31	33%	49%			

Age = Tax Year - date of construction

Example: A 2025 assessment is being figured for a building constructed in 2005. The age is 20 years. It is recognized that exceptional, as well as poor maintenance, remodeling, replacements, and other factors can cause a deviation from typical experience. Where the use of the concept of effective age is desirable and/or an overall observed condition is employed, it is recommended that the appraiser refer to the narrative building section definitions and their corresponding percent condition ranges found on Page 22 of the Residential Section.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.