INTRODUCTION: MOBILE/MANUFACTURED HOUSING

GENERAL INTRODUCTION

Factory produced housing are residential structures transported to the building site. There are three generally accepted categories of factory produced housing, each of which has distinguishable characteristics and meet a unique set of criteria: Manufactured, Modular, and Panelized. Because all three types of factory produced housing can resemble site-built housing, the following guidelines should be considered when estimating replacement cost.

DEFINITIONS

A mobile/manufactured house is a residential structure built on a steel undercarriage with the wheel assembly necessary to be transported to a permanent or semi-permanent site. The wheel assembly can be removed when the home is placed on a permanent foundation, but the steel undercarriage remains intact, as a necessary structural component.

A modular/manufactured house can be transported on a steel undercarriage, but the under-carriage is not a permanent and necessary structural component and is usually removed when the unit is placed on a foundation. Modular housing will meet most local building codes and is subject to standard regional or state building codes for modular construction. These houses are not priced from this section; price these houses from the square foot cost pages under single-family detached houses.

Panelized or prefabricated houses consist of packaged, factory-built components and are site assembled. All must conform with local and state or regional building codes for site-built construction. These houses are not priced from this section; price these houses from the square foot cost pages under Single-family detached houses.

QUALITY LEVELS


Mobile/manufactured houses are categorized into six quality levels, low through excellent. Photographs, basic descriptions, and costs are provided for each of these qualities. The higher quality mobile/manufactured houses are similar in both design and appearance to site-built residences as found in tract development. Cost for these types of construction will overlap.

The photographs on the pages which follow are intended to illustrate the general characteristics of this type of housing at a given quality level (i.e., roof overhang, roof pitch, type and quality of materials used, etc.), and are not an indication of typical size, setting, or specific manufacturer.

COSTS

The square foot costs include normal delivery and setup charges within 100 miles of the dealer.

The square foot costs do not include local fees and licenses, appliances, drapes, skirting, patio roofs, carports, or other optional items. These items can be priced separately from the individual cost pages under Adjustments and Additions. Water wells and septic systems can be priced from the Unit-in-Place section. A pricing example is included at the end of this section.

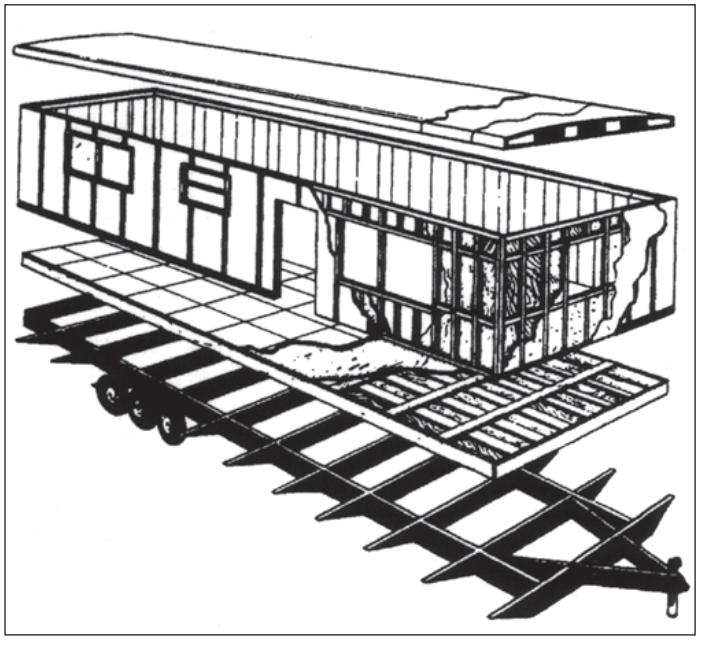

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOW QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Low quality mobile/manufactured houses are designed to meet minimum mobile home code requirements. The overall quality of materials and workmanship is below average. The floor plan is usually simple with little or no attention given to detail.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Exterior finish is prepainted or prefinished lightweight, ribbed aluminum, with exposed fasteners. Minimum fenestration using economy grade windows.

ROOF STRUCTURE: Engineered trusses and sheathing with corrugated or ribbed metal roofing. Roofs are flat or slightly arched with no overhang.

INTERIOR PARTITIONS AND FINISH: Low quality printed hardboard or plywood paneling on 2” x 3” studs. Small wardrobes. Economy grade hollow core doors.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate are included in base costs.

FLOOR FINISH: Inexpensive carpet and pad, vinyl composition tile.

CEILING: Ceiling height is typically 7’ 0” to 7’ 6”.

FOUNDATION: Set up on steel or concrete piers.

FRAME: Light steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced-air heating system with minimal output and ductwork.

ELECTRICAL: Minimum number of electrical outlets. Low-cost lighting fixtures.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Paint grade or vinyl covered particle board kitchen cabinets and bathroom vanity.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

LOW QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length (Feet)	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$84.85	$78.35	$71.85	$67.35	$63.85	$60.85	$87.35	$81.35	$76.85	$73.35	$70.35
	24	82.35	75.85	69.35	64.85	61.35	58.35	81.85	75.85	71.35	67.35	64.35
	28	80.35	73.85	66.85	62.35	58.85	55.85	77.35	71.35	66.35	62.85	59.35
	32	78.85	71.85	65.35	60.85	56.85	53.85	73.85	67.85	62.85	58.85	55.85
	36	77.35	70.35	63.35	58.85	55.35	52.35	70.85	64.85	59.85	55.85	52.60
	40	75.85	69.35	62.35	57.85	53.85	51.10	68.35	61.85	57.35	53.35	49.85
	44	74.85	67.85	60.85	56.35	52.85	49.85	66.35	59.85	54.85	50.85	47.60
	48	73.85	66.85	59.85	55.35	51.85	48.85	64.35	57.85	52.85	48.85	45.60
	52	72.85	65.85	58.85	54.35	50.85	47.85	62.85	55.85	51.10	47.10	43.85
	56	71.85	64.85	57.85	53.35	49.85	46.85	60.85	54.35	49.60	45.60	42.35
	60	71.35	64.35	57.35	52.60	49.10	46.10	59.85	52.85	48.10	44.10	40.85
	64	70.85	63.35	56.35	51.85	48.35	45.35	58.35	51.60	46.85	42.85	39.60
	68	69.85	62.85	55.85	51.35	47.60	44.60	57.35	50.60	45.60	41.60	38.60
	72	69.35	62.35	55.35	50.60	47.10	44.10	55.85	49.35	44.60	40.60	37.60
	76	68.85	61.85	54.35	50.10	46.35	43.35	54.85	48.35	43.60	39.60	36.60
	80	68.35	61.35	53.85	49.35	45.85	42.85	53.85	47.35	42.60	38.85	35.60

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 23% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than ribbed aluminum exterior wall finish, adjust the above costs as follows: hardboard sheet, add 3%; vinyl add 3%; cement fiber sheet add 5%; lap siding, add 6%; cement fiber lap add 7%.

ROOFING: For other than metal, corrugated or ribbed composition shingle, add $0.20 per sq. ft. of floor area.

FLOORS: For other than inexpensive carpet and pad, and vinyl composition tile, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $2.85; resilient floor cover, deduct $0.10; parquet/hardboard, add $7.75

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: wall furnace, deduct $2.33; warm and cooled air, add $2.79; heat pump, add $3.57.

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	200	400	600	800	1000	1200	1600
Concrete walls, 6"	$42.25	$32.50	$28.50	$26.50	$24.65	$23.55	$22.05
8"	45.25	34.75	30.25	28.00	26.00	24.80	23.15
12"	52.00	39.25	34.25	31.25	29.00	27.50	25.50
Concrete Block walls, 6"	38.75	30.00	26.50	24.65	23.05	22.10	20.80
8"	41.25	31.75	28.00	26.00	24.15	23.10	21.65
12"	47.00	36.00	31.50	29.00	26.75	25.50	23.80
Add for finish, minimal	8.55	7.62	7.26	7.06	6.89	6.80	6.67
recreation room	20.75	19.50	17.45	15.55	14.75	14.35	13.70
partitioned	37.50	33.00	31.75	29.50	29.25	28.75	28.25

Outside Entrance: Above grade $1,600.00 Below grade $2,010.00 For radon removal fan & alarm, add $462.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

FRAME			MASONRY	FRAME			MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	71.56	80.37	79.79	800	57.20	62.46	63.24
100	70.86	79.58	79.00	900	55.96	60.88	61.79
200	70.16	78.79	78.20	1000	54.86	59.52	60.53
300	68.78	77.25	76.68	1100	53.89	58.30	59.40
400	65.16	72.57	72.46	1200	53.01	57.20	58.40
500	62.48	69.16	69.35	1300	52.22	56.22	57.48
600	60.38	66.48	66.92	1400	51.50	55.33	56.66
700	58.65	64.30	64.92	1500	50.84	54.51	55.89

Deduct for Slab. $3.46

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class D Site-built Residences, Adjustments and Additions, Page 38.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

FAIR QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Fair quality mobile/manufactured houses are designed to meet minimum mobile home code requirements. The quality of materials and workmanship is below average. The floor plan is usually simple, with a plumbing wet wall on a single outside wall.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Exterior finish is aluminum, vinyl or hardboard lap siding on 2” x 3” or 2” x 4” studs. Adequate fenestration with little ornamentation.

ROOF STRUCTURE: Engineered trusses and sheathing with corrugated or ribbed metal roofing. Roofs are typically arched or sloped with minimal overhang on front elevation.

INTERIOR PARTITIONS AND FINISH: Low quality prefinished plywood paneling or printed hardboard on 2” x 3” or 2” x 4” studs. Small wardrobes. Standard grade, hollow core doors.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate are included in the base costs.

FLOOR FINISH: Inexpensive carpet and pad, vinyl composition tile.

CEILING: Ceiling height is typically 7' 6".

FOUNDATION: Setup on steel or concrete piers.

FRAME: Medium weight steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced-air heating system.

ELECTRICAL: Minimum number of convenience outlets. Low-cost lighting fixtures.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Paint grade or vinyl covered particle board kitchen cabinets and bathroom vanity. Laminated plastic countertops and backsplash.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

FAIR QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length Feet	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$92.87	$85.87	$78.37	$73.87	$69.87	$66.37	$95.87	$89.87	$84.87	$80.87	$77.37
	24	90.37	82.87	75.87	70.87	66.87	63.37	90.37	83.87	78.37	74.37	70.37
	28	87.87	80.87	73.37	68.37	64.37	60.87	85.87	78.87	73.37	69.37	65.37
	32	86.37	78.87	71.37	66.37	62.37	58.87	82.37	75.37	69.37	64.87	61.37
	36	84.87	77.37	69.87	64.87	60.87	57.37	79.37	71.87	66.37	61.87	57.87
	40	83.37	75.87	68.37	63.37	59.37	55.87	76.37	69.37	63.37	58.87	55.37
	44	82.37	74.37	66.87	61.87	57.87	54.87	74.37	66.87	60.87	56.37	52.62
	48	80.87	73.37	65.87	60.87	56.87	53.37	72.37	64.87	58.87	54.37	50.62
	52	79.87	72.37	64.87	59.87	55.87	52.37	70.37	62.87	56.87	52.37	48.62
	56	79.37	71.37	63.87	58.87	54.87	51.37	68.87	60.87	55.37	50.62	46.87
	60	78.37	70.87	62.87	57.87	53.87	50.62	67.37	59.37	53.87	49.12	45.37
	64	77.37	69.87	62.37	57.37	53.12	49.87	65.87	57.87	52.37	47.62	44.12
	68	76.87	69.37	61.37	56.37	52.37	49.12	64.37	56.87	51.12	46.37	42.87
	72	76.37	68.37	60.87	55.87	51.62	48.37	63.37	55.87	49.87	45.37	41.62
	76	75.37	67.87	59.87	54.87	51.12	47.87	62.37	54.37	48.87	44.37	40.62
	80	74.87	67.37	59.37	54.37	50.37	47.12	61.37	53.37	47.87	43.37	39.62

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 20% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than aluminum lap hardboard lap or vinyl siding exterior wall finish, adjust the above costs as follows: ribbed aluminum deduct 3%; cement fiber sheet add 2%; lap siding add 3%; cement fiber lap add 4%.

ROOFING: For other than metal, corrugated or ribbed; composition shingle, add $0.01 per sq. ft. of floor area.

FLOORS: For other than inexpensive carpet and pad, and vinyl composition tile, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $3.37; carpet, add $0.05 resilient floor cover, deduct $0.18; parquet, add $8.93.

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: wall furnace, deduct $2.55; warm and cooled air, add $2.96; heat pump, add $3.79.

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	200	400	600	800	1200	1600	2000
Concrete walls, 6"	$46.25	$35.25	$31.00	$28.75	$25.50	$23.80	$23.20
8"	49.50	37.75	33.00	30.25	26.75	25.00	24.30
12"	56.50	42.50	37.00	33.75	29.50	27.50	26.75
Concrete Block walls, 6"	42.25	32.75	28.75	26.75	23.85	22.45	21.85
8"	45.00	34.50	30.25	28.00	25.00	23.40	22.80
12"	51.00	39.00	34.00	31.25	27.50	25.75	24.90
Add for finish, minimal	10.20	9.12	8.71	8.48	8.20	8.05	7.98
recreation room	23.35	22.10	19.90	17.75	16.50	15.75	15.10
partitioned	42.75	37.75	35.75	33.50	33.25	33.00	32.00

Outside Entrance: Above grade $1,790.00 Below grade $2,380.00 For radon removal fan & alarm, add $496.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

FRAME			MASONRY	FRAME			MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	75.96	85.91	81.63	800	62.27	68.33	66.59
100	75.20	85.04	80.83	900	61.10	66.79	65.30
200	74.46	84.21	80.02	1000	60.06	65.45	64.16
300	73.00	82.55	78.45	1100	59.14	64.25	63.15
400	69.67	78.10	74.77	1200	58.32	63.18	62.24
500	67.20	74.82	72.03	1300	57.56	62.22	61.41
600	65.25	72.22	69.88	1400	56.87	61.34	60.66
700	63.64	70.11	68.10	1500	56.24	60.53	59.97

Deduct for Slab. $3.83

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class CD Site-built Residences, Adjustments and Additions, Page 54.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

AVERAGE QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Average quality mobile/manufactured houses meet or exceed mobile home code requirements. The overall quality of materials and workmanship is average and of standard grade. The front elevation often has some ornamentation.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Exterior finish is aluminum, vinyl or hardboard lap siding on 2” x 4” studs. Adequate fenestration with some trim around aluminum windows.

ROOF STRUCTURE: Engineered trusses and sheathing with corrugated or ribbed metal roofing. Roofs are typically sloped or arched with front overhang.

INTERIOR PARTITIONS AND FINISH: Medium-quality prefinished plywood paneling on 2” x 3” or 2” x 4” studs. Adequate wardrobe closets and storage. Standard grade hollow core doors. Where complete drywalls are encountered, use square foot adjustment.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate is included in the base costs.

FLOOR FINISH: Lightweight carpet and pad, vinyl composition tile.

CEILING: Ceiling height is typically 7’ 6” to 8’ 0”.

FOUNDATION: Setup on steel or concrete piers.

FRAME: Medium weight steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced air heating system.

ELECTRICAL: Ample number of convenience outlets. Some luminous fixtures in the kitchen and bath areas.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Paint grade, vinyl covered particle board or inexpensive wood veneer kitchen cabinets and bathroom vanity. Laminated plastic countertops and backsplash.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

AVERAGE QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length Feet	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$108.00	$100.00	$91.50	$82.50	$78.00	$74.50	$112.00	$104.00	$98.50	$90.00	$86.00
	24	105.00	96.50	88.00	79.50	75.00	71.50	105.00	97.50	91.00	83.00	79.00
	28	102.00	93.50	85.00	77.00	72.50	69.00	100.00	92.00	85.00	78.00	73.50
	32	99.50	91.00	82.50	75.00	70.50	66.50	96.00	87.00	80.50	73.50	69.00
	36	97.50	89.00	80.50	73.00	68.50	65.00	92.00	83.50	76.50	70.00	65.50
	40	95.50	87.00	78.50	71.50	67.00	63.50	89.00	80.00	73.50	66.50	62.50
	44	94.00	85.50	77.00	70.00	65.50	62.00	86.00	77.50	70.50	64.00	59.50
	48	92.50	84.00	75.50	69.00	64.50	60.50	83.50	75.00	68.00	61.50	57.50
	52	91.50	83.00	74.00	68.00	63.50	59.50	81.50	72.50	65.50	59.50	55.50
	56	90.00	81.50	73.00	67.00	62.50	58.50	79.50	70.50	63.50	58.00	53.50
	60	89.00	80.50	72.00	66.00	61.50	57.50	78.00	68.50	62.00	56.00	52.00
	64	88.00	79.50	71.00	65.00	60.50	57.00	76.00	67.00	60.50	54.50	50.50
	68	87.00	78.50	70.00	64.00	59.50	56.00	74.50	65.50	59.00	53.25	49.00
	72	86.50	77.50	69.00	63.50	59.00	55.50	73.00	64.00	57.50	52.00	47.75
	76	85.50	77.00	68.50	62.50	58.50	54.50	72.00	63.00	56.00	50.75	46.75
	80	84.50	76.00	67.50	62.00	57.50	54.00	70.50	61.50	55.00	49.75	45.50

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 18% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than aluminum, hardboard or vinyl siding exterior wall finish, adjust the above costs as follows: ribbed aluminum deduct 3%; cement fiber sheet add 3%; lap siding add 5%; cement fiber lap add 5%.

ROOFING: For other than metal, corrugated or ribbed; composition shingle, deduct $0.26 per sq. ft. of floor area.

FLOORS: For other than lightweight carpet and pad, and vinyl composition tile, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $4.00; carpet, add $0.08; resilient floor cover, deduct $0.30; parquet/hardboard, add $10.30 .

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: wall furnace, deduct $2.80; warm and cooled air, add $3.12; heat pump, add $4.02.

INTERIORS: Drywall interiors add $1.68 per sq. ft. of floor area

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	200	400	800	1200	1600	2000	2400
Concrete walls, 6"	$51.00	$38.75	$31.25	$27.75	$25.75	$25.25	$24.30
8"	54.50	41.25	33.00	29.00	27.00	26.25	25.25
12"	61.50	46.25	36.50	32.00	29.75	28.75	27.50
Concrete Block walls, 6"	46.50	35.75	29.00	26.00	24.30	23.70	23.00
8"	49.50	37.75	30.50	27.00	25.25	24.65	23.90
12"	56.00	42.50	33.75	29.75	27.75	27.00	25.75
Add for finish, minimal	11.90	10.60	9.85	9.52	9.34	9.27	9.14
recreation room	26.75	25.25	20.50	19.05	18.25	17.70	16.90
partitioned	49.25	43.50	38.50	38.00	37.75	36.50	36.50

Outside Entrance: Above grade $2,010.00 Below grade $2,800.00 For radon removal fan & alarm, add $545.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

FRAME			MASONRY	FRAME			MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	85.54	100.58	100.46	800	70.95	80.36	80.36
100	84.69	99.58	99.46	900	69.70	78.60	78.62
200	83.86	98.58	98.48	1000	68.60	77.06	77.08
300	82.22	96.65	96.54	1100	67.64	75.68	75.71
400	78.73	91.56	91.49	1200	66.76	74.46	74.50
500	76.14	87.80	87.75	1300	65.95	73.35	73.38
600	74.08	84.84	84.80	1400	65.22	72.33	72.37
700	72.38	82.41	82.40	1500	64.55	71.40	71.45

Deduct for Slab. $4.25

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class C Site-built Residences, Adjustments and Additions, Page 70.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GOOD QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Good quality mobile/manufactured houses generally exceed the minimum mobile home code requirements. Exterior design and interior finishes will include some detail and ornamentation. Connection seams will be apparent on multi-sectional homes.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: 2” x 4” studs. Exterior finish is hardboard lap siding after hardboard. Ample fenestration with aluminum windows and a sliding glass door.

ROOF STRUCTURE: Engineered truss system, sheathing, and composition shingles. Roof slope is typically 3 in 12 with a minimal overhang.

INTERIOR PARTITIONS AND FINISH: Good quality prefinished plywood paneling, natural wood veneer, or vinyl wall covering on 2” x 4” studs. Large wardrobe closets and ample storage space. Veneered hollow core doors. Where complete drywall interiors are encountered, use square foot adjustment.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate are included in the base costs.

FLOOR FINISH: Good quality, medium weight carpet and vinyl composition tile.

CEILING: Ceiling is typically 8’ 0” high, and where practical, sloped or cathedral with exposed beams.

FOUNDATION: Setup on steel or concrete piers.

FRAME: Rigid steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced-air heating system, with insulated ductwork.

ELECTRICAL: Ample number of convenience outlets. Some fluorescent fixtures in the kitchen and bath areas.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Paint grade, vinyl covered particle board or inexpensive wood veneer kitchen cabinets and bathroom vanity. Laminated plastic or simulated marble countertops and backsplash.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

GOOD QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length Feet	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$132.64	$122.64	$112.64	$105.14	$99.64	$94.64	$137.64	$127.64	$119.64	$112.64	$107.64
	24	128.64	118.64	108.64	101.14	95.64	91.14	130.64	119.64	111.64	105.14	99.64
	28	125.64	114.64	105.14	98.14	92.64	87.64	124.64	113.64	105.64	98.64	93.14
	32	122.64	112.64	102.14	95.14	89.64	85.14	120.64	108.64	100.14	93.64	87.64
	36	119.64	109.64	99.64	93.14	87.64	83.14	115.64	104.64	96.14	89.14	83.14
	40	117.64	107.64	97.64	91.14	85.64	81.14	112.64	101.14	92.14	85.14	79.64
	44	115.64	105.64	95.64	89.14	83.64	79.14	109.64	98.14	89.14	82.14	76.64
	48	114.64	104.14	94.14	87.64	82.14	77.64	106.64	95.14	86.14	79.14	73.64
	52	112.64	102.64	92.64	86.14	80.64	76.14	104.14	92.64	83.64	76.64	71.14
	56	111.64	101.14	91.14	84.64	79.64	75.14	102.14	90.14	81.64	74.64	69.14
	60	109.64	100.14	90.14	83.64	78.14	74.14	100.14	88.14	79.64	72.64	67.14
	64	108.64	99.14	89.14	82.64	77.14	72.64	98.14	86.64	77.64	70.64	65.14
	68	107.64	97.64	88.14	81.64	76.14	71.64	96.64	84.64	76.14	69.14	63.64
	72	106.64	96.64	87.14	80.64	75.14	71.14	94.64	83.14	74.14	67.64	62.14
	76	105.64	95.64	86.14	79.64	74.14	70.14	93.64	81.64	72.64	66.14	60.64
	80	104.64	95.14	85.14	78.64	73.64	69.14	92.14	80.14	71.64	64.64	59.14

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 16% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than hardboard lap siding exterior wall finish, adjust the above costs as follows: ribbed aluminum deduct 3%; plywood with batts add 2%; vinyl add 3%; cement fiber sheet add 3%; lap siding add 4%; cement fiber lap add 5%; log siding add 5%.

ROOFING: For other than composition shingle; metal, corrugated or ribbed; add $1.12; wood shingle, add $1.43 per sq. ft. of floor area.

FLOORS: For other than good-quality, medium-weight carpet, and vinyl composition tile, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $5.64; carpet add $0.16; resilient floor cover, deduct $0.66; parquet/hardboard, add $13.71.

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: warm and cooled air, add $3.49; heat pump, add $4.51.

INTERIORS: Drywall interiors add $1.77 per sq. ft. of floor area

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	200	400	800	1200	1600	2000	2400
Concrete walls, 6"	$62.50	$47.00	$37.50	$33.00	$30.75	$30.00	$28.75
8"	67.00	50.00	39.50	34.75	32.25	31.25	30.00
12"	75.00	55.50	43.75	38.00	35.25	34.00	32.25
Concrete Block walls, 6"	57.50	43.50	35.00	31.00	29.00	28.25	27.25
8"	61.00	45.75	36.75	32.50	30.25	29.50	28.25
12"	68.50	51.00	40.50	35.50	33.00	32.00	30.50
Add for finish, minimal	17.45	15.70	14.65	14.20	13.95	13.90	13.70
recreation room	36.75	35.25	30.25	28.25	27.25	27.00	26.00
partitioned	70.00	62.50	58.50	56.50	56.00	55.00	54.50

Outside Entrance: Above grade $2,575.00 Below grade $3,950.00 For radon removal fan & alarm, add $645.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

FRAME			MASONRY	FRAME			MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	97.76	114.91	106.94	800	84.24	95.71	90.55
100	96.80	113.78	105.88	900	83.14	94.08	89.18
200	95.84	112.65	104.84	1000	82.17	92.65	87.98
300	93.97	110.44	102.77	1100	81.29	91.36	86.90
400	90.99	105.89	99.03	1200	80.52	90.22	85.93
500	88.77	102.51	96.22	1300	79.80	89.16	85.05
600	86.98	99.81	93.98	1400	79.14	88.21	84.23
700	85.50	97.59	92.12	1500	78.54	87.32	83.48

Deduct for Slab. $6.08

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class BC Site-built Residences, Adjustments and Additions, Page 86.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

VERY GOOD QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Very good quality mobile/manufactured houses are typically found in high-quality manufactured housing parks. Exterior finishes and interior refinements resemble those of site-built housing. They exceed minimum requirements of mobile home codes.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: 2” x 4” studs. Exterior finish is plywood with batts or hardboard sheets. Ample fenestration with aluminum or wood sash windows and may have a sliding glass door and an ornamental, recessed entrance.

ROOF STRUCTURE: Engineered truss system, sheathing, and composition shingles. Roof slope is typically 3 in 12 with a moderate overhang.

INTERIOR PARTITIONS AND FINISH: 2” x 4” stud interior walls. Paper or vinyl wall covering, or partial paint and textured drywall or natural wood veneer paneling. Veneer hollow-core doors. Walk in closets or large sliding door wardrobes. Where complete drywall interiors are encountered, use square foot adjustment.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate is included in the base costs.

FLOOR FINISH: High quality, medium weight carpet and vinyl composition tile.

CEILING: Ceiling height is typically 8’ 0”, and where practical, ceiling may be dropped, sloped, or cathedral, and may have exposed beams.

FOUNDATION: Setup on steel or concrete piers.

FRAME: Heavy steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced-air heating system, with insulated ductwork.

ELECTRICAL: Ample number of convenience outlets. Some fluorescent fixtures in the kitchen and bath areas.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Natural wood veneer cabinets and vanities with laminated plastic or simulated marble countertops and backsplash.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

VERY GOOD QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length Feet	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$148.69	$138.69	$127.69	$119.69	$113.69	$107.69	$157.69	$145.69	$135.69	$128.69	$121.69
	24	143.69	133.69	123.69	115.69	108.69	103.19	149.69	136.69	126.69	118.69	112.69
	28	138.69	129.69	119.69	111.69	105.19	99.69	142.69	129.69	119.69	111.69	105.19
	32	135.69	125.69	115.69	107.69	101.69	96.69	137.69	124.69	113.69	105.69	99.19
	36	132.69	122.69	112.69	105.19	99.19	93.69	132.69	119.69	108.69	100.69	94.19
	40	129.69	120.69	110.69	103.19	96.69	91.69	128.69	115.69	104.69	96.69	90.19
	44	127.69	117.69	108.69	100.69	94.69	89.69	125.69	111.69	101.19	93.19	86.19
	48	125.69	115.69	106.69	99.19	92.69	87.69	122.69	108.69	98.19	89.69	83.19
	52	123.69	114.69	104.69	97.19	91.19	86.19	119.69	105.69	95.19	87.19	80.19
	56	121.69	112.69	103.19	95.69	89.69	84.69	116.69	103.19	92.69	84.69	77.69
	60	120.69	110.69	101.69	94.19	88.19	83.19	114.69	100.69	90.19	82.19	75.69
	64	118.69	109.69	100.19	93.19	87.19	82.19	112.69	98.69	88.19	80.19	73.69
	68	117.69	108.69	99.19	91.69	85.69	81.19	110.69	96.69	86.19	78.19	71.69
	72	116.69	106.69	97.69	90.69	84.69	80.19	108.69	94.69	84.69	76.69	70.19
	76	114.69	106.19	96.69	89.69	83.69	79.19	106.69	93.19	82.69	74.69	68.69
	80	113.69	104.69	95.69	88.69	82.69	78.19	105.19	91.69	81.19	73.19	67.19

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 14% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than plywood with batts or hardboard sheets exterior wall finish, adjust the above costs as follows: ribbed aluminum deduct 4%; vinyl add 3%; lap siding add 4%; cement fiber, lap add 5%; log siding add 6%; sandwich panels add 6%; stucco add 7%.

ROOFING: For other than composition shingle; metal, corrugated or ribbed; , add $1.81; wood shingle add $1.29; concrete tile add $5.27; clay tile add $13.35 per sq. ft. of floor area.

FLOORS: For other than high-quality, medium-weight carpet, and vinyl, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $6.69; carpet add $0.22; resilient floor cover, deduct $0.93; ceramic tile add $11.91; hardwood, parquet, add $15.76.

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: warm and cooled air, add $3.68; heat pump, add $4.77.

INTERIORS: Drywall interiors add $0.58 per sq. ft. of floor area

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	200	800	1200	1600	2000	2400	2800
Concrete walls, 6”	$70.50	$41.75	$36.75	$34.25	$33.00	$31.75	$30.75
8”	75.00	44.00	38.50	35.75	34.75	33.00	32.00
12”	82.50	48.25	42.00	38.75	37.50	35.50	34.25
Concrete Block walls, 6”	65.00	38.75	34.50	32.25	31.25	30.00	29.00
8”	68.50	40.75	36.00	33.50	32.50	31.00	30.00
12”	76.00	44.75	39.00	36.25	35.25	33.50	32.25
Add for finish, minimal	19.65	16.85	16.40	16.20	16.10	15.95	15.85
recreation room	41.00	34.75	32.50	31.25	31.25	30.25	29.50
partitioned	73.00	64.50	62.50	61.50	61.50	60.50	60.50

Outside Entrance: Above grade $2,950.00 Below grade $4,775.00 For radon removal fan & alarm, add $710.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

	FRAME		MASONRY		FRAME		MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	108.52	123.96	115.01	800	95.45	106.67	100.02
100	107.43	122.73	113.88	900	94.44	105.26	98.83
200	106.38	121.51	112.76	1000	93.54	104.02	97.77
300	104.28	119.13	110.54	1100	92.74	102.91	96.82
400	101.62	115.33	107.35	1200	92.00	101.91	95.97
500	99.58	112.47	104.93	1300	91.34	100.99	95.19
600	97.95	110.19	102.99	1400	90.74	100.15	94.48
700	96.61	108.28	101.39	1500	90.17	99.37	93.82

Deduct for Slab. $7.07

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class B Site-built Residences, Adjustments and Additions, Page 102.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

EXCELLENT QUALITY

MOBILE/MANUFACTURED HOUSING





GENERAL DESCRIPTION

Excellent quality mobile/manufactured houses are similar in both design and appearance to modular/manufactured houses and to an extent, site-built residences as found in tract development. Costs for these types of construction will overlap. Excellent quality mobile/manufactured houses will exceed minimum requirements of mobile home codes and will often meet, in part, local building codes.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: 2” x 4” or 2” x 6” studs. Exterior finish is plywood with batts or hardboard sheets. Ample fenestration with aluminum or wood sash windows.

ROOF STRUCTURE: Engineered truss system, sheathing, and composition shingles. Roof slope is typically 3 in 12 to 4 in 12 with a minimum overhang of 16”.

INTERIOR PARTITIONS AND FINISH: 2” x 4” stud interior walls. Painted drywall. Paper or vinyl wall covering or natural wood veneer paneling. Veneer hollow-core or raised-panel doors. Walk-in closets or large sliding-door wardrobes.

INSULATION: Floor, wall, and ceiling insulation for an extreme climate is included in the base costs.

FLOOR FINISH: High quality, medium weight carpet and vinyl composition tile.

CEILING: Ceiling height is typically 8’ 0”, and, where practical, ceiling may be dropped, sloped, or cathedral, and may have exposed beams.

FOUNDATION: Setup on steel or concrete piers.

FRAME: Heavy steel beam undercarriage with outriggers and cross members.

FLOOR CONSTRUCTION: Wood floor joists with particle board or plywood decking, waterproofing, and insulation.

HEATING AND AIR CONDITIONING: Forced-air heating system, with insulated ductwork.

ELECTRICAL: Numerous convenience outlets. Some fluorescent fixtures in the kitchen and bath areas.

PLUMBING: Fixtures include lavatory, water closet, bathtub with shower, kitchen sink, and water heater.

BUILT-IN UNITS: Natural wood veneer cabinets and vanities with laminated plastic or simulated marble countertops and backsplash.

BASEMENT: Not included in base costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

EXCELLENT QUALITY

Housing Costs (Per Square Foot of Floor Area)

LENGTH MEASUREMENT DOES NOT INCLUDE TONGUE	Length Feet	Single Wide						Double Wide				
		8	10	12	14	16	18	20	24	28	32	36
	20	$158.93	$148.93	$137.93	$129.93	$122.93	$116.93	$169.93	$155.93	$145.93	$136.93	$129.93
	24	153.93	143.93	132.93	124.93	117.93	112.93	161.93	147.93	136.93	127.93	120.93
	28	149.93	139.93	129.93	120.93	114.93	108.93	154.93	140.93	129.93	120.93	113.93
	32	146.93	136.93	125.93	117.93	111.93	105.93	149.93	135.93	123.93	115.93	107.93
	36	142.93	133.93	122.93	114.93	108.93	103.43	144.93	130.93	119.93	110.93	103.43
	40	140.93	130.93	120.93	112.93	106.43	101.43	140.93	126.93	114.93	106.43	99.43
	44	137.93	128.93	118.93	110.93	104.43	99.43	137.93	122.93	111.93	102.93	95.43
	48	135.93	126.93	116.93	108.93	102.43	97.43	134.93	119.93	108.93	99.43	92.43
	52	134.93	124.93	114.93	107.43	100.93	95.93	131.93	116.93	105.43	96.93	89.43
	56	132.93	122.93	112.93	105.93	99.43	94.43	128.93	113.93	102.93	94.43	86.93
	60	130.93	121.93	111.93	104.43	97.93	92.93	126.93	111.93	100.93	91.93	84.93
	64	129.93	119.93	110.93	102.93	96.93	91.93	124.93	109.93	98.43	89.93	82.93
	68	127.93	118.93	108.93	101.93	95.93	90.43	122.93	107.93	96.43	87.93	80.93
	72	126.93	117.93	107.93	100.43	94.43	89.43	120.93	105.93	94.93	85.93	78.93
	76	125.93	116.93	106.93	99.43	93.43	88.43	119.93	104.43	92.93	84.43	77.43
	80	124.93	114.93	105.93	98.43	92.43	87.93	117.93	102.93	91.43	82.93	75.93

SQUARE FOOT ADJUSTMENTS: % adjustments should be made against base rates before any other adjustments are made.

TRIPLE WIDES: Deduct 12% from the single-wide costs for a tagalong section; use full costs for the double-wide portion.

EXTERIOR FINISH: For other than plywood with batts or hardboard sheets exterior wall finish, adjust the above costs as follows: vinyl add 3%; lap siding add 3%; cement fiber, lap add 4%; log siding add 5%; sandwich panels add 5%; stucco add 6%.

ROOFING: For other than composition shingle; wood shingle or shake, add $1.38; concrete tile add $5.62; clay tile add $15.75 per sq. ft. of floor area.

FLOORS: For other than high-quality, medium-weight carpet and pad, and vinyl composition tile, add or deduct per sq. ft. of covered floor area: wood subfloor only, deduct $7.93; carpet add $0.32; resilient floor cover, deduct $1.24; ceramic tile add $11.47; hardwood, parquet, add $18.07.

HEATING AND COOLING: For deviations from the base of a forced air furnace, add or deduct from the Sq. Ft. costs above as follows: warm and cooled air, add $3.89; heat pump, add $5.05.

BASEMENT

Basement Costs (Per Square Foot of Floor Area)

Wall Type	600	1200	1600	2000	2400	2800	3200
Concrete walls, 6”	$51.50	$41.25	$38.25	$37.00	$35.25	$34.25	$33.25
8”	54.00	43.25	40.00	38.75	36.75	35.50	34.50
12”	59.50	47.00	43.25	41.75	39.50	38.00	37.00
Concrete Block walls, 6”	47.75	38.50	36.00	35.00	33.50	32.50	31.75
8”	50.00	40.25	37.50	36.25	34.75	33.50	32.75
12”	55.00	43.75	40.50	39.25	37.25	36.00	35.00
Add for finish, minimal	21.15	20.15	19.85	19.75	19.55	19.45	19.35
recreation room	42.50	38.75	37.50	37.25	36.25	35.50	35.75
partitioned	76.50	75.00	75.00	74.50	74.50	74.50	74.50

Outside Entrance: Above grade $3,400.00 Below grade $5,750.00 For radon removal fan & alarm, add $800.00

OTHER ADJUSTMENTS

Site-Built Addition Costs (Per Square Foot of Floor Area)

	FRAME		MASONRY		FRAME		MASONRY
Ground Area	Siding	Brick Veneer	Block Walls	Ground Area	Siding	Brick Veneer	Block Walls
50	108.52	123.96	115.01	800	95.45	106.67	100.02
100	107.43	122.73	113.88	900	94.44	105.26	98.83
200	106.38	121.51	112.76	1000	93.54	104.02	97.77
300	104.28	119.13	110.54	1100	92.74	102.91	96.82
400	101.62	115.33	107.35	1200	92.00	101.91	95.97
500	99.58	112.47	104.93	1300	91.34	100.99	95.19
600	97.95	110.19	102.99	1400	90.74	100.15	94.48
700	96.61	108.28	101.39	1500	90.17	99.37	93.82

Deduct for Slab. $7.07

Additional optional items, see Pages 136 - 137.

PORCHES, DECKS, PATIOS AND OTHER ADJUSTMENTS

Please refer to Class A Site-built Residences, Adjustments and Additions, Page 118.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

OPTIONAL ITEMS (IN PLACE)

The following costs may be used to adjust items included in the Basic Mobile/Manufactured Residence Cost or to add for those items which have not been included. For other unit-in-place costs and miscellaneous yard and site improvements, see Unit In Place Section.

Square Foot Adjustments

	Low	Fair	Avg.	Good	Very Good	Exc.
Expandos or Tip-outs:						
Additional living space	42.00	44.00	46.25	51.00	54.00	56.50
Indoor-outdoor carpeting	2.44	2.96	3.48	3.97	4.63	5.29
Storm windows	6.38	7.12	8.00	10.00	11.20	12.50
Drapes	1.03	1.26	1.55	2.33	2.85	3.50
Window blinds	1.37	1.58	1.81	2.37	2.72	3.11
Sprinkler system	3.49	3.83	4.12	4.91	5.35	5.84
CARPORT COSTS:						
(Includes posts and roof only, per sq. ft.)						
Fiberglass	8.23	9.26	10.40	13.20	14.85	16.70
Aluminum	9.76	10.95	12.25	15.35	17.15	19.20
Steel	11.15	12.55	14.10	17.75	19.95	22.45
STORAGE SHED BUILDING COSTS:						
(Cost per sq. ft., excluding permanent foundation)						
Steel	13.25	14.50	15.90	19.00	20.80	22.75
Aluminum	18.50	20.50	22.70	27.75	30.75	34.25
Wood	25.75	29.00	32.50	41.00	46.00	51.50
Awnings						
Metal, fixed	39.00	45.00	52.00	69.00	79.00	91.50
Canvas, fixed	22.55	27.50	33.50	49.50	60.00	73.00
Roll-up	35.75	42.00	49.00	67.00	78.00	91.50
Gutters and downspouts						
Aluminum	8.20	8.54	8.99	9.82	10.25	10.75
Galvanized steel	6.68	7.12	7.56	8.54	9.08	9.67
Fiberglass or vinyl	6.82	7.17	7.51	8.25	8.64	9.08

Linear Foot Adjustments

	Low	Fair	Avg.	Good	Very Good	Exc.
Continuous concrete foundation wall 18”	21.65	22.47	23.29	24.11	24.93	25.75
For each 6” variance from base height	5.78	6.14	6.50	6.85	7.21	7.57
For concrete block foundation, deduct	-0.99	-1.10	-1.21	-1.33	-1.44	-1.55
For treated wood foundation, deduct	-1.55	-1.81	-2.07	-2.33	-2.59	-2.85
42” frost-free footings plus foundation wall	49.78	54.44	57.95	63.36	65.52	67.47
Skirting, 28” height						
Metal or vinyl, vertical	11.05	11.35	11.60	12.20	12.50	12.80
horizontal lap	12.30	13.75	15.30	19.05	21.25	23.70
simulated stone/brick	14.25	15.80	17.55	21.55	23.90	26.50
Plywood/hardboard	11.80	12.40	13.05	14.50	15.25	16.05
horizontal lap	13.40	14.95	16.60	20.55	22.95	25.50
Brick or stone veneer	31.25	34.25	37.75	45.75	50.50	55.50
Concrete block	17.55	19.15	20.90	24.90	27.25	29.75
Precast concrete pan	25.50	26.00	26.75	28.00	28.50	29.25

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MOBILE/MANUFACTURED HOUSING

Lump Sum Adjustments

	Low	Fair	Avg.	Good	Very Good	Exc.
Foundation Piers (each)						
Precast	17.85	26.96	36.07	54.28	63.39	72.50
Formed in place	66.50	72.92	79.33	92.17	98.58	105.00
Steel/concrete buttress	83.00	86.83	90.67	98.33	102.17	106.00
Plumbing						
Average cost per fixture	775	890	1,000	1,280	1,470	1,670
Extra bath, three fixture	2,263	2,602	2,915	3,743	4,264	4,877
Two fixture	1,506	1,734	1,943	2,497	2,843	3,254
Water softener, automatic	1,350	1,461	1,584	1,858	2,008	2,178
Manual	1,226	1,317	1,421	1,656	1,793	1,930
Extra toilet	515	561	613	737	809	880
Extra sink	567	659	763	1,030	1,193	1,389
Separate shower	776	880	998	1,284	1,454	1,650
Bathroom vent	65	72	78	91	104	111
Rough-in	313	322	373	484	550	580
Hot tub, with whirlpool, built-in	2,791	2,993	3,214	3,697	3,971	4,258
Whirlpool tub (Jacuzzi)	3,912	4,192	4,492	5,157	5,523	5,920
Whirlpool tub when it replaces regular bathtub	1,095	1,245	1,415	1,819	2,067	2,341
Tub Enclosure	372	397	483	595	595	645
Entry Steps						
Metal, per step	119	139	159	199	219	239
add for landing	520	543	567	613	637	660
Molded fiberglass, per step	153	183	212	271	301	330
add for landing	540	571	602	663	694	725
Wood, per step	100	116	133	166	182	199
Precast concrete, plain finish						
2 steps	995	1,076	1,157	1,318	1,399	1,480
3 steps	1,330	1,422	1,513	1,697	1,788	1,880
Add 20% for exposed aggregate finish.						
Windows						
Bay	870	960	1,060	1,300	1,430	1,580
Bow	1,290	1,420	1,570	1,910	2,110	2,330
Garden	665	730	805	970	1,070	1,180
Storm Doors	295	334	383	496	565	645
Sliding glass doors						
Single glazed	910	945	980	1,060	1,100	1,150
Double glazed	1,470	1,560	1,650	1,860	1,970	2,090
Triple glazed	1,670	1,760	1,870	2,080	2,200	2,330
Anchors, per assembly	33.00	40.25	49.25	74.00	90.50	111.00
Window air conditioners						
6,000 BTU	1,240	1,240	1,240	1,387	1,423	1,460
12,000 BTU	1,920	1,920	1,920	2,160	2,220	2,280
18,000 BTU	2,340	2,340	2,340	2,647	2,723	2,800
Add 25% to 50% for reverse cycle (heat pump) window or wall unit.						

Lump Sum Adjustments (Continuation)

	Low	Fair	Avg.	Good	Very Good	Exc.
Evaporative coolers						
3,000 CFM	1,140	1,208	1,277	1,413	1,482	1,550
4,500 CFM	1,510	1,578	1,647	1,783	1,852	1,920
5,500 CFM	1,790	1,867	1,943	2,097	2,173	2,250
for roof installation with duct, add	775	775	775	775	775	775
Mirrored wardrobe doors (per pair)	457	491	565	690	770	855
Built-in hutch	825	1,000	1,210	1,790	2,170	2,625
Wet bar (including cabinetry and plumbing)	1,760	1,990	2,260	2,900	3,300	3,725
Appliances						
Appliance Allowance (if not itemized)	2,130	2,775	3,175	4,575	5,300	7,450
Range and oven	1,050	1,210	1,380	1,830	2,100	2,420
with self-cleaning oven	993	1,201	1,369	1,650	1,778	1,892
Microwave combo	2,600	2,800	3,000	3,450	3,700	3,975
Range hood & fan	236	295	373	595	745	945
unvented	148	215	288	436	510	584
Range top	540	680	860	1,360	1,720	2,170
Oven	945	1,120	1,340	1,900	2,270	2,700
Microwave combo	1,420	1,590	1,770	2,210	2,460	2,750
Microwave oven	194	298	401	608	712	815
Dishwasher	452	548	645	1,193	1,741	1,030
Garbage disposer	160	187	214	269	296	323
Bath heater/vent fan	149	177	205	260	288	316
without fan	67	94	121	168	188	215
Trash compactor	650	698	745	840	888	935
Refrigerator, freestanding	680	942	1,203	1,727	1,988	2,250
Freezer	680	942	1,203	1,727	1,988	2,250
Clothes washer	725	796	867	1,008	1,079	1,150
Clothes dryer	640	695	750	860	915	970
Combination Unit	1,400	1,560	1,720	2,040	2,200	2,360
Ceiling fans	206	250	325	438	565	690
Fireplaces or wood-burning stoves						
Prefabricated	765	830	900	1,050	1,130	1,230
Pref. w/ imitation stone or brick hearth	2,775	3,125	3,500	4,425	4,975	5,600
Decorative fireplace, electric	760	838	917	1,073	1,152	1,230
Hitches	126	138	152	183	201	221

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

DEPRECIATION TABLE FOR MOBILE HOMES

Age	Remaining Condition		
	Low/Fair Quality	Average/Good Quality	Very Good/Excellent Quality
1	96	97	98
2	93	94	96
3	90	92	93
4	87	89	92
5	85	87	90
6	82	85	88
7	79	83	87
8	76	80	85
9	74	78	83
10	71	76	82
11	69	74	80
12	67	72	79
13	64	70	77
14	61	68	75
15	58	65	73
16	56	63	72
17	54	61	70
18	51	59	69
19	48	57	68
20	46	55	66
21	43	53	64
22	41	51	62
23	38	49	61
24	36	47	60
25	35	44	58
26		42	57
27		40	55
28		38	54
29		36	52
30		35	50
31			49
32			48
33			46
34			45
35			43
36			42
37			40

Age = Tax Year minus date of construction
Example: A 2024 assessment is being figured for a building constructed in 2004. The age is 20 years.

Exceptional maintenance, remodeling, replacements and additions must be recognized in adjusting the % condition from that listed in this table to the actual observed condition. Exceptionally poor maintenance is also to be recognized. Estimates of value based on the cost approach should be constantly checked by comparison to sales of similar properties.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Located in Ingham County Assessment Year 2014 1 SPACE = 5' Pricing Exampl

| | | |

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.