INTRODUCTION TO THE SEGREGATED COST METHOD

The Segregated Cost Method is designed to enable the assessor to give separate consideration to all of the major construction assemblies or systems (components) of a building to arrive at a reliable replacement cost in a reasonably short time.

The costs of many parts of a building, such as floor, ceiling and lighting, change directly as the floor area of the building increases. Other building costs vary with relation to parameters other than floor area; however, most costs can be related to floor area, wall area, roof area or sometimes an individual count of unit installations. To facilitate the application of these individualized costs, they are grouped so that all costs related to floor area can be added together and applied to the total floor area. All wall area costs can be added together and applied to the wall area and all roof costs applied to the ground floor or roofed area.

A breakdown of the components whose costs correspond to the major areas follows:

FLOOR AREA

Site Preparation	Floor Cover	Sprinklers
Foundation	Ceiling	Electrical
Frame	Interior Construction	Heating, Cooling and
Floor Structure	Plumbing	Ventilating

OUTSIDE WALL

Wall Cover	Wall Ornamentation	Storefronts

ROOF

Roof Structure	Roof Trusses	Roof Cover

A separate section is included for buildings in each of six major cost-related groups, classified by type of occupancy. The only additional data required are Architects' Fees, Appendix C and County Multipliers, Appendix D. By separating the costs into major occupancy groups, many of the factors which cause variations in costs are automatically considered, thus eliminating the necessity for detailed consideration of each component. For each component of the building, a range of costs representing a typical spread between low and high costs for that component within the occupancy group is given. The costs in this range are subdivided into four groups whose midpoints are generally defined as follows:

COST RANGE RATING

1	2	3	4
Low	Average	Good	Excellent

The component costs of most buildings will fall within Columns 2 and 3. Columns 1 and 4, while representing the low and high ranges in normally encountered construction costs, do not represent the highest or lowest costs that may be encountered. (A more detailed discussion of the rating numbers follows).

While it is true that a number of factors influence the cost of each component, buildings are fairly consistent in their quality throughout. Therefore, after the overall quality and cost level of the building are established in relation to the group and class (i.e., an average Class A Hospital would not receive the same rating as an average Class C Office building, or a 400,000-square-foot Warehouse the same rating as a 4,000-square-foot facility, etc.) and the general rating is selected, that column is often appropriate for many of the Segregated Cost components. Exceptions may be those components such as insulation, wall sheathing, heating and cooling and foundations, which can be directly affected by climate. For typical buildings, the pr cedure is:

1. Select the section best describing the occupancy of the building as it was designed.
2. Generally classify the building as to cost level by overall quality and complexity or size for that occupancy as: low cost, average, above average or high cost.
3. Systematically describe each of the major components in order, considering whether that component is consistent with the general cost level of the building as a whole and with the occupancy in that section and its commonality and enter the appropriate cost.
4. Total the unit costs belonging to each of the major area groups: total floor area, exterior wall area, wall ornamentation and roof area and multiply each total by its area.
5. The sum of these amounts, modified by the multipliers for the number of stories, architects' fees, current cost and locality, plus any lump-sum additions for miscellaneous items, will be the total replacement or reproduction cost.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Example: One-story industrial building:

1. The building is occupied as an industrial, so Section SEG 4 is selected.
2. The general quality and design are average.

COST RATING RANGE

	1	2	3	4
	Low Cost	Average cost	Above Avg. Cost	High Cost

3. $ Foundation unit cost
   \+ Frame unit cost
   \+ Floor unit cost
   \+ Electrical unit cost

4. $ Total of floor area x Floor area = $ Floor area cost
   unit costs* (5000 sq. ft.)
   $ Wall unit cost x Wall area = $ Wall cost
   (3600 sq. ft.)
   $ Roof structure unit cost
   $ Roof cover unit cost

5. $ Total of roof unit X Ground floor area = $ Roof Cost
   (5000 sq. ft.)

Floor Area Cost + Wall Cost + Roof Cost = Total Preliminary Cost

6. The total preliminary cost, including wall ornamentation, modified by the multipliers for the number of stories, where applicable, architects' fees, current cost and locality, plus lump-sum costs for miscellaneous items, will give the total replacement cost.

*Most buildings will have more components under Floor Area Unit Costs, but the example above demonstrates the simplicity of the procedure.

ACCURATE SELECTION OF COSTS depends upon first determining the occupancy and thus selecting the proper section. If the classification of a building falls between two types, then its cost will also be between wo costs. If construction of two types is similar, then the costs will be relatively similar and a choice of one over the other will not greatly affect your final answer.

In the event of mixed occupancies such as apartments over stores, the area in each occupancy should be priced from its respective Segregated Cost Section. Occasionally a small portion of a building's space will comprise a different occupancy; instead of dividing the building into sections, it may be desirable to price separately only the one or two construction components that may differ and to weigh in these costs with the unit costs of the main occupancy.

Some structures, such as grandstands and bleachers, and prefabricated metal buildings, lend themselves to special pricing procedures and should be priced from Sections UIP 11 through 14.

BASEMENTS, MEZZANINES, PORCHES AND ATTICS are priced by their segregated construction components, such as floors, ceilings, etc., from the appropriate tables used for the main part of the building. Stepped balcony structures are listed separately. If basements have interior construction similar to the floors above, the regular interior construction tables may be used, usually with a lower rating. If there are only a few partitions, it would be best to price them from Section UIP 2 on the basis of square footage of partition area.

SIZE AND SHAPE MULTIPLIERS are not used in the Segregated Cost Method since the exterior walls, which contribute the most to the variation in cost due to size and shape, are measured and priced separately. The main addition in cost due to additional height is taken care of by additional exterior wall area. There are, however, other building components which are affected to some degree by height. The frame, interior construction and some other costs are priced for standard heights, with a suggestion to change the given cost by a certain percentage for deviation from the standard. All other costs which might vary slightly with increased height are not reduced to any specific height, but are averages for the typical height of that occupancy and group. If, in the assessor's judgment, costs would be abnormal due to a height that is significantly greater or less than normal for a building of that occupancy, the assessor should choose an appropriately higher or lower rating for this component, or modify the basic cost up or down, according to their judgment. Modifiers are also given for high rise buildings to correct foundation and frame costs for deviation caused by the number of stories. The cost data in this manual are averages of actual costs, but it is necessary to select the proper cost and to recognize when the given cost must be modified up or down or a new cost developed. There may be economies of scale not recognized by the cost schedules when pricing very large buildings. The user is cautioned that large buildings frequently include cost items easily overlooked, such as special plumbing and electrical, power wiring, air lines, craneways, etc. Large buildings are frequently built to house a particular operation and include real property costs required by that operation which should not be overlooked.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COST RATING NUMBERS

EXCAVATION AND SITE PREPARATION includes bulk excavation, clearing and site grading, but does not include demolition or trenching for the foundation or footings. Fill is soil brought to the building site to change the topography, i.e., dock height floors, or to alter the structural strength of the on-site soil. The costs apply only to the area under the structure, but when needed, can be applied to the entire building site.

FOUNDATION includes all concrete, treated wood or masonry piers, footings or pads which support posts or columns, and continuous footings or foundation walls. Basement walls are not a part of the foundation. Also included in the foundation cost are costs for trenching, excavating and backfill for the footings. Certain occupancy sections include buildings such as stores and industrials, which vary widely in the ratio of perimeter to floor area (in square feet). In these cases, alternate sets of tables are provided: Table I is for buildings in which the foundation can be closely related to floor area, such as a fully framed multi-story, or occupancies such as apartments, houses, hospitals, etc., with a high proportion of interior construction. Table II is for buildings where the foundation can be more closely related to the perimeter, such as shell-type structures: stores, markets, warehouses, auditoriums, etc. Table III is for use with Table II to obtain the cost of column footings where needed. Pilings or special foundations should be priced from Section UIP 1. When basement walls replace part of the foundation, a lower cost classification may be considered.

FRAME includes posts, columns, beams, girders, sills, underpinning and bracing. The amount of frame may range from that of a fully framed Class A building to that of a building with bearing walls with slab floor and roof joists spanning from wall to wall. In the latter case there would be no frame members. Some buildings with bearing walls have partial frames. In these cases, a percentage of the cost should be used. For example, in a building with bearing exterior walls and one row of posts down the center supporting the girders for the roof or floor above, 2/3 of the vertical and horizontal supports would be eliminated. Assuming the horizontal and vertical members to be approximately the same weight (which is not always the case), the frame percentage would be (1/3 x 1/2) + (1/3 x 1/2) + 1/3 or 33% of the full-frame cost. This percentage would change under different conditions, so the assessor must consider the actual frame members and estimate the percentage of frame cost to use when part of the load is supported by frame members and part by bearing walls.

Guides to the development of these percentages are listed in Section UIP 1. Pilasters and bond beams, although performing some of the functions of a frame, should be priced with the exterior walls as “bearing walls”. The easiest guide to when a column is a pilaster is when the column and its supported structure built before the wall (framed structure), or was the wall erected first (as in some tilt-up), or at the same time (masonry with pilasters). Another criteria is whether or not the supported structure would stand safely without the wall. In between these types are the partially framed structures.

In wood frame buildings such as Class D residences, the “framing” for walls, roof and floor is provided for under the costs given for each heading. The only members to be priced under “Frame” would be the girders and posts supporting a raised floor structure, whose cost is given as “Bearing Walls, wood or steel floor supports only”. If this building has a concrete slab floor, normally there would be no frame cost. In buildings that have a large number of frame members of uniform size and spacing, which are visible and easy to count and measure, the frame cost may be priced quite rapidly and accurately from Section UIP 1.

FLOOR STRUCTURE costs, including costs for mezzanine and balcony structure, allow for the joists and subfloor or decking. Stepped balcony structures are listed separately. Finished wood flooring should be priced with floor cover, even if there is no subfloor. In this case, the structure cost would be taken from “Wood joists and bridging only”. The costs for concrete floors on ground include allowance for reinforcing. Vapor barriers and insulation are listed separately as additives.

FLOOR COVER costs are given for softwood and hardwood as well as for resilient floor coverings and other types.

CEILING costs do not include the supporting structure, since in many cases the ceiling is attached to the structure of the floor or roof above. Ceiling joists are priced with the roof structure. In buildings where ceiling joists are required, but are not a part of a roof or floor structure, the indicated additional cost allowance for ceiling structure or suspended ceilings must be made. Insulation is an additive.

INTERIOR CONSTRUCTION costs cover basic costs of such items as partitions, doors, stairs, closets, cabinetwork, etc. In occupancies such as apartments and offices, the cost is uniformly related to area, and can be determined quite accurately on the basis of square footage of floor area. In other occupancies, such as stores, industrials and sheds, which have a large total area with very little partitioning, a more accurate answer may be obtained by measuring the amount of partitioning and pricing on the basis of square footage of partition area from Table II of the Interior Construction tables or from Sections UIP 2 or UIP 5, adding for other interior items. Interior construction requires more judgment than most other items, since it covers more types of construction problems. Special building construction other than those indicated should be either separately priced or noted in the valuation as not being included.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

PLUMBING costs include the complete plumbing installation, rough and finished and associated structural allowances. Supply and waste lines are included to the property line of a normal building lot. Industrial piping between equipment used in the man facturing process is not included. If sewer or water lines to the property line on large lots are to be included, price from Sections UIP 3 or UIP 12. Additions must be made to the base plumbing cost for a well and septic system when present.

Costs can be figured accurately on the basis of square foot of floor area for occupancies where there is an even distribution of plumbing fixtures, as in offices, hotels and apartments and other housing. In the case of industrial buildings, where there may be two toilets and two lavatories in a 1,000 or 10,000 square-foot building, the fixtures often should be priced individually rather than on square foot of floor area.

SPRINKLER costs include all the costs for the system and supply lines, but not tanks, towers or high-pressure pumps. The areas are based on the total area of sprinkler system installation on a single main connection.

HEATING, COOLING AND VENTILATING costs include the basic heating units: boilers, pumps, oil or gas burners, cooling towers, piping and ducts, registers, operating motors and fans. In the case of ground water heat pumps, the cost of the ground loop heat source does not include the well. In selecting the cost classification the climate must also be considered. The availability of fuel common to the region will also have a bearing on the cost rating chosen.

ELECTRICAL AND LIGHTING costs allow for the service distribution, fixtures and receptacles for the lighting, and convenience outlets, but do not include the cost of power wiring for industrial equipment. Built in kitchen or bathroom electrical appliances are not included.

EXTERIOR WALL costs allow for the complete exterior wall including sashes and doors, interior and exterior finishes where applicable, and interior and exterior wall covering where applicable. The exception is that major exterior ornamentation is added as a separate item. Insulation, sheathing, infiltration wrap, etc. are listed as additives

The costs are grouped into five major categories according to basic wall structure: concrete or masonry bearing or non-bearing walls, non-bearing curtain, pre-engineered and single wall construction and bearing wood or steel stud walls. Basement walls are listed separately. The cost difference between bearing and nonbearing “concrete or masonry walls” has generally been found to be insignificant. Therefore, only one set of costs is generally listed for “concrete or masonry walls”.

Pilasters and bond beams, although performing some of the functions of frame members, are priced with the exterior bearing wall. If curtain wall costs are used, there must be a frame cost.

Where the cost tables show a thickness dimension for a wall, that dimension is for the total wall. Therefore, Brick, block backup, 12”, is a wall consisting of an 8” concrete block plus a 4” brick.

The exterior wall costs are multiplied by the total area of the exterior wall, rather than by the floor area.

EXTERIOR BALCONY AND STAIR costs allow for the complete structure, including any supports.

WALL ORNAMENTATION costs are for any special exterior wall treatments generally found around entrances and front elevations. Costs are for the major ornamental veneer facing only and are not a complete wall cost. Consideration may have to be given to the wall behind the ornamental facing since it may not take the same cost rating as the balance of the surrounding wall.

ROOF costs are divided into three parts: roof structure, roof cover, and trusses and girders.

Roof structure includes joists, rafters, purlins and sheathing or deck, together with necessary bracing and ties. Trusses may be substituted for rafters (joists).

Roof cover includes the roofing and necessary roof flashing, gravel stops, gutters, skylights, etc., with an additive cost for roof insulation.

Trusses and girders include necessary ties, gussets and bed plates. Light trusses are not included. When frame costs are used; girders are usually included as the horizontal members of the frame, and it would be extremely rare to use a truss or girder cost. In certain cases, a low frame cost (Rating 1) could be used to account for just the vertical portions and then the appropriate truss or space frame cost could be priced separately.

MISCELLANEOUS costs include items which are not included in the building segregations (i.e., fireplaces, built-in appliances, etc.) and should be added when found in certain occupancies. In addition to these costs, other miscellaneous items are included in Sections UIP 1 through UIP 15.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COST RATING NUMBERS

Following are some of the items affecting the cost range for each of the major segregated components. The costs listed are neither the highest nor the lowest which are found, but represent typical or normal costs within each rating class. Definitions of some individual segregated components can be found in the Glossary.

EXCAVATION costs vary according to type of soil, accessibility of the site, and length of the haul for disposal. If the excavation is soil which is easy to dig with standard equipment, if the site is such that there is ample room for the equipment to operate and if the dirt can be wasted on the site, Rating 1 should be used. If there are aspects that make the digging more difficult, such as harder soil or longer hauls for disposal, Rating 2 or 3 should be used. If there are difficult conditions, such as very hard soil or rock, or perhaps sandy soil which requires much shoring, Rating 4 costs should be used. The cost range for fill depends on the problems involved in compacting. For long hauls, the additional cost for a radius of over 2 miles must be added.

Site preparation or grading is the work of preparing a level site and may include weed clearing, stump pulling and incidental grading, where cost variations depend on the terrain and vegetation.

FOUNDATION costs are affected mainly by the load supported. The dead load, which is the weight of the building itself, is affected by the type of frame and exterior walls. The live load depends on the weight imposed by the occupancy. If the building site is not level but slopes enough so that stepped footings are required, more concrete would be needed for the foundation. An average department store will normally have a heavier foundation than an average retail store, etc.

FRAME costs are influenced by loads, which in turn determine the size and spacing of frame members. Where the frame me bers are visible, the frame cost can be determined from Section UIP 1 and may be used as a guide to future cost selection. Poor soil and heavy wind possibilities in some areas may increase design loads. In single story buildings where the frame supports only a light roof, Rating 1 might often be chosen, even in average buildings.

Added weight of frame to support multistory buildings is taken care of by the use of the multistory modifier.

FLOOR STRUCTURE costs are also primarily affected by the load requirements. In many buildings the size and spacing of the joists and beams, and the thickness of the slab or sheathing can be observed. Usually the floor structure would be commens rate with the general occupancy, and with the cost level of the building. Vapor barrier costs vary primarily by the thickness of the fill.

FLOOR COVER costs vary by quality, color, grade, material composition and thickness of the cover. Resilient and ceramic tile floor covers are sometimes patterned rather than plain, solid colored throughout rather than embossed, in which case their cost per square foot is increased. Frequently, resilient floor covering has a matching coved base, which adds to the square foot cost, particularly if the building is divided into small rooms. The type of underlayment is also a cost consideration.

CEILING cost variations are influenced by thickness, quality and in the case of ornamented ceilings, the type of ornamentation, the intricacy of the design and the finish. Acoustical ceiling costs vary with the material, method of attachment, type of suspension and supporting structure.

INTERIOR CONSTRUCTION cost variations depend on the amount of the interior partitioning and its quality, the number of interior doors, the quality of the hardware and the amount and quality of the cabinetwork and other built-in features. The painting and the quality and amount of wallpaper, wood paneling, etc., have a considerable effect on the interior construction cost. The quality of the interior partitions, of the cabinetwork and of decorating is usually commensurate with the general quality of the building. In occupancies that might have a wide variation in room size, some consideration should be given to the amount of partitioning.

PLUMBING costs should be based mainly on the quality of fixtures if cost per fixture is used. If the cost per square foot is used, the number of fixtures and quality of fixtures in relationship to the occupancy must be considered. Industrial buildings, milk processing plants, etc.; often have a great deal of plumbing costs in drains, grease traps and long pipe runs, all of which should be considered. If desired, Unit-in-Place costs may be used for greater detail. The costs of coated steel, fiberglass and cast iron fixtures ascend in that order.

SPRINKLER rating numbers from 1 to 4 represent all types from exposed wet to concealed dry sprinkler systems. Most wet types will fit in Ratings 1 and 3 and dry systems in Ratings 2 and 4. There is an overlap in the costs of the various systems.

The following is a general guide:

Column 1 Rate: Wet pipe, without ceiling
Column 2 Rate: Dry pipe, without ceiling
Column 3 Rate: Wet pipe, with ceiling
Column 4 Rate: Dry pipe, with ceiling

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HEATING, COOLING AND VENTILATING costs are primarily dependent on the climate and the building insulation which affect the capacity of the central unit. The complexity and number of outlets also affect the cost. Air conditioning costs, in addition, are dependent somewhat on prevailing humidity for atmospheric conditions. The major costs in heating and cooling are the number of controlled areas and the type of wall and insulation, as well as the personnel density and the amount of traffic in and out of the building. In selecting a proper cost for basement heating, it is important to remember that a minimal number of outlets could be incidental to the overall cost of the system. The heating costs in this manual have been adjusted to Michigan's climate. Therefore, column 2 costs are those typical of Michigan's average heating requirements.

ELECTRICAL AND LIGHTING facilities are rated according to the quality of the fixtures, number of outlets and type of wiring.

EXTERIOR WALL costs often represent a considerable percentage of the total building cost. The choice of the rating column to use depends mainly on the type and quality of the interior and exterior facing and finish, and on the amount and quality of the openings. Generally, the more openings there are, the more costly the wall.

ROOF cost variations are affected by the size and spacing of the structural members, the thickness and quality of the sheathing, and the thickness, quality and shingle exposure of the cover. The type and number of ancillary items, e.g., gutters, skylights and miscellaneous roof protrusions should be considered. Since the roof is priced on the basis of ground floor area, the steepness, the amount of overhang and the shape and complexity of the roof are also cost considerations. Very large overhangs may be computed separately.

INSULATION costs, listed as Segregated component additives, vary by quality and thickness of the material, and are primarily dependent on the climate. Michigan's climate has been recognized in the cost schedules in this manual.

EXAMPLE

The following example, filled-in field form, and discussion demonstrate a reproduction cost estimate of a good-quality, Class B office and apartment building. The building consists of a full basement, offices on the main floor and four floors of apartments above, with two standard apartment house elevators and built-in appliances in all apartments. Figure 6 shows the filled-in field form used to arrive at the reproduction cost of the subject building. The information necessary to identify the building and generally classify it is entered on the first five lines. This building is a good Class B five-story office and apartment building with a full basement. Since the building has mixed occupancy, its area is broken down into sections. Section I is basement, Section II is office area, and Section III is apartments. The office portion is priced from Section SEG 5, and the apartments from Section SEG 1. There is no separate section to price basements, so the basement portion could actually be priced from Section SEG 5 or Section SEG 1, whichever appears more suitable; however Section SEG 5 is used in this example.

The basement excavation is 13 feet deep. The soil is average. Part of the soil could be disposed of on the site with only a short haul required for the rest, so Rating 2 is used. The $.46 for excavation under Column 2, SEG 5, PAGE 1, is multiplied by the 13-foot depth to get $5.98 for the cost per square foot of basement area. This amount is entered opposite "Excavation, Site Preparation" under Section I.

The foundation, as indicated in Figure 5, is reinforced concrete. Unless there is some unusual load requirement, Column 2 foundation rates are appropriate. Actually, the same foundation supports the office and apartments. Other portions of the building are also similar in both occupancies. The suggested procedure, however, is generally to price, from the same occupancy page, all of the components to be entered in the corresponding column under "Unit Costs." Thus the $3.76 from SEG 5, PAGE 1, Rating 2 for Class B, is modified for number of stories (deduct .8% x 4 floors) and story height (add 2%), and the resulting answer, $3.71, is entered under Section I. It is then modified for the first floor story height and the number of stories, and the resulting answer, $3.64, is entered under Section II. From SEG 1, PAGE 1, the cost of $3.56, Rating 2, Class B, is modified for the number of stories and the average story height, leaving the answer, $3.52 entered in Section III.

The frame is Class B, reinforced concrete. In the example, Rating 3 is used for all sections of the building, each modified by the average story height modifier for the occupancy and by the multistory modifier. Thus the base for both Sections I and II is $21.30 from SEG 5, PAGE 1 and after modification the Section I entry is $23.69 and Section II, $23.00. The base for Section III from SEG 1, PAGE 1 is $18.35 and the entry is $20.03. The floor structure is concrete slab on ground for the basement and is waterproofed. Rating 3 was used from SEG 5, PAGE 1 and $5.88 for slab plus $ 1.44 for vapor barrier or a total of $7.32 entered for Section I.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

For the upper floors, the concrete elevated slab floors from SEG 5, PAGE 1 and SEG 1, PAGE 2 with Rating 2 were used, giving $14.80 and $14.20 for Sections II and III respectively. The floor covering is vinyl composition tile throughout the first floor and 25% vinyl composition and 75% carpet on the upper floors. The basement floor was treated with hardener and sealer, Rating 3, at $1.63 (SEG 5, PAGE 2). From Rating 3, SEG 5, PAGE 2 we get $3.61 for Section II and from Rating 3, SEG 1, PAGE 2, 25% of $3.48 plus 75% of $6.26 or $5.57 for Section III.

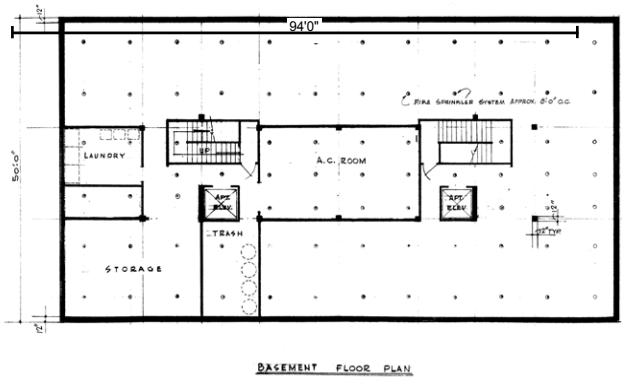


FIGURE 1

The basement ceiling was unfinished. The first floor ceiling was fiberglass acoustic tile on a suspended T-bar frame which we priced from SEG 5, PAGE 2, Rating 2, $2.54 plus $1.89 equals $4.43 for Section II. The apartments had a standard plaster ceiling on metal lath, with metal furring on suspended runners, which we priced from SEG 1, PAGE 3, Rating 2, at $4.10 + $.57 + $1.85 + $1.70 or $8.22 for Section III.

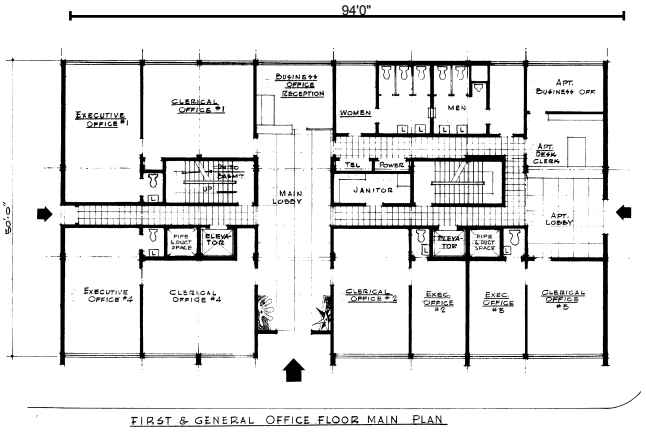


FIGURE 2

Since the basement was only partially partitioned, the interior costs were computed from Section UIP 2 of the manual and a reference made in Section I of the form. The first floor partitions were masonry, and from Rating 3 of SEG 5, PAGE 3, we selected the cost of $49.25 and entered it under Section II. The apartments had 50% frame and 50% masonry partitions, so from SEG 1, PAGE 4 we selected 50% of $22.45 (Rating 2 for average apartment size of four rooms) plus 50% of $25.25 for a total of $23.85 which, when modified for story height, gives the cost to enter in Section III of $24.80 ($23.85 x 1.04 Height Adjustment).

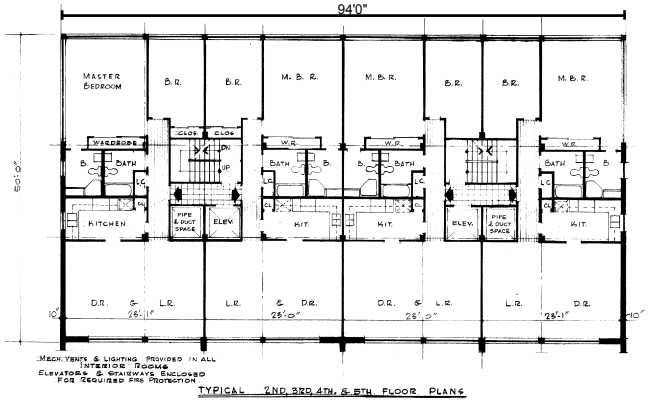


FIGURE 3

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

The square foot figures for plumbing were used in this example. The office area has more fixtures than the average, although of average quality; a rating between 2 and 3 is used, giving a cost of $6.97 from SEG 5, PAGE 4 for Section II. The cost for a fourroom, two-bath apartment, Rating 3, gives a cost of $11.60 from SEG 1, PAGE 4 for Section III. The basement had automatic washers and dryers and the central hot water heater. The washers and dryers were not considered part of the building for this example, and the rough plumbing and hot water system are considered to be taken care of in the square foot costs of the upper stories. There was an exposed wet type sprinkler system in the basement, for which the cost from SEG 5, PAGE 3, was $3.34.

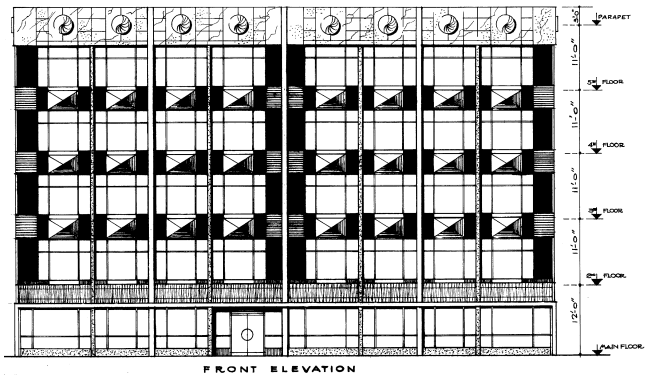


FIGURE 4

There is a combined hot and chilled water heating and air conditioning unit. Assuming that there is an average number of zone controls, Rating 2 is used for these costs. No heating was figured for the basement, although there may be an outlet or two.

These costs are modified for story height. The electrical wiring is in rigid conduit and there is an above average number of outlets and good quality fixtures on the finished floors so $4.76 (Rating 3 for the unfinished basement areas) and $27.50 from SEG 5, PAGE 4 and $12.89 from SEG 1, PAGE 5 are entered.

The exterior walls are porcelainized metal, prefabricated, curtain walls which are taken from Rating 3, “Metal and Glass panels (ordinary).” The granite trim at the top of the front and two sides of the building is listed as wall ornamentation and taken from Rating 2, SEG 1, PAGE 7. Strictly speaking, the wall behind the granite facing would not take the same cost as the balance of the wall, but this extra refinement is omitted for the example. The basement wall is reinforced concrete and is waterproofed. From SEG 5, PAGE 6, Rating 2, the cost is $20.95 plus $ 1.31, or $22.26. The roof is a two-way flat slab system. In SEG 1, PAGE 8, Rating 2 gives $12.85 after the general heading “Concrete joists, slab.” The roof covering is a good-quality built-up roof with good insulation, so under Rating 3, we find $2.93 plus $2.12 equals $5.05.

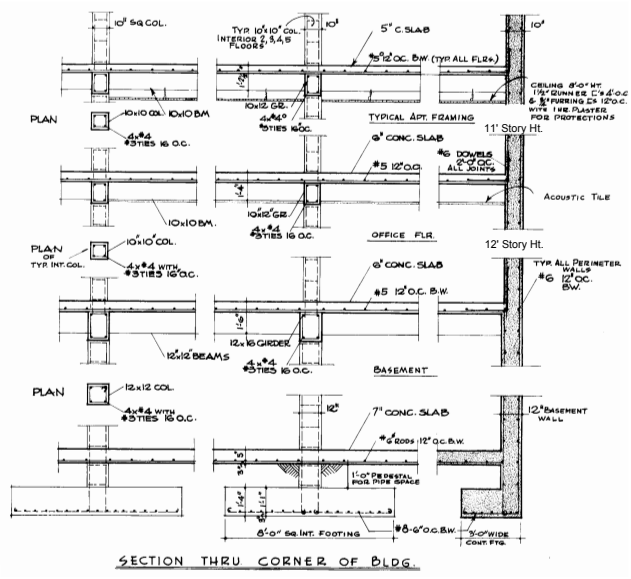


FIGURE 5

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LUMP SUM ADDITIONS – The basement partitions were computed from Section UIP 2, PAGE 1 for unfinished 6" clay tile, and the steps for the basement from Rating 2, concrete stairs, under Exterior, Basement and Tower Stairs, SEG 5, PAGE 6, 22 risers in 13', are $270.00. Other stairs are included in the interior costs of the upper floors. Any costs taken from other sections should also be modified by the County Multiplier and by the architects' fee. The elevators were priced from Section UIP 7, and the built-in appliances, Rating 2, from SEG 1, PAGE 9 to complete the pricing.

COMPLETION OF THE FORM – The figures in each column on Lines 1 through 11 are added and the totals of $50.43, $156.10 and $118.08 are placed on Lines 12 and 17, for the floor area unit costs of the basement, office, and apartments, respectively. Similarly the costs on Line 40 are transferred to Lines 18 and 19, and the Roof Costs, Lines 13 through 15, are totaled on Line 16 and transferred to Line 20. The floor areas are computed on the back of the form and placed in the boxes under Final Calculations on Line 17. The perimeter is 288 linear feet, which, when multiplied by the respective wall heights, gives the wall areas for Line 18. Since the minimum parapet was negligible in this case, it was not considered. The actual ornamented area of 1,164 square feet is placed on Line 19. On Line 20 the roofed area, 4,700 square feet is entered. After multiplication of these areas by their respective total unit costs, the products in column are added, and the subtotal for each section is entered on Line 21. Where required for multistory buildings, the number of stories multiplier for all the aboveground sections of the building is entered on Line 22. In the example there are five stories above ground. Adding .25% for each story over three results in a number of stories multiplier of 1.005 (1 + .005), which is entered on Line 22 for Sections II and III. No number of stories multiplier is entered on Line 22 for Section I, since this portion of the building is not above ground. The products of the multiplication of the section subtotals on Line 21 and the number of stories multipliers on Line 22 are entered on Line 23 for each section.

The Architects' Fee Multiplier of 1.07 is from the Average Architect Fees table. Both SEG 1 and SEG 5 require 1.07. A more detailed fee is available from Table IV. This multiplier (1.07) and the County Multiplier (.97) are entered on Lines 25 and 26 and combined to give the final multiplier (1.038) for Sections I, II and III on Line 27. Line 24 is now multiplied by Line 27 and the total entered on Line 28. The total lump sum costs are brought forward from the reverse side of the form and entered on Line 29 and added to Line 28 to give the reproduction new cost, which goes on Line 30.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Michigan Department of Treasury
L-4105 (Rev. 10-91)

This form is issued under the authority of P.A. 141 of 1986, Section 211.10e. Filing is voluntary.

STC SEGREGATED COST COMPUTATION SHEET (S.F. COSTS)

OWNER	TENANT	PROPERTY ADDRESS	
TYPE	YEAR BUILT / YEAR REMODELED	PERCENT CONDITION	SECTION
COUNTY	UNIT / EXAMINED BY		DATE
NO. OF STORIES	HEIGHT PER STORY	QUALITY	AGE / CLASS
1/1/4	13'/12'/11'	Good/Good/Good	11 years / B/B/B

FLOOR AREA COSTS

	AREA	4,700 sq. ft.		4,700 sq. ft.		18,800 sq. ft.			
	FLOOR/USE	1/Bsmt.		1/Office		4/Apt.			
		NO.	SECTION I	NO.	SECTION II	NO.	SECTION III	NO.	SECTION IV
1. Excavation, Site Preparation	Bsmt.: 13' deep @ $.46/cu. ft.	2	5.98						
2. Foundation	Class B bsmt.: $3.76 x .968 x 1.02/office: $3.76 x .968/apt.: $3.56 x .968 x 1.02	2	3.71	2	3.64	2	3.52		
3. Frame	Class B bsmt.: $21.30 x 1.03 x 1.08/office: $21.30 x 1.08/apt.: $18.35 x 1.03 x 1.06	3	23.69	3	23.00	3	20.03		
4. Floor Structure	Bsmt.: conc. slab w/vapor barrier/upper floors: elevated slab	3	7.32	2	14.80	2	14.20		
5. Floor Cover	Bsmt.: conc. hardener & sealer/office: VCT/apt.: 75% carpet, 25% VCT	3	1.63	3	3.61	3	5.57		
6. Ceiling	Bsmt.: unfin./office: fbgls. acoust. w/T-bar susp./apt.: furn. lath/plaster	–	——	2	4.43	2	8.22		
7. Interior Construction	Bsmt.: see lump sum/office: 100% masonry/apt.: 50% frame, 50% mason.		L.S.	3	49.25	2	24.80		
8. Plumbing	Bsmt.: none/office: many avg. fixt./apt: 4 rooms, 2 baths		——	2/3	6.97	3	11.60		
9. Sprinklers	Bsmt.: only: wet system, exposed, unfinished ceiling	1	3.34		——				
10. Heating, Cooling, Ventilating	Bsmt.: none/office & apt.: hot & chilled water		——	2	22.90	2	17.25		
11. Electrical	Bsmt.: unfin. rigid conduit/office & apt.: above avg. fixtures & circuits	3	4.76	3	27.50	3	12.89		
12.	Total floor area unit costs; move to line 17		$50.43		$156.10		$118.08		

ROOF COSTS

13. Roof Structure	Concrete slab	2	$12.85
14. Roof Cover and Insulation	3-ply built-up/good roof insulation	3	5.05
15. Trusses			
16.	Total roof unit costs; move total to line 20		$17.90


FINAL CALCULATIONS

	from line	SECTION I Unit Cost X Area = Total Cost	SECTION II Unit Cost X Area = Total Cost	SECTION III Unit Cost X Area = Total Cost	SECTION IV Unit Cost X Area = Total Cost
17. Floor Area Costs	12	$50.43 x 4,700 = $237,021	$156.10 x 4,700 = $733,670	$118.08 x 18,800 = $2,219,904	
18. Exterior Walls	40	$22.26 x 3,744 = $83,341	$51.00 x 3,456 = $176,256	$48.00 x 12,672 = $ 608,256	
19. Wall Ornamentation	40			$55.00 x 1,164 = $ 64,020	
20. Roof	16			$17.90 x 4,700 = $ 84,130	
21. Section Sub Totals		$320,362	$909,926	$2,976,310	
22. Number of Stories Multiplier		X 1.00	X 1.005	X 1.005	X
23. Section Totals		$320,362	$914,476	$2,991,192	

COMPUTATION AND NOTES

24. Total of all Sections	$4,226,030
25. Architect's Fees	1.07
26. County Multiplier	.97
27. Composite Multiplier (Multiply Line 25 by Line 26)	1.038
28. Line 24 X Line 27	$4,386,619
29. Lump Sums (Total from Line 39)	$383,029
30. Reproduction/Replacement Cost (Add Line 28 to Line 29)	$4,769,648
31. Depreciation Multiplier (Assessor's Manual)	%
32. Functional Obsolescence (Percent Good)	%
33. Economic Obsolescence (Percent Good)	%
34. Depreciated Cost (Multiply Line 30 X 31 X 32 X 33)	
35. Economic Condition Factor (E.C.F.)	
36. True Cash Value (Multiply Line 34 X 35)	
37. Reproduction/Replacement Cost Divided by Floor Area	
38. True Cash Value Divided by Floor Area	

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

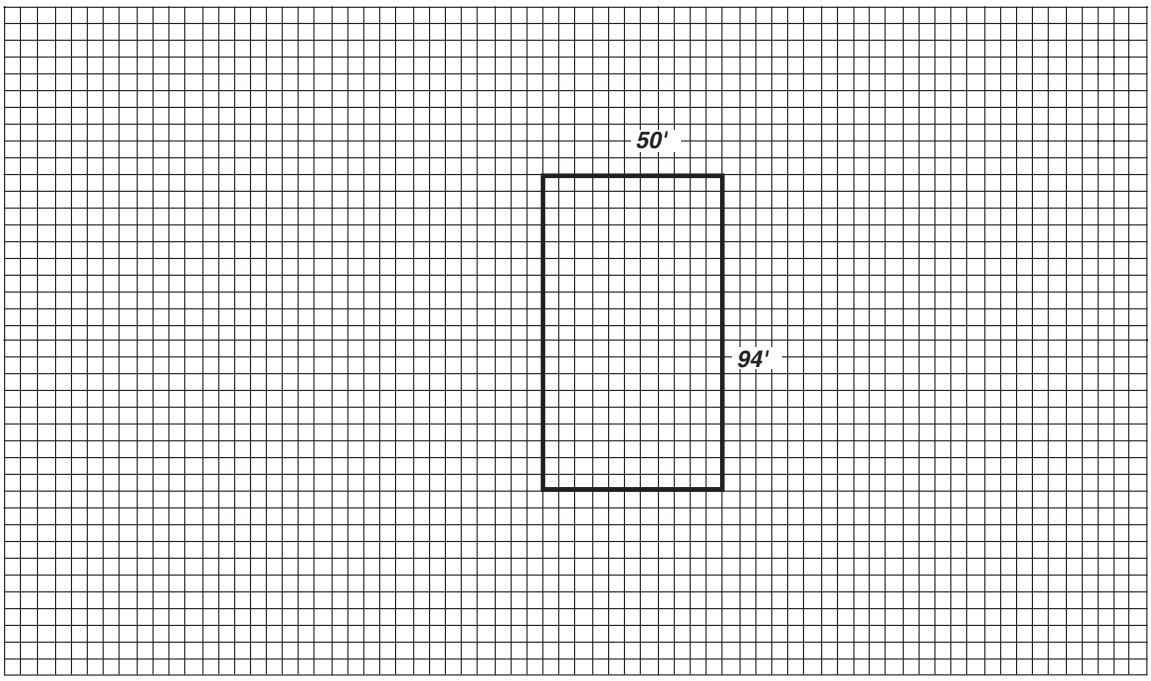

LUMP SUM ADDITIONS: For items not priced on front, add as lump sums: Elevators, Refrigeration, Stained Glass, also miscellaneous costs from the segregated cost pages. (Apply architect's fees and appropriate county multipliers before transferr ing total to line 29.)

Item	Cost Per Square Foot	MULTIPLIERS				Area	Total Cost
		Section	County	Arch. Fee	Composite		
Bsmt. interior, 6" tile	*$12.45*	*UIP 2*	*.97*	*1.07*	*1.038*	*2,100 sq. ft.*	*$ 27,139*
Bsmt. stairs, 7" risers	② *$270.01/riser*	*SEG 5*	*.97*	*1.07*	*1.038*	*22 ea.*	*6,166*
Elevators: 200 fpm, 2500#							
2 selective/collective	*$117,000*	*UIP 7*	*.97*	*1.07*	*1.038*	*2 ea.*	*242,892*
6 stops per elevator	*$6,350*	*UIP 7*	*.97*	*1.07*	*1.038*	*12 ea.*	*79,096*
Built-ins: Range/oven	② *915*	*SEG 1*	*.97*	*1.07*	*1.038*	*16 ea.*	*15,196*
Dishwasher	② *565*	*SEG 1*	*.97*	*1.07*	*1.038*	*16 ea.*	*9,384*
Disposal	② *190*	*SEG 1*	*.97*	*1.07*	*1.038*	*16 ea.*	*3,156*
							$ *383,029*

39. TOTAL LUMP SUM COSTS - Move Total to Line 29

WALL COSTS

Column Rating				SQ. FT.	RATE	COST
2	BASEMENT WALLS	*Unfin./reinforced concrete, 288' x 13'*	L.F. X Ht.	*3,744*	*$22.26*	*$ 83,341*
3	EXTERIOR WALLS	*Metal & glass panels, office, 288' x 12'*	L.F. X Ht.	*3,456*	*51.00*	*176,256*
3	*Exterior walls: metal & glass panels, apt. 288' x 11' x 4 floors*			*12,672*	*48.00*	*608,256*
2	WALL ORNAMENTATION	*Granite facing, 194' x 6'*	L.F. X Ht.	*1,164*	*$55.00*	*$ 64,030*

40. WALL COSTS - Move COSTS to Line 18 or 19

FIGURE 7

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

Apartments, hotels, clubs and other similar multi-unit residential buildings differ in various ways from typical light residential-type construction, and therefore, are handled in a separate section. If, however, an occupancy of this group is of typical light construction, it should be priced from Section SEG 2. For instance, a duplex or four family flat with comparatively light foundations and frame, residential heating and no elevators would be priced from Section SEG 2.

Selection of Section SEG 1 or SEG 2 for debatable buildings will not greatly affect the final answer if the proper segregation and quality are chosen within each section. In general, most buildings over three stories in height will be priced from this section.

Garages for apartments and hotels, as usually found in large metropolitan apartment buildings or hotels, should be priced from this section. Garages that are typical of those found in residences or garden apartments should be priced from Section SEG 2, while all Class A or B construction is priced from this section.

For mixed occupancies, such as city clubs, hotels, country clubs, etc., the entire area, i.e., halls, gymnasiums, residents' rooms, kitchens, etc., should be priced within one occupancy. A definite portion of an office building occupied as apartments, or a hotel over a store, should be priced from this section. The store portion of the building should be priced from Section SEG 3.

The costs given below are average costs of various components including contractors' profit and overhead but not architects' fees. They cover the basic construction of the building, including most items usually found in the general contract, but do not include furnishing and fixtures specific to a definite tenant example. Bars, kitchen equipment, counters or seating, which are not considered built-in and permanently attached under the general contract.

Prices of such items may be found in Section UIP 12.

Swimming pools, jacuzzis, sports courts, built-in appliances, elevators and sprinklers are not included in any of the interior costs in this section.

Frame costs should be adjusted for partial bearing walls as described in Section UIP 1, using a cost proportional to the load which is carried by the frame.

SEGREGATED COSTS

(For explanation of the rating numbers, see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation (per cu. ft.)	$ 0.46	$ 0.63	$ 0.85	$ 1.12
Fill (per cu. ft. of compacted earth)	0.47	0.62	0.77	0.97
Site preparation (per sq. ft. of site)	0.37	0.47	0.65	0.84

FOUNDATION – Apply to total floor area including basements, but excluding mezzanines.

Class A	$ 3.87	$ 5.09	$ 6.76	$ 8.92
Class B	4.06	5.28	6.90	9.03
Class C, bearing wall	3.32	4.38	5.79	7.68
Non–bearing wall	3.14	4.18	5.55	7.38
Class D, masonry veneer	2.95	3.96	5.28	7.07
Siding or stucco	2.65	3.51	4.66	6.21
Pole frame construction	2.49	3.28	4.33	5.72
Class S	2.58	3.47	4.66	6.30
Classes C, D and S light perimeter foundation for open shell type structures	1.05	1.38	1.82	2.37
Add for perimeter insulation, ground floor area only	0.15	0.27	0.40	0.65
Earth–sheltered structures	0.19	0.35	0.63	1.03
Add for seismic base isolators	6.45	9.27	13.30	19.15
damping devices	2.73	3.64	4.85	6.45

FOUNDATION ADJUSTMENTS – Apply to base cost used.

Add 2% for each foot over 10' average story height.

Deduct 2% for each foot under 10' average story height.

Deduct .8% for each story over one, above ground, for multistory buildings.

Add for pilings from Section UIP 1.

For one story buildings with light perimeter grade beam foundations or foundations and footings poured monolithically with floor slabs, use 60% of the costs above, for that floor only.

If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

FRAME – Apply to total floor area including framed basements, but excluding mezzanines.

	1	2	3	4
Bearing walls, wood or steel floor supports only	$ 2.15	$ 2.49	$ 2.90	$ 3.36
Masonry supports only	2.90	3.39	3.98	4.64
Steel, fireproofed, Class A	21.15	25.50	31.00	37.75
Composite concrete steel, Class B	18.35	21.75	25.75	30.50
Concrete, reinforced, Class B	18.00	21.60	26.00	31.25
Precast, post-tensioned	17.30	20.40	24.15	28.50
Steel, Classes C and D	7.36	9.19	11.40	14.25
Class S	6.84	8.55	10.65	13.35
Light pre–engineered frame	4.45	5.51	6.79	8.37
Light tubular/pipe frame	2.68	3.47	4.53	5.88
Add for fireproofing	1.19	1.80	2.68	4.01
Steel columns, wood beams	4.67	6.11	8.02	10.50
Wood, A–frame construction	6.11	7.33	8.73	10.45
Laminated bents and arches	6.88	8.22	9.81	11.70
Light arch–rib construction	4.45	5.36	6.45	7.77
Mill–type (heavy timber) construction	7.20	8.63	10.30	12.35
Heavy timber/log construction, architectural	14.70	18.20	22.60	28.00
Post and beam construction	5.06	6.04	7.20	8.59
Light pole type construction	2.93	3.66	4.56	5.72
Add for seismic/wind bracing, Classes A and B	4.32	6.11	8.69	12.30
Open Class C/D/S frames	1.18	1.50	1.88	2.36
Damping devices	1.75	2.33	3.11	4.17

FRAME ADJUSTMENTS – Apply to base cost used.

Add 3% for each foot of average story height over 10' base height.

Deduct 3% for each foot under 10' base height.

For multistory buildings add 2% for each story over two above ground, applied against the total floor area. For partially framed structures, see Section UIP 1.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

FLOOR STRUCTURE – Apply to area of described floor, loft or mezzanine.

	1	2	3	4
Asphalt on ground, including base	$ 3.89	$ 4.96	$ 6.28	$ 7.98
Concrete: on ground				
Exclusive of vapor barrier	5.42	6.54	7.88	9.51
Lift slab	15.85	17.80	19.95	22.35
Elevated flat slab and joists	17.85	20.20	22.65	25.50
Pan or waffle slab and joists	16.45	18.45	20.60	23.05
Precast joists and deck	15.70	17.60	19.65	22.00
Precast joists, wood sheathing	11.95	13.45	15.15	17.00
Cored plank on bearing walls	13.65	15.30	17.15	19.30
Steel joists: flat slab	19.55	22.35	25.50	29.00
Corrugated deck and concrete	16.00	18.90	22.35	26.50
Cellular deck and concrete	18.50	22.10	26.50	31.75
Precast deck	17.10	19.30	21.85	24.80
Wood sheathing	9.66	12.15	15.30	19.25
Light–gauge truss joists	8.30	10.60	13.60	17.35
Wood joists and sheathing	8.06	10.30	13.20	16.80
Joists and bridging only	6.11	8.09	10.70	14.15

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	$ 1.03	$ 1.40	$ 1.94	$ 2.67
Each inch of sheathing over 1'', add	1.87	2.08	2.33	2.62
Foamed concrete surfacing, 1½'' – 2''	1.55	1.84	2.20	2.64
Floor insulation, add	1.08	1.38	1.78	2.28

FLOOR COVER – Apply to area of floor described.

	1	2	3	4
Access (computer) floor, on stanchions	$ 27.75	$ 32.75	$ 38.75	$ 45.25
Asphalt tile	3.23	3.79	4.45	5.22
Bamboo, laminated plank	15.30	18.35	21.90	26.25
Block, wood, treated	10.20	12.15	14.40	17.15
Brick, common, in mortar	12.75	15.15	17.95	21.30
Brick pavers, in concrete	14.95	17.85	21.15	25.00
Carpet and pad	3.64	5.82	9.03	13.90
Custom carpet and pad	13.55	22.30	35.25	54.50
Indoor/outdoor	3.23	4.13	5.29	6.78
Color, concrete	1.55	1.92	2.36	2.93
Cork	8.52	9.84	11.35	13.15
Diato, magnesite, etc	10.90	12.65	14.65	16.95
Flagstone, random local stone, in concrete	20.20	23.70	28.00	32.75
Hardener and sealer, concrete	1.16	1.58	2.12	2.89
*Hardwood	12.70	16.55	21.70	28.50
Sports–gym floors on resilient sleepers	13.90	16.95	20.70	25.25
Leather	52.50	61.50	71.50	82.50
Linoleum	5.29	6.36	7.65	9.16
Marble or granite	35.50	49.25	69.00	96.00
Cast tile	21.90	25.75	30.00	35.25
Melamine laminated tile or sheet	4.64	6.28	8.49	11.50
deluxe	11.00	12.85	15.10	17.70
Plastic tile, interlocking	10.50	11.65	12.95	14.40
Rubber fabric tile	14.40	16.70	19.50	22.75
Rubber tile or sheet	6.38	8.56	11.50	15.45
Seamless plastic, epoxy, urethane, neoprene,				
1/32" – 1/16" thin coat	5.95	7.25	8.83	10.75
1/8" – 3/8"	9.16	11.40	14.15	17.70
Add for colored chips or glitter	2.50	3.03	3.73	4.57
Slate, grouted	22.30	26.50	31.50	38.00
Softwood	10.05	11.95	14.15	16.80
Stone plank	21.45	26.00	31.50	38.75
Synthetic sports surfacing	11.15	13.75	17.00	21.00
Terrazzo (exclusive of base slab)	15.75	19.50	24.15	29.75
tile	29.00	33.50	38.75	45.00
Tile, ceramic or quarry	15.55	19.80	25.25	32.00
Custom tile or mosaics	35.50	43.50	52.50	64.00
*Wood over concrete, hardwood	14.40	18.70	24.25	31.50
parquet block, prefinished, in mastic	13.55	18.85	26.00	36.25
Softwood	11.35	13.45	15.90	18.95
Vinyl composition tile or sheet	3.23	4.02	5.04	6.29
Vinyl sheet	4.89	6.75	9.33	12.90
Vinyl tile	5.22	7.62	11.10	16.20
*Add for custom wood floors	9.55	19.80	35.25	58.50
For pictorial artwork, add	15.70	21.50	29.50	40.50

For pool decking, see Section UIP 13.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

CEILING – Apply to area of described ceiling. To convert costs to floor area for high pitched ceilings, use the roof slope multipliers found on Page 8.

	1	2	3	4
Acoustical ceilings, tile or panels:				
metal panels, incl. pads and suspension system	$10.65	$13.10	$16.05	$19.80
Mineral fiber, fiberglass, panels only	2.28	3.26	4.64	6.60
Organic fiber, wood or cane, panels only	2.90	3.34	3.87	4.49
Embossed metal	8.68	11.60	15.55	20.85
Fiber sports court panel with suspension system	8.43	10.15	12.25	14.80
Gypsum board, taped and painted	2.99	3.31	3.70	4.10
spray on texture	2.90	3.15	3.40	3.70
Mirror faced panels	29.00	32.00	35.00	38.75
Paint or stain, bottom of roof or floor	0.93	1.22	1.62	2.12
Plaster on lath: acoustical	6.08	6.84	7.65	8.56
Spray on, thin coat with texture, on lath or drywall	4.41	4.85	5.33	5.88
Standard, add 20% for Keene's	5.27	5.94	6.66	7.50
Add for metal lath	0.69	0.84	0.99	1.19
Plaster on masonry soffit:				
Acoustical	5.20	5.82	6.51	7.26
Spray on, thincoat with texture	3.51	3.83	4.20	4.60
Standard, add 24% for Keene's	4.41	4.95	5.58	6.26
Plaster panels, decorative	20.20	22.25	24.55	27.00
Plastic panels, with suspension system, but excluding lighting	9.74	11.65	13.95	16.65
Plywood (softwood) or hardboard panels	4.80	5.53	6.34	7.31
Hardwood	6.97	8.37	10.10	12.10
coffered or vaulted panel with molding	14.85	20.15	27.50	37.25
Custom woods, site–built	38.75	45.25	52.50	62.00
Polylaminated panels (FRP)	4.64	5.14	5.69	6.29
Insulated panel	6.95	7.76	8.66	9.66
Wood boards or T&G softwood	4.65	5.41	6.28	7.31
hardwood	7.80	9.11	10.60	12.35
Carved, decorative	13.35	19.55	28.75	42.25

CEILING EXTRAS – Add to ceiling costs. For special ornamentation, see Section UIP 2.

	1	2	3	4
Ceramic tile, add	$18.95	$24.30	$31.25	$40.25
Custom tile, decorative	39.75	48.25	59.00	72.00
Custom papers, stenciling, staff, add	18.20	25.00	34.75	48.00
Border or coving, only	4.57	5.94	7.75	10.10
Extensive decor, leather, custom plaster, terra cotta, add	56.00	70.00	88.50	110.00
Wood furring	1.41	1.76	2.18	2.70
Metal furring	2.11	2.68	3.37	4.29
If ceiling structure is required which is not part of the roof or floor structure, add	2.21	2.77	3.46	4.33
Suspended ceiling, metal (suspension system) add	1.93	2.46	3.15	4.02
Fiberglass, FRP	3.02	3.68	4.49	5.45
Hardwood, decorative	5.49	7.67	10.75	15.00
for seismic support, add	0.35	0.44	0.59	0.72
Ceiling insulation, add	1.03	1.44	2.06	2.93
Vinyl faced, exposed	1.44	1.69	1.94	2.25
Add for underdeck supporting bands	0.46	0.56	0.65	0.75
Rigid board, faced	2.00	2.65	3.51	4.63

For ceiling domes, see stained glass, Page 7.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

INTERIOR CONSTRUCTION – Apply to total floor area. Add or deduct 4% for each foot of variation from 10' average story height.

FRAME INTERIOR PARTITIONS

	1	2	3	4
Apartments, 1 room average	$ 31.75	$ 38.00	$ 44.50	$ 52.50
2 rooms	30.25	35.75	42.25	50.00
3 rooms	28.75	34.25	40.50	48.00
4 rooms	27.50	32.50	38.75	45.75
5 rooms and over	26.00	31.00	36.75	43.75
Luxury	54.50	68.50	87.00	109.00
City clubs	41.00	47.50	55.00	64.00
Clubhouses	23.70	30.75	40.25	51.50
Senior centers	39.75	54.50	75.00	102.00
Country clubs	39.50	48.00	58.00	71.50
Dormitories	40.25	48.50	58.50	71.00
Fraternity houses	32.25	36.75	42.25	48.25
Group care homes, lower qualities	35.25	43.75	53.50	66.50
Higher qualities	44.50	58.50	78.00	102.00
Health clubs	32.00	38.25	45.75	54.00
Homes for the elderly	43.50	52.50	63.50	77.50
Hotels, full service	46.00	52.50	59.50	68.00
Limited service	36.25	41.00	45.75	51.00
Mortuaries	31.25	39.00	48.25	60.00
Recreational (pool) enclosures	4.70	12.00	23.00	39.50
Rectories	30.00	35.25	42.00	49.25
Rooming houses	28.25	32.25	36.50	41.50
Row houses	28.00	32.75	38.25	44.50

MASONRY INTERIOR PARTITIONS

Apartments, 1 room average	$ 35.75	$ 42.00	$ 49.25	$ 57.50
2 rooms	34.25	40.25	47.25	55.00
3 rooms	32.75	38.25	45.00	52.50
4 rooms	31.00	36.50	43.00	50.50
5 rooms and over	29.50	34.75	41.25	48.25
Luxury	59.50	75.00	93.50	116.00
City clubs	45.25	52.50	60.00	69.00
Clubhouses	27.00	34.50	44.25	56.50
Senior centers	44.25	59.50	81.00	110.00
Country clubs	43.75	52.50	64.00	77.50
Dormitories	44.50	53.50	64.50	77.50
Fraternity houses	36.25	41.25	46.75	53.00
Group care homes, lower qualities	39.75	48.25	58.50	72.00
Higher qualities	49.00	64.00	84.00	109.00
Health clubs	36.00	42.75	50.50	59.50
Homes for the elderly	48.25	57.50	69.00	83.00
Hotels, full service	50.50	57.50	65.00	74.50
Limited service	40.50	45.25	50.00	56.00
Mortuaries	35.00	43.50	53.50	66.00
Recreational (pool) enclosures	5.83	13.85	25.75	43.75
Rectories	33.75	39.75	46.50	54.00
Rooming houses	32.00	36.00	41.00	46.00
Row houses	31.50	36.75	42.75	49.25

MEZZANINES – Apply to open mezzanine area. (Cost of miscellaneous items such as rails, stairs, etc.)

Mezzanine	$ 4.30	$ 5.07	$ 5.97	$ 7.03

PLUMBING – Apply Table I to total floor area. Use Table II or Section UIP 3 for more detailed costs.

TABLE I – Typical cost ranges	1	2	3	4
Apartments, 1 room, 1 bath avg	$ 9.69	$ 12.85	$ 17.15	$ 22.70
2 rooms, 1 bath	9.00	11.85	15.55	20.50
3 rooms, 1 bath	8.27	10.85	14.20	18.55
4 rooms, 1 bath	7.65	9.92	12.90	16.70
5 rooms, 1 bath	7.04	9.08	11.75	15.15
3 rooms, 1½ baths	9.66	12.55	16.35	21.20
4 rooms, 1½ baths	8.94	11.50	14.80	19.00
5 rooms, 1½ baths	8.19	10.55	13.55	17.55
4 rooms, 2 baths	10.15	13.05	16.80	21.60
5 rooms, 2 baths	9.33	11.95	15.25	19.60
6 rooms, 2 baths	8.52	10.85	13.85	17.70
5 rooms, 2½ baths	10.45	13.30	16.95	21.60
6 rooms, 2½ baths	7.65	10.50	14.35	19.65
Luxury	15.05	18.80	23.45	29.25
City clubs	14.25	17.55	21.50	26.50
Clubhouses	5.86	9.46	14.90	22.90
Senior centers	9.34	13.90	20.65	30.75
Country clubs	11.95	16.50	22.75	31.25
Dormitories	10.80	15.90	23.55	34.75
Fraternity houses	9.16	12.15	16.05	21.30
Group care homes	10.65	14.90	20.70	29.00
Health clubs	7.19	11.85	18.80	29.25
Homes for the elderly	11.30	14.80	19.50	25.50
Hotels, full–service	15.15	18.80	23.35	29.00
Limited service, individual baths	11.95	14.95	18.70	23.45
Common baths	8.78	10.20	-----	-----
Mortuaries	6.03	7.88	10.25	13.40
Recreational (pool) enclosures	1.65	6.82	14.55	26.00
Rectories	7.79	10.90	15.30	21.45
Rooming houses	7.60	9.92	12.95	16.95
Common baths	7.79	10.90	-----	-----
Row houses	7.87	10.30	13.45	17.60

TABLE II. ALTERNATE METHOD – Apply to total number of fixtures. Do not use Table I.

Residential occupancies	1190.00	1690.00	2370.00	3350.00
Hotels	1740.00	2370.00	3250.00	4450.00
Miscellaneous occupancies	1580.00	2490.00	3875.00	5850.00
Cost per tap or drain without fixture	765.00	970.00	1240.00	1590.00
residential drains and hydrants	211.00	305.00	430.00	620.00

SPRINKLERS – Apply to sprinklered area. Costs include all piping and connections to main for light hazard occupancies but do not include tanks. For double sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost. Small, intricate installations can cost twice the averages shown.

1,500	square feet	$ 5.32	$ 6.91	$ 8.94	$ 11.60
3,000		4.77	6.16	7.94	10.25
5,000		4.42	5.66	7.25	9.30
10,000		3.98	5.05	6.42	8.15
15,000		3.74	4.73	5.98	7.57
20,000		3.59	4.52	5.67	7.15
30,000		3.33	4.20	5.27	6.64
40,000		3.23	4.02	5.04	6.29
50,000		3.12	3.90	4.86	6.04
75,000		2.92	3.62	4.51	5.60
100,000		2.78	3.46	4.27	5.30
125,000		2.71	3.33	4.11	5.07
150,000		2.62	3.23	3.98	4.91
200,000		2.50	3.06	3.77	4.66
300,000		2.37	2.92	3.57	4.33
400,000		2.25	2.76	3.36	4.11
500,000		2.18	2.65	3.23	3.93

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

HEATING, COOLING, AND VENTILATION – Apply to total floor area.

Add or deduct 3% for each foot of variation in average story height from 10' base. Costs are given for gas fired heating systems. Modify costs as follows:

Oil fired + 7% Coal, stoker + 7% Coal, hand fired - 2%

	1	2	3	4
Heating only				
Electric, cable or baseboard	$ 4.13	$ 5.51	$ 7.34	$ 9.74
Radiant panels	3.80	4.91	6.29	8.12
Electric wall heaters (inc. FWA)	1.92	2.34	2.90	3.57
Forced air	4.57	6.64	9.65	14.05
Hot water, baseboard or radiators	7.47	10.20	14.05	19.30
Radiant floor	7.10	10.20	14.60	20.90
Radiant heat, gas, suspended	2.14	2.87	3.85	5.14
Space heaters, gas, with fan	1.66	2.30	3.18	4.38
Steam radiator, with boiler	7.03	9.56	13.00	17.75
Without boiler	5.80	8.06	11.25	15.60
Wall or floor furnace	2.12	2.65	3.30	4.11
Heating and Cooling				
Zoned A.C., hot and chilled water	18.40	24.30	32.00	42.25
Warm and cooled air	10.75	14.90	20.55	28.50
Package heating and cooling, short ducts	7.87	10.80	14.80	20.35
Heat pump system	8.52	11.95	16.80	23.55
Add for ground loop heat source	2.50	3.12	3.95	4.96
Individual thru wall heat pumps	3.73	5.19	7.20	9.99
Cooling Only				
Evaporative coolers	3.80	4.57	5.45	6.54
Refrigerated air conditioning only, zoned system	7.62	9.52	11.90	14.90
Package unit, short ducts	5.38	6.60	8.09	9.92
Ventilation only, with ducts and blowers	1.40	1.80	2.31	2.96

ELECTRICAL AND LIGHTING – Apply to total floor area.

Few Outlets:				
Nonmetallic	$ 5.73	$ 6.88	$ 8.22	$ 9.87
Armored cable (BX)	6.72	8.04	9.62	11.50
Flexible conduit	7.88	9.41	11.25	13.50
Rigid conduit	9.24	11.00	13.20	15.75
Average Number of Outlets:				
Nonmetallic	8.75	10.85	13.45	16.65
Armored cable (BX)	10.25	12.65	15.60	19.35
Flexible conduit	11.95	14.80	18.25	22.55
Rigid conduit	14.05	17.30	21.20	26.00
Many Outlets:				
Nonmetallic	13.45	17.25	22.05	28.00
Armored cable (BX)	15.60	19.95	25.50	32.50
Flexible conduit	18.25	23.20	29.50	37.50
Rigid conduit	21.30	27.00	34.25	43.50
Unfinished Areas:				
Nonmetallic	2.36	2.87	3.46	4.18
Armored cable (BX)	2.83	3.39	4.10	4.95
Flexible conduit	3.33	4.02	4.86	5.86
Rigid conduit	3.99	4.79	5.76	6.92

Typical Costs for Some Occupancies

	1	2	3	4
Apartments, Classes A and B	$ 9.44	$ 13.30	$ 18.70	$ 26.50
Classes C, D and S	6.21	9.12	13.40	19.65
Luxury	15.60	22.55	32.50	46.75
City clubs	11.45	15.40	20.70	27.75
Clubhouses	8.53	13.75	21.60	33.25
Senior centers	15.05	22.45	33.50	49.75
Country clubs	13.50	19.60	28.25	41.25
Dormitories, Classes A and B	15.40	22.50	33.00	48.50
Classes C, D and S	9.50	16.20	26.00	41.00
Fraternity houses	8.78	11.65	15.40	20.50
Group care homes	8.71	12.80	18.85	27.75
Health clubs	9.66	14.00	20.35	29.50
Homes for the elderly,				
Classes A and B	11.80	16.15	22.00	30.00
Classes C, D and S	8.98	12.75	18.10	25.75
Hotels, full service,				
Classes A and B	14.30	19.35	26.25	35.50
Classes C and D	12.35	16.10	21.00	27.50
limited–service	9.68	12.85	17.00	22.60
Mortuaries	10.90	14.25	18.65	24.30
Recreational (pool) enclosures	4.66	6.23	8.35	11.20
Rectories	6.57	10.45	16.30	24.95
Rooming houses	6.22	9.10	13.35	19.60
Row houses	6.34	9.33	13.75	20.25

EXTERIOR WALL – Apply to total wall area.

Concrete or Masonry Walls				
Adobe or hollow clay block, 6"	$ 31.25	$ 34.50	$ 38.25	$ 42.50
8"	33.50	37.00	41.75	46.00
12"	37.75	42.50	47.25	52.00
14"	42.25	46.75	52.00	57.50
Adobe block, grouted or cavity, 22" – 24"	48.75	54.00	60.00	66.50
30" – 32"	52.50	58.00	64.50	72.00
Block, concrete, 6"	27.25	30.00	33.25	36.75
8"	29.25	32.50	36.00	39.75
12"	33.25	36.75	40.75	45.00
16"	37.50	41.50	45.75	50.50
for each addl 4" of block, add	4.12	4.51	4.94	5.40
Block, grouted or cavity, 10" – 12"	31.50	35.00	38.25	43.00
*Add for ornamented face block	2.02	3.04	4.53	6.79
Brick, block backup, 8"	35.25	39.00	43.50	48.25
12"	39.25	43.50	48.25	53.50
16"	43.25	48.00	53.50	58.50
Brick, common, 8"	39.25	43.50	48.25	53.50
12"	47.50	52.50	58.00	64.00
16"	55.50	61.50	67.50	75.00
for each addl 4" of brick, add	8.00	8.84	9.76	10.75
Brick, grouted or cavity, Reinforced, 9" – 10"	43.25	48.00	53.00	58.00
Block backup, 9" – 10"	39.00	43.25	48.00	53.00
Block backup, 12" – 14"	43.25	48.00	53.00	58.00
Brick, 6" SCR modular	30.00	33.25	37.00	41.75
8"	33.25	36.75	40.75	45.50
*Add for face brick	4.44	4.84	5.32	5.81
Concrete, reinforced, formed, 4"	30.75	34.00	37.50	42.25
6"	32.75	36.50	40.25	45.00
8"	35.25	39.00	43.25	48.00
12"	39.75	44.25	48.75	53.50
For each addl 4" of concrete, add	4.61	5.06	5.52	6.07

***NOTE:** The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented face or synthetic masonry veneer, see Wall Ornamentation.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

EXTERIOR WALL (continued)

Concrete or Masonry Walls (continued)

	1	2	3	4
Precast panels, 2”	$ 25.25	$ 28.00	$ 31.25	$ 34.75
4”	27.00	29.75	33.25	36.75
6”	29.50	32.75	36.50	40.00
8”	32.75	36.00	39.75	44.00
12”	38.25	42.25	46.00	50.50
Tilt–up panels, 4”	25.50	28.50	31.75	35.50
6”	27.25	30.50	34.25	38.25
8”	29.50	33.00	36.75	41.50
10”	31.75	35.50	39.75	44.75
12”	34.25	38.25	43.00	48.00
Add for insulated sandwich	2.33	2.90	3.57	4.44
Add for brick or tile inserts	8.98	10.95	13.30	16.15
Glass block, white or aqua	69.00	73.00	77.00	81.50
Colors or reflective	92.00	96.50	101.00	107.00
Local stone, block backup,				
Ashlar veneer, 12”	63.00	71.50	80.00	90.00
Rubble or rustic, 12” veneer,	51.00	57.50	65.50	75.00
For each 4” variation in thickness	4.12	4.51	4.94	5.40
Local fieldstone, in mortar, 12”	41.50	48.00	55.00	64.00
For each 4” variation				
In thickness	3.62	4.27	5.03	5.90
Local stone, rough cut, solid, 12”	66.50	81.50	98.50	120.00
Granite	71.00	89.50	112.00	142.00
Limestone	75.00	91.50	110.00	133.00
For each 6” variation in thickness	30.25	36.00	42.25	49.75
Rammed earth, soil cement, 24”	33.50	38.25	44.25	50.50
Pneumatic build–up,				
Formed one side	52.50	58.50	65.50	73.50
For each 6” variation in thickness	1.86	2.19	2.58	3.07
Tile, structural clay, 6”	29.00	32.50	36.50	40.25
10”	34.00	37.75	42.50	47.25

Concrete or Masonry Wall Extras

Add for stay–in–place forming	$ 1.70	$ 2.21	$ 2.87	$ 3.72
Add for glazed block/tile, each side	8.98	10.05	11.20	12.55
Add for pilasters	1.72	2.09	2.51	3.06
Add for bond beams	1.82	2.18	2.59	3.13
Add for seismic reinforcement	0.75	1.21	1.90	2.94
Add for synth. plaster on rigid				
insulation (EIFS)	7.21	8.75	10.65	12.95
Deluxe, textured or aggregate	11.80	14.00	16.55	19.75
Add for thin masonry on rigid insul	17.60	19.75	22.10	24.85
Add for clay tile backup				
in lieu of block	3.16	3.72	4.40	5.17
Add for earth–sheltered waterproof	1.34	2.10	3.20	4.86
Add for insulation	1.10	1.57	2.25	3.23
Earth–sheltered structures	1.93	2.80	4.02	5.77

Curtain Walls

Brick or tile panels	$ 38.25	$ 45.00	$ 53.00	$ 62.50
Concrete and glass panels, precast	46.00	52.50	60.50	69.50
Glass fiber reinforced, molded	39.00	47.50	58.00	70.50
Metal and glass panels (ordinary)	50.00	59.00	69.00	82.00
Stainless steel or bronze and glass	73.00	84.00	96.50	111.00
Stone panels, local stone	65.50	72.00	79.50	87.50
Granite	72.00	81.00	92.00	104.00
Limestone or slate	67.50	74.50	82.00	90.00
Marble	68.00	78.00	87.50	100.00
Composite or aggregate panels	46.75	57.50	71.00	87.50
Structural glazed atrium (incl. sup)	114.00	153.00	200.00	267.00
Steel studs and stucco	26.50	31.00	36.50	42.75
Synthetic plaster on rigid				
insulation (EIFS)	30.50	36.25	43.00	51.00
Deluxe, textured or aggregate	35.00	41.50	49.00	58.00
Wood or aggregate board siding	27.75	33.75	41.50	50.50
Add for insulation, insul. areas only	1.49	2.17	3.12	4.57

EXTERIOR WALL (continued)

Pre-Engineered Walls

	1	2	3	4
Sandwich panels, alum. or steel,				
both sides	$ 29.75	$ 34.25	$ 39.50	$ 45.25
Cement fiber or shotcrete,				
Two sides	22.45	27.00	32.50	39.00
Fiberglass panels, two sides	29.25	34.50	41.00	48.25
Glass exterior, metal interior	33.25	38.75	44.50	51.00
Add for stainless steel or				
textured (Galbestos)	4.64	5.54	6.60	7.87
Add for polylaminated (FRP)				
interior	1.08	1.40	1.84	2.39
Deduct for gypsum or				
hardboard interior	2.06	2.24	2.43	2.65

Single-Wall Construction

Aluminum or steel, on steel frame	$ 11.35	$ 13.70	$ 16.60	$ 20.05
On wood frame	10.70	13.00	15.70	19.05
Add for porcelain enamel finish	4.10	4.83	5.69	6.69
Add for stainless steel or				
textured (Galbestos)	4.60	5.45	6.48	7.68
Cement fiber (Transite),				
On steel frame	12.85	15.55	18.85	22.85
Sheet siding, on wood frame	11.75	14.35	17.55	21.30
siding or shingles,				
on wood frame	12.55	15.25	18.50	22.40
Fiberglass light panels,				
On steel frame	8.66	9.81	11.10	12.55
Sandwich panels	10.35	11.35	12.40	13.50
Heavy, (FRP), over 8 oz.	13.15	15.40	18.05	21.00
light panels on wood frame	7.57	8.57	9.72	11.05
sandwich panels	9.27	10.10	11.05	12.05
Heavy, (FRP), over 8 oz.	12.15	14.25	16.65	19.50
Glass panels	33.25	42.25	53.50	68.50
Projected greenhouse	71.00	79.50	87.50	98.00
Log, up to 10” diameter	28.00	36.25	46.75	61.00
Deluxe, hand hewn or oversized	41.25	50.50	62.50	77.50
Plywood, boards or siding,				
On steel frame	11.45	13.65	16.30	19.45
On wood frame	10.75	12.90	15.40	18.50
Stucco, on baled straw	22.90	27.50	33.00	39.75
Stucco, on wood frame	11.65	13.50	15.60	18.10
Synthetic plaster on rigid insulation				
(EIFS), on steel frame	16.30	19.30	22.85	27.00
Wood shingles, on wood frame	12.65	14.70	17.00	19.80
Add for exterior sheathing,				
per layer	1.71	1.96	2.25	2.61
Add for interior sheathing or liner,				
finished	2.99	3.51	4.08	4.77
Polylaminated panel (FRP)	4.05	4.82	5.72	6.78
Add for stud wall backing	1.09	1.31	1.59	1.92
Add for insulation	0.97	1.19	1.47	1.80
Vinyl faced, exposed	1.28	1.47	1.68	1.92
Rigid board, faced board, faced	1.80	2.33	3.01	3.89
Add for air infiltration wrap	0.29	0.37	0.47	0.62

Wood or Steel Stud Walls

Aluminum or steel siding, horizontal	$ 22.05	$ 25.50	$ 29.50	$ 34.25
Sheet panels	19.90	23.30	27.25	31.75
Asphalt siding	19.25	22.10	25.50	29.50
Cement fiber siding or shingles,				
Horizontal	21.20	24.75	28.75	33.50
Sheet, embossed	20.10	23.15	26.50	30.50
Hardboard siding or shingles,				
Horizontal	21.00	24.10	27.50	31.50
Sheet, embossed	19.95	22.90	26.25	30.00
Plywood, textured	20.20	23.25	26.75	30.50
Deluxe, redwood, cedar, etc	22.65	26.00	30.00	34.50

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

EXTERIOR WALL (continued)

Wood or Steel Stud Walls (continued)

	1	2	3	4
Shingles or shakes, wood	$ 22.95	$ 26.50	$ 31.00	$ 35.75
Stucco	21.80	25.25	29.50	34.00
Synthetic plaster on rigid insulation (EIFS)	25.50	29.75	34.75	40.50
Deluxe, textured or aggregate	30.25	35.25	41.25	47.50
Vinyl siding	21.80	25.25	29.25	33.75
Wood siding	21.95	25.25	29.00	33.25
Deluxe, redwood, cedar, etc	24.00	28.00	32.50	37.75
Log, veneer siding	23.80	29.50	36.25	45.00
Deluxe, half round, full corners	37.25	41.50	46.75	52.50
Veneer, face block or concrete				
Brick	27.50	31.25	36.00	41.25
Common brick	27.75	32.00	36.75	42.75
Face brick	31.75	36.25	41.50	48.00
Mortarless brick	32.00	36.25	41.25	46.75
Stone, ashlar veneer	48.50	56.00	65.00	74.50
Rubble or rustic	39.00	45.25	52.50	61.00
Synthetic veneer or panel	28.00	33.75	41.00	49.00
Thin veneer on rigid insulation	33.25	38.25	44.25	50.50
Add for sheathing	1.33	1.62	1.94	2.34
Add for seismic/wind bracing	0.75	0.91	1.09	1.33
Add for insulation	0.93	1.12	1.38	1.71
Add for air infiltration wrap	0.28	0.37	0.52	0.66
Add for air space wrap	0.96	1.09	1.25	1.41
Add for double stud walls	1.97	2.37	2.89	3.49
Add for wood stresskin sand. pan.	6.47	7.56	8.80	10.30

BASEMENT WALLS – Apply to basement wall area.

Concrete block, reinforced, 6”	$ 14.40	$ 16.30	$ 18.35	$ 20.75
8”	16.00	18.25	20.70	23.40
12”	20.05	22.55	25.25	28.50
for each additional 4” of block, add	4.04	4.40	4.80	5.25
Concrete, reinforced, 6”	17.50	19.75	22.25	25.00
8”	19.80	22.25	25.00	28.00
12”	24.15	27.00	30.00	33.75
16”	28.50	31.75	35.50	39.25
For each additional 4” of concrete, add	4.45	4.86	5.32	5.81
Masonry, brick, 8”	24.80	27.75	31.00	34.75
Stone, 12”	34.25	39.25	45.50	52.00
For each 4” variation in thickness	7.90	8.68	9.54	10.50
Wood, treated	14.30	17.70	21.85	27.00
Add for stay–in–place forming	0.78	1.19	1.80	2.73
Add for waterproofing	1.37	1.72	2.18	2.73
Earth sheltered structures	2.05	3.02	4.45	6.57
Add for insulation	0.96	1.43	2.17	3.23
Earth sheltered structures	1.96	2.86	4.17	6.06

For specific earth-sheltered waterproofing, see Section UIP 1.

STAINED GLASS – Apply to art glass for window, dome or skylight area. These costs vary greatly and the following typical cost ranges should be used with caution. See Section UIP 6 for detail. For residential straight seams or simple bevel, deduct 50% from Low Cost. For ceiling domes, use low cost range for plastic, average for stock glass and high cost for custom stained glass.

Low cost, plain, min. work or detailed bevel etched	$100.00	$136.00	$187.00	$256.00
Average, simple figures and scenes	305.00	415.00	565.00	775.00
High cost, highly detailed work (incl. domes)	660.00	935.00	1310.00	1860.00

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face, Roman or Norm.	$ 15.10	$ 17.45	$ 20.05	$ 23.20
Face, standard size	16.30	19.00	22.15	25.75
Mortarless brick	17.30	19.90	22.90	26.25
Select common	14.65	16.95	19.65	22.75
Used	16.05	18.50	21.30	24.60
Simulated veneer or panel, 1/4” - 3/8”	12.90	15.70	19.10	23.20
Thin veneer on rigid insulation	17.60	19.65	22.10	24.75
Add for pictorial carved artwork	211.00	242.00	274.00	312.00
Cement fiber siding	4.21	5.11	6.20	7.54
Concrete, ornamental cast stone	33.25	39.75	47.50	56.50
Concrete block, imitation flagstone	13.30	15.55	18.20	21.20
Solar screen	14.30	16.80	19.65	23.15
Ornamented face, slump, fluted, Split or ground	14.40	16.60	19.15	22.15
Glazed one side, add	9.00	10.05	11.20	12.50
Cut stone, carved	143.00	206.00	299.00	432.00
Glass block, white or aqua	55.00	60.50	67.00	74.50
Solar or solar reflective	76.50	83.00	90.50	99.50
Granite, ashlar or panel	69.00	80.50	93.00	107.00
Limestone, ashlar or pane	51.00	59.50	69.50	82.00
Local stone, ashlar veneer or panel	44.25	52.00	61.00	72.00
Rubble or rustic	32.75	39.00	46.50	55.00
Imitation precast stone	14.80	19.15	24.80	32.00
Marble, panels	56.50	66.50	78.00	90.50
Metal panels, screens, louvers	25.50	32.50	41.50	53.00
Preformed wall panels	4.21	7.53	12.45	19.90
Add for curved panels	1.40	1.93	2.65	3.64
Ornamental doorways	82.50	172.00	303.00	500.00
Slate, panels	48.50	56.00	65.00	75.00
Stucco	5.48	6.11	6.87	7.69
On masonry	4.21	4.88	5.64	6.54
Add for synthetic on rigid insulation (EIFS)	3.23	4.17	5.39	6.95
*Built–up (EIFS) panel relief	7.03	9.12	11.85	15.40
Terra cotta	38.25	45.25	54.00	64.00
Tile, ceramic	19.60	22.30	25.50	29.00
*Mosaics	27.75	33.50	41.00	49.75
Hand painted tiles	144.00	200.00	280.00	392.00
Vinyl siding	4.46	5.35	6.42	7.69
Vitrolite (structural glass)	31.50	36.75	43.00	50.00
Wood, plywood	3.57	4.52	5.75	7.31
Shingles	5.06	6.02	7.14	8.47
Siding	4.47	5.58	6.94	8.63
Ornamented molding or trim	13.20	18.65	26.25	37.25
Add for treated wood	0.70	0.86	1.05	1.26
*Note - For pictorial artwork, add	15.75	21.90	30.50	42.25

EXTERIOR AND BASEMENT STAIRS – Per riser. For fire escapes, see Section UIP 5.”

Concrete	$259.00	$361.00	$494.00	$690.00
Steel pans or prefab. concrete on steel	290.00	392.00	530.00	720.00
Steel or aluminum grating	329.00	438.00	590.00	790.00
Wood	100.00	161.00	248.00	379.00

EXTERIOR BALCONIES – Apply to balcony area.

Concrete	$ 31.75	$ 40.25	$ 51.50	$ 66.00
Steel	29.50	39.50	53.00	70.00
Wood	27.75	36.50	48.50	64.00
Add for ornate finishes, balustrades	27.50	33.50	41.25	50.50

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

ROOF STRUCTURE – Apply to roof area.

	1	2	3	4
Concrete joists, slab	$16.20	$18.30	$20.85	$23.50
Lift slab	14.75	16.50	18.50	20.85
Pan or waffle slab and joists	15.00	16.85	18.90	21.25
Precast joists and deck	14.15	15.95	17.95	20.30
Precast joists, wood deck	11.50	12.90	14.45	16.15
Cored plank on bearing walls	12.55	14.10	15.85	17.80
thin shell	23.95	28.75	34.50	41.50
Concrete dome, cast–in–place	52.00	58.00	64.00	71.50
Thin shell	34.50	39.00	44.75	51.00
Fabric roof, air supported	56.50	61.50	66.50	72.50
Tension supported	62.50	69.50	79.00	87.50
Add for thermal liner	5.38	6.59	8.04	9.86
Steel joists, concrete slab	18.45	21.10	24.05	27.50
Gypsum on formboard	10.00	12.50	15.55	19.35
Precast deck	16.00	18.15	20.60	23.35
Steel deck	10.80	13.75	17.60	22.40
Light-gauge truss joist	8.88	11.40	14.65	18.80
Steel deck, gypsum or concrete	13.75	17.15	21.30	26.50
Wood or composition deck	8.86	11.30	14.40	18.45
Light–gauge truss joists	7.66	9.84	12.60	16.15
Open steel system for corr. metal	4.27	6.23	9.11	13.30
Light purlin supports only	1.99	2.61	3.37	4.42
Steel space frame and				
Sheathing (three dimensional)	30.50	39.75	51.00	66.50
Architectural (excl. of glazing)	48.25	73.50	111.00	169.00
Metal dome and cover	41.75	48.00	55.00	62.50
Glazed or translucent panels	94.50	114.00	139.00	171.00
Wood joists, wood or comp. deck	6.74	8.73	11.30	14.60
exp. rafters, 2” T&G sheathing	9.65	12.00	15.05	18.70
prefab. panels (excl. of girders)	2.62	3.21	3.95	4.85
stresskin sandwich panels				
(exclusive of purlins)	9.52	12.15	15.45	19.80
Add for snow roof,				
furred sheathing layer	2.71	2.98	3.26	3.58
Open wood system for corr. metal	2.33	4.12	6.79	10.80
light purlin supports only for				
Metal, wood or fiberglass	1.09	1.43	1.89	2.46
Wood dome and deck	28.75	34.75	42.75	51.50
Add for seismic/hurricane truss ties	0.53	0.63	0.75	0.90
Add for complex roof, turrets,				
ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER – Apply to roof area.

	1	2	3	4
Aluminum or steel, corrugated,				
crimped or tile panels,				
preformed, light, to 26 gauge	$ 2.87	$ 3.65	$ 4.64	$ 5.91
heavy, under 26 gauge	5.91	6.76	7.73	8.84
Formed seam, flat or standing	7.54	9.25	11.40	14.00
batten seam	8.66	10.65	13.05	16.05
Sandwich panels, pre–engineered	11.90	15.00	18.75	23.55
Shingles	5.75	6.90	8.30	9.97
Aggregate finish	7.54	9.01	10.80	12.95
Thatch	24.30	26.50	29.00	31.75
Add for interior metal liner	2.67	3.06	3.47	3.98
Plastic	2.50	2.83	3.21	3.64
Add for porcelain enamel finish	4.05	4.79	5.67	6.70
Add for stainless steel or				
Textured (Galbestos)	4.57	5.42	6.45	7.69
Asphalt, corrugated	2.39	2.71	3.06	3.49
Atrium skylight, frame and glazing	46.75	62.50	84.00	111.00
Built up composition	2.73	3.39	4.24	5.29
Cement fiber shingles	5.95	7.29	8.96	11.00
Corrugated or sheet (Transite)	5.48	7.73	10.90	15.45
Composition, roll, mineral surface	1.52	1.77	2.06	2.42
Composition shingles, light, to 235#	2.50	2.78	3.11	3.51
Heavy over 235# or laminated	3.23	4.04	5.07	6.38
Copper, flat or standing seam	15.75	18.50	21.60	25.25
Batten seam	16.95	19.90	23.30	27.25
Shingles	15.55	16.80	18.25	19.80

ROOF COVER – Apply to roof area.

	1	2	3	4
Elastomeric or modified bitumen,				
Single ply	$ 4.38	$ 5.82	$ 7.69	$ 10.15
Reinforced sheet or spray,				
fluid coat	7.94	9.21	10.70	12.40
Fiberglass, corrugated or sheet, light	2.98	3.37	3.86	4.38
Sandwich panels	4.64	5.33	6.17	7.10
Heavy, FRP, over 8 oz	5.38	6.76	8.53	10.75
Slate	10.90	13.00	15.55	18.55
Red	20.75	24.95	30.00	36.00
Composite reinforced fiber	7.03	8.74	10.90	13.55
Terne, flat or standing seam	15.45	17.95	20.85	24.25
Batten seam	16.60	19.35	22.55	26.25
Tile, clay	9.99	12.65	16.00	20.20
Concrete	7.34	8.46	9.74	11.20
Plastic or rubber	6.63	7.54	8.57	9.74
Add for custom coloring or glazing	1.81	2.25	2.80	3.49
Wood, shakes	5.49	6.25	7.13	8.13
Shingles	4.89	5.67	6.57	7.62
Fiber shingles	3.23	3.80	4.51	5.29
Add for fire–resistant finish	0.72	0.87	1.05	1.25
Add for roof insulation	1.34	2.03	3.06	4.61
Earth sheltered structures	2.24	3.37	5.08	7.63
Add for earth sheltered waterproof	1.97	2.87	4.18	6.08

NOTE: For underroof insulation supporting structures, see Ceiling Extras on Page 3. For earthen roof cover, see Fill costs on Page 1. See Section UIP 13 for top dressing, sod and/or sprinklers For specific earth sheltered waterproofing, see Section UIP 1.

ROOF MODIFIERS – Use the following multipliers for sloping roofs to convert the unit costs to costs per square foot of horizontal roofed area.

Rise	:	Run	Multiplier	Rise	:	Run	Multiplier
6'	:	12'	1.12	12'	:	12'	1.42
8'	:	12'	1.20	18'	:	12'	1.80

TRUSSES AND GIRDERS – Apply to area supported.

Steel trusses or longspan girders	$ 3.74	$ 4.69	$ 5.88	$ 7.37
Timber trusses	4.24	5.32	6.70	8.39
Glued, laminated trusses or girders	3.83	4.73	5.86	7.25

CANOPIES OR MARQUEES – Apply to horizontal area. For light false mansard structures, deduct 50%. For greater detail, see Section UIP 4 or 6. Patio covers, see Section UIP 13.

Wood frame	$ 35.25	$ 43.75	$ 54.00	$ 66.50
Steel frame	41.50	52.00	65.00	81.50

DORMERS – See Section UIP 4, Roofs; for solar rooms and greenhouses, see Section UIP 11.

ARCHITECTURAL COLUMNS – See Section UIP 6.

ELEVATORS – Apply to total area served, or use detailed cost from Section UIP 7.

	1	2	3	4
Apartments, Classes A and B	$ 4.56	$ 5.97	$ 7.82	$10.25
Class C	3.33	4.11	5.04	6.25
Classes D and S	3.06	3.73	4.58	5.59
Luxury Apartments, Classes A and B	-----	10.35	11.85	-----
Class C	-----	6.18	6.98	7.96
Classes D	-----	5.48	6.18	6.98
City clubs, Classes A and B	-----	5.93	7.64	-----
Class C	-----	3.87	4.92	-----
Dormitories, Classes A and B	4.33	5.70	7.51	9.92
Classes C, D and S	-----	3.78	4.81	6.14
Homes for the Elderly, Classes A and B	4.20	5.59	7.36	-----
Classes C, D and S	2.84	3.64	4.67	-----
Hotels, Classes A and B, full–service	5.00	6.81	9.26	12.65
Limited service	4.67	5.53	6.54	7.75
Classes C and D, full service	3.42	4.48	5.84	7.64
Limited service	1.94	2.61	3.53	4.79

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

BUILT-IN CONSTRUCTION – Apply to each item.

	1	2	3	4
Appliance allowance (if not itemized),				
Owner occupied	1,820	4,150	7,550	12,800
Rental, including elderly or				
Senior citizen	1,310	1,660	2,120	2,700
Upscale				
Single unit (self–contained) kitchen	3,925	5,000	6,300	7,950
Garbage disposal	160	226	323	452
Deluxe, heavy duty	484	605	750	935
Range and oven combination	820	1,110	1,490	2,030
Residential, commercial quality	4,500	5,700	7,200	9,000
Custom, double wide	10,300	13,600	17,700	23,300
Microwave or refrigerated				
Combination	2,170	2,575	3,025	3,600
Range top	439	700	1,090	1,670
Component top, per component	580	815	1,160	1,640
Steamer	770	1,210	1,860	2,850
Induction top	1,160	1,590	2,220	3,050
Custom tops	3,050	4,325	6,250	8,900
Ovens	775	1,190	1,800	2,700
Custom double wall ovens	2,575	4,750	8,000	13,000
Microwave combination	2,070	2,600	3,250	4,050
Warming ovens	845	1,010	1,190	1,410
Oven, microwave	194	445	815	1,390
Exhaust fan and hood	200	362	605	975
Countertop down draft	1,030	1,270	1,570	1,940
Custom, stainless steel or copper	2,575	4,325	7,050	11,000
Cookware racks	258	565	1,030	1,710
Dishwasher	452	685	1,030	1,550
Deluxe, built–in	1,620	2,040	2,575	3,250
Individual drawers, built–in, each	1,300	1,620	2,050	2,575
Trash compactor	650	775	935	1,140
Radio–intercom, base system	530	685	885	1,150
Add per satellite	115	140	167	203
Audio/video entry system	3,500	4,850	6,750	9,250
Each extra monitor station	990	1,180	1,410	1,670
Refrigerator or freezer	680	1,310	2,250	3,650
Deluxe, built–in, each	3,600	5,100	7,250	10,300
Individual drawers, built–in, each	3,925	5,000	6,350	8,000
Mixer/ blender				
(food center, processor)	323	550	880	1,390
Deluxe, built–in	1,420	1,990	2,775	3,850
Can opener, built–in	77	105	144	194
Coffee maker, built–in	258	394	595	885
Toaster, built–in	160	207	264	343
Towel/food wrap dispenser, built–in	245	284	330	381
Wok or deep fryer, built–in	770	935	1,150	1,400
Deluxe	1,670	2,260	3,025	4,050
Kitchen hot–food heat lamps, each	458	520	600	685
Motorized pantries, 1' to 3'	5,700	6,850	8,100	9,750
Wine captains, undercounter	1,220	1,410	1,630	1,870
Standing units	2,975	3,500	4,050	4,725
Ice machines, residential	740	885	1,070	1,310
Deluxe, to 50# per day	1,300	1,640	2,120	2,700
Bathroom heater, electric	149	213	316	458
Mirror defog heaters	77	111	157	226
Hair dryer	97	145	216	323
Heated towel rack	515	1,170	2,160	3,625
Exhaust fan	149	200	277	375
Bathroom scale, built–in	251	284	323	362
Vacuum cleaner system, three inlets	2,070	2,300	2,550	2,825
Add for extra inlets	232	277	330	387
Ironing center	745	890	1,080	1,310
Clothes washer, single–family	725	910	1,150	1,480
deluxe	1,620	1,810	2,030	2,270
Add for pedestals	219	251	296	343
Dryer	640	785	970	1,190
Deluxe	1,080	1,280	1,510	1,800
Drying center	1,620	1,740	1,900	2,070
Combination unit	1,400	1,810	2,360	3,075

BUILT-INS (continued)

	1	2	3	4
Water softener	$ 1,680	$ 2,230	$ 2,950	$ 3,850
Complete filtration system	4,225	5,700	7,500	10,100
Closet carousels	4,200	5,100	6,150	7,400
Safe, built–in, small wall or floor	540	820	1,260	1,890
Deluxe	1,910	3,300	5,350	8,350
Residential security systems (wireless)	1,070	1,980	3,300	5,300
Hard wired	2,975	4,175	5,850	8,200
Home automation systems	3,400	4,275	5,450	6,950
Custom (including security system)	12,800	17,700	24,800	34,400
Trash compactor, apartment or motel	6,300	15,100	28,500	48,500
House phone, located at entrance	680	790	925	1,090
Add per door release	207	226	251	277
Intercom, master station,				
20–30 station	1,330	1,720	2,250	2,925
Add per intercom outlet or				
Remote station	154	180	207	239
Add per door release	219	239	258	277
Television security, closed circuit				
One camera and one monitor,				
Base system	2,000	4,350	7,900	13,300
Each extra camera	770	1,980	3,750	6,500
Each extra monitor	323	505	770	1,180
Video tape recorder	3,075	4,525	6,800	10,100
Home entertainment, audio–video systems:				
Built–in and/or				
including cabinets	15,000	31,800	56,750	94,250
Complete home (including				
security and automation system)	36,500	63,750	104,000	165,000
Home theater, (screening room) wall and sound treatments, stage,				
screen, seating, audio and projection equipment:				
Prefab. package units, complete	41,400	57,000	79,000	109,000
Custom–built theater and decor	275,000	330,000	395,000	472,000
Built–in aquarium				
(excl. fish and plants, etc.)	5,950	11,000	18,300	29,500
Bowling alley, reconditioned, with				
Automatic pinsetter,				
(new, add 30%)	28,900	36,100	44,800	56,000
Golf course simulator, complete station				
including projection equipment	6,500	18,600	37,100	64,500
Racquetball court, prefab., comp	48,100	55,000	62,750	71,500
Add for spectator viewing,				
Window/ wall	13,900	26,800	46,300	75,250
Shooting range, indoor,				
per station, complete	15,400	17,600	20,100	23,000
Soda fountain, complete unit,				
per linear foot	1,740	1,990	2,260	2,575
Wine vaults, modular room,				
15 to 75 sq. ft.	3,400	5,500	8,650	13,500
Sauna rooms, 15 to 100 sq. ft.	3,725	5,950	9,250	14,200
*Chandeliers, high–value	10,400	16,600	26,000	40,200
Add for winch,				
200– to 300–lb. capacity	1,810	2,050	2,320	2,625

For lobby, room and kitchen equipment, telephone systems, see Section UIP 12.

For complete kitchen units, see Section UIP 2.

Commercial washer/dryers, see Section UIP 12.

***NOTE:** See next page.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

APARTMENTS, HOTELS AND CLUBS

SECTION SEG 1
(SEGREGATED COST METHOD)

FIREPLACES – Cost per fireplace. For each additional opening using the same chimney, add 30% to 50% (custom, 20% to 40%). Buildings with basements, add 40% (custom, 25%) to extend the foundation to the basement level. "Steel, with flue" is the prefabricated hanging or free-standing-type fireplace or stove.

	1	2	3	4
One story	3,575	5,300	7,800	11,600
Add per additional story of chimney flue	960	1,290	1,720	2,310
Steel, with flue	1,900	2,700	3,800	5,400
Pellet stoves	3,750	4,650	5,800	7,150
Add per additional story of chimney stack	424	640	950	1,430
Direct vent	2,210	3,100	4,350	6,100
Custom or oversized, one story	13,300	17,400	22,800	29,800
masonry heaters, soapstone, etc.	12,400	20,300	31,800	49,400
Add per additional story of chimney flue	2,500	2,850	3,275	3,750
Steel, direct vent	5,500	7,050	9,000	11,600
Add for Heatilator type	535	715	950	1,270
Add for raised hearth	320	499	765	1,170
Add for log lighter	373	424	477	545

***Mantels, special designs or antique reproductions, add:**

Cast stone (bonded limestone)	6,200	8,900	12,900	18,400
Custom marble, granite or onyx	11,400	18,000	27,800	42,400
Ornate wood, carved	6,200	7,000	7,900	8,850
Precast plaster	3,200	4,300	5,800	7,800

***NOTE:** Fixtures classified by age or beauty as having antique or historical value, or designed by name artists, must be valued as art objects by fine arts specialists; costs can easily run seven to ten times the listed costs for chandeliers and two to four times for mantels.

NUMBER OF STORIES MULTIPLIER

To allow for the cost of hoisting materials, increased labor costs and miscellaneous costs due to high rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% (1/4%) for each story over three.

Example: Twenty-three-story building: Multiplier = 1.050

ATRIUM H.V.A.C.

To price the heating and cooling of large atrium areas, simply refine the appropriate square foot system cost to be applied to the ground floor area by 100% plus 3% for each foot over the 10-foot average story height adjustment found on Page 3.

Example: Seven-story building, atrium height of 74':Multiplier=2.92

COMPLETION OF BUILDING VALUATION

Contractors' overhead and profit, sales taxes, permit fees and insurance during construction are included in the costs above. Interest on interim construction financing is also included, but not financing costs, real estate taxes or brokers' commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County multipliers which bring the basic costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2
(SEGREGATED COST METHOD)

This section should be used to estimate costs of multi-unit residential buildings of similar construction: row houses, duplexes, flats, garden apartments and motels, where most components are similar in character. The factors given are averages for one, two and three story buildings. For most residential buildings over three stories high, Section SEG 1 should be used; however, three story light residential construction may be priced from this section. The assessor will frequently encounter three story multiple residences where the bottom floor is partially below ground level and partially above. This type of building should be priced as a two story plus basement.

Motels of one, two or three stories will normally be priced from this section. For more than three stories, Section SEG 1 will normally be used. All Class A and B residential structures should be priced from Section SEG 1. Foundation costs for an 800 square foot row house and those for a 4,800 square foot row house will vary widely in the ratio of perimeter to square footage of floor area. The amount of foundation required for a level location compared to that of a site with a steep slope or one requiring stepped footings can vary widely also. For these cases, an alternate set of tables is provided to accurately measure the differences due to size and shape, as well as climate and/or topography. Basement walls are not a part of the foundation, but of the basement, which is computed separately. When basement walls replace part of the foundation, a lower cost rank should be considered, always including the cost for a foundation.

Frame members in multi-unit residential structures usually consist only of the posts and girders supporting the floor structure of the first floor. Costs for "Bearing wall, wood or steel floor supports only" will usually be used. In many new motels and apartments, however, part or all of the building will be framed. The general rule is that when the frame is a separate distinct component, it should be priced as such. When the framing is integral to the wall, the cost of pilasters and bond beams, if applicable, should be added to the wall cost without additional frame cost except for floor supports.

SEGREGATED COSTS

(For explanation of the rating numbers, see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation (per cubic ft.)	0.47	0.63	0.84	1.12
Fill (per cu. ft. of compacted earth)	0.49	0.62	0.80	1.00
Site preparation (per sq. ft. of site)	0.35	0.47	0.63	0.85

FOUNDATION – Table I gives complete average costs per square foot of floor area. If a more detailed estimate is desired, use Tables II and III. For hillside construction and/or pilings, see Section UIP 1.

TABLE I – Apply to total floor area excluding basements.

Concrete Foundations for:

Class C, bearing wall	3.00	4.63	7.05	10.65
Non–bearing wall	2.90	4.45	6.79	10.25
Class D, masonry veneer	2.72	4.23	6.48	9.84
Siding or stucco	2.39	3.70	5.71	8.66
Pole frame construction	2.28	3.46	5.25	7.92
Class S	2.40	3.78	5.88	9.00
Classes C, D and S light perimeter foundation for large, open shell type structures	1.03	1.47	2.09	3.00
Add for perimeter insulation, ground floor area only	0.18	0.32	0.55	0.90
Earth–sheltered structures	0.21	0.44	0.81	1.34

For two and three story buildings, use 60% for each of the upper stories.
Where footings are poured monolithically with a slab floor, use 70% of the normal cost for that story only.
If foundations are brick or stone instead of concrete, increase costs by 20%.
For concrete block, reduce costs by 8%.
Add for pilings from Section UIP 1.

Wood Foundations for:

Class D, treated, masonry veneer	2.77	3.86	5.39	7.56
Siding or stucco	2.21	3.03	4.18	5.75
Piers with concrete footings	0.56	1.10	2.13	-----
Wood blocks or sills	0.62	0.99	1.52	-----

For two story buildings, use 40% of the cost for the second story.

FOUNDATIONS (Continued)

TABLE II. ALTERNATE METHOD – Apply to linear feet of bearing walls if Table I is not used. See discussion above.

	1	2	3	4
Class C	34.50	52.50	80.00	121.00
Class D, masonry veneer, conc.	31.00	48.00	74.00	113.00
Treated wood	31.50	44.00	61.50	86.00
Class D, siding or stucco, conc.	26.75	42.25	65.00	99.00
Treated wood	25.25	34.50	47.25	65.00
Class S	26.75	43.25	66.50	103.00
Classes C, D and S, reinforced light-grade beam	22.55	35.00	53.50	80.50
Wood, treated, sills	3.63	5.33	7.81	11.45
Add for perimeter insulation	1.40	3.15	5.78	9.69
Earth sheltered structures	2.00	4.55	8.38	14.15
Add for perimeter radon control matting	4.26	5.07	6.03	7.16
Add for perimeter raised floor skirting	12.40	14.60	17.25	20.25

TABLE III. CONCRETE COLUMN FOOTINGS – Apply to total number of columns if Table I is not used.

Concrete columns	73.50	128.00	208.00	329.00
Steel columns	66.00	119.00	198.00	312.00
Light pre-engineered frame	55.00	72.00	94.00	124.00
light tubular/pipe frame	41.00	57.50	81.00	114.00
Wood columns	60.50	97.00	151.00	233.00
Light pole frame	40.50	57.50	80.50	114.00
Piers, precast footing	18.35	28.50	43.50	66.50
Formed in place	64.50	74.50	86.00	100.00

FRAME – Apply to total floor area excluding basements.

Bearing walls, wood or steel floor supports only	1.86	2.15	2.49	2.87
Masonry supports only	2.62	3.06	3.55	4.14
Steel, Classes C and D	6.80	8.37	10.30	12.65
Class S	6.40	7.92	9.80	12.10
Light pre–engineered frame	4.13	5.05	6.23	7.64
Light tubular/pipe frame	2.50	3.20	4.14	5.32
Add for fireproofing	1.19	1.73	2.47	3.54
Steel columns, wood beams	4.45	5.80	7.59	9.91
Wood, A–frame construction	5.58	6.67	7.96	9.48
Laminated bents and arches	6.28	7.48	8.88	10.55
Light arch–rib construction	3.99	4.80	5.79	6.98
Mill–type (heavy timber) construction	6.58	7.84	9.35	11.15
Heavy timber/ log construction, Architectural	13.25	16.40	20.35	25.25
Post and beam construction	4.57	5.46	6.55	7.81
Light pole type construction	2.32	3.00	3.93	5.12
Add for seismic bracing for open CDS frames	1.21	1.54	1.96	2.50

Add 2% for each foot of average story height over 9' base height.
Deduct 2% for each foot of average story height under 9' base height.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2

(SEGREGATED COST METHOD)

FLOOR STRUCTURE – Apply to area of described floor.

	1	2	3	4
Asphalt on ground, including base	3.16	3.95	4.91	6.14
Concrete: on ground				
Exclusive of vapor barrier	5.10	5.97	7.02	8.22
Plain (unreinforced)	4.53	5.17	5.91	6.77
Lift slab	15.05	16.50	18.10	19.90
Elevated flat slab and joists	16.80	18.80	20.95	23.35
Pan or waffle slab and joists	15.65	17.20	19.05	20.95
Precast joists and deck	15.05	16.50	18.25	20.10
Precast joists, wood sheathing	10.90	12.20	13.65	15.30
Cored plank on bearing walls	12.95	14.30	15.70	17.30
Steel joists: flat slab	18.10	20.60	23.35	26.50
Corrugated deck and concrete	15.05	17.50	20.55	23.95
Cellular deck and concrete	17.00	20.10	23.65	28.00
Precast deck	16.30	18.00	19.95	22.05
Wood sheathing	9.12	11.35	14.15	17.60
Light–gauge truss joists	7.91	9.99	12.60	15.85
Wood joists and sheathing	7.64	9.64	12.15	15.35
Joists and bridging only	5.75	7.51	9.78	12.80

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	1.03	1.40	1.90	2.61
Each inch of sheathing over 1'', add	1.81	2.00	2.21	2.43
Foamed concrete surfacing, 1½'' – 2''.	1.55	1.83	2.17	2.56
Floor insulation, add	1.40	1.69	2.08	2.52

FLOOR COVER – Apply to total floor area excluding base-

Access (computer) floor, on stanchions	27.00	32.00	37.50	44.50
Asphalt tile	3.08	3.64	4.30	5.08
Bamboo, laminated plank	14.70	17.75	21.35	25.75
Block, wood, treated	9.29	11.10	13.20	15.75
Brick, common, in mortar	12.25	14.60	17.55	20.90
Brick pavers, in concrete	14.45	17.30	20.70	24.75
Carpet and pad	2.92	5.19	8.55	13.55
Custom carpet and pad	12.75	21.30	34.00	53.00
Indoor/ outdoor	3.11	4.01	5.16	6.63
Color, concrete	1.47	1.83	2.30	2.86
Cork	8.07	9.43	11.00	12.90
Diato, magnesite, etc	10.55	12.30	14.30	16.70
Flagstone, random local stone, in concrete	19.60	23.35	27.75	33.00
Hardener and sealer, concrete	1.10	1.50	2.05	2.78
*Hardwood	11.40	15.00	19.80	26.00
Sports–gym floors on resilient sleepers	13.30	16.50	20.25	24.95
Leather	52.50	61.50	72.00	84.50
Linoleum	5.08	6.14	7.44	8.97
Marble or granite	36.25	50.00	68.50	94.50
Cast tile	21.20	25.00	29.50	34.75
Melamine laminated tile or sheet	4.33	5.98	8.21	11.30
Deluxe	10.75	12.65	14.90	17.60
Plastic tile, interlocking	10.40	11.50	12.75	14.15
Rubber fabric tile	13.75	16.15	19.10	22.45
Rubber tile or sheet	6.26	8.43	11.40	15.40
Seamless plastic, epoxy, urethane, neoprene, 1/32" – 1/16" thin coat	5.66	6.98	8.62	10.65
1/8" – 3/8"	8.90	11.15	13.95	17.55
Add for colored chips or glitter	2.42	2.95	3.61	4.41
Slate, grouted	21.65	25.75	30.75	36.50
Softwood	9.03	10.85	13.05	15.65
Stone plank	20.40	25.00	30.75	37.50
Synthetic sports surfacing	10.75	13.35	16.65	20.65
Terrazzo (exclusive of base slab)	15.40	19.15	23.85	29.75
Tile	28.25	32.75	37.50	43.00
Tile, ceramic or quarry	15.15	19.30	24.70	31.50
Custom tile or mosaics	35.75	43.00	52.00	62.00

FLOOR COVER (Continued)

	1	2	3	4
Wood over concrete, hardwood	13.25	17.05	22.10	28.75
Parquet block, prefinished, in mastic	13.15	18.35	25.50	35.50
Softwood	10.30	12.35	14.70	17.65
Vinyl composition tile or sheet	3.08	3.90	4.95	6.26
Vinyl sheet	4.76	6.57	9.08	12.55
Vinyl tile	5.08	7.45	10.90	16.00
*Add for custom wood floors	9.22	18.80	33.25	55.00
For pictorial artwork, add	14.30	20.50	29.25	41.50

CEILING – Apply to area of ceiling described. To convert costs to floor area for high-pitched ceilings, use the roof slope multipliers found on Page 7.

Acoustical ceilings, tile or panels: Metal panels, incl. pads and Suspension system	9.72	12.00	14.90	18.40
mineral fiber, fiberglass, panels only	2.09	2.95	4.18	5.95
organic fiber, wood or cane, panels only	2.74	3.18	3.71	4.32
Embossed metal	7.68	10.50	14.40	19.75
Fiber sports court panel with suspension system	7.68	9.40	11.55	14.15
Fiberboard panels	2.22	2.52	2.87	3.26
Gypsum board, taped and painted	2.78	3.11	3.49	3.90
Spray on texture	2.67	2.93	3.24	3.58
Mirror faced panels	27.00	30.25	33.75	37.50
Paint or stain, bottom of roof or floor	0.85	1.13	1.50	2.02
Plaster on lath: acoustical	5.79	6.53	7.37	8.27
Spray on, thin coat with texture on lath or drywall	4.15	4.57	5.05	5.55
Standard, add 20% for Keene's	5.01	5.66	6.39	7.22
add for metal lath	0.71	0.81	0.93	1.06
Plaster on masonry soffit: acoustical	4.96	5.57	6.26	7.03
Spray on, thincoat with texture	3.34	3.64	3.96	4.32
Standard, add 24% for Keene's	4.15	4.71	5.33	6.04
Plaster panels, decorative	18.25	20.20	22.25	24.60
Plastic panels, with suspension system, but excluding lighting	8.97	10.85	13.20	16.00
Plywood (softwood) or hardboard panels	4.19	4.83	5.58	6.44
Hardwood	6.11	7.40	8.98	10.90
coffered or vaulted panel with molding	13.50	18.35	25.25	34.25
Custom woods, site–built	34.75	40.75	47.75	56.50
Polylaminated panels (FRP)	4.33	4.86	5.44	6.08
Insulated panel	6.59	7.31	8.10	8.97
Wood boards or T&G softwood	4.12	4.89	5.79	6.87
hardwood	6.70	7.94	9.43	11.20
Carved, decorative	11.85	17.35	25.50	37.75

CEILING EXTRAS – Add to ceiling costs. For special ornamentation, see Section UIP 2.

Ceramic tile, add	18.65	23.70	30.25	38.25
Custom tile, decorative	38.25	46.50	56.50	68.00
Custom papers, stenciling, staff, add	18.55	24.95	33.75	45.25
border or coving, only	4.41	5.66	7.28	9.31
Extensive decor, leather, custom plaster, terra cotta, add	55.00	68.00	84.00	105.00
Wood furring	1.26	1.56	1.94	2.39
Metal furring	2.02	2.55	3.21	4.08
If ceiling structure is required which is not part of the roof or floor structure, add	2.11	2.64	3.31	4.14

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2
(SEGREGATED COST METHOD)

CEILING EXTRAS (Continued)	1	2	3	4
Suspended ceiling, metal (suspension system) add	1.81	2.33	2.98	3.83
Fiberglass, FRP	2.83	3.46	4.23	5.19
Hardwood, decorative	4.95	6.57	8.70	11.55
for seismic support, add	0.34	0.44	0.57	0.77
Ceiling insulation, add	1.00	1.53	2.34	3.54
Vinyl faced, exposed	1.46	1.69	1.96	2.30
Add for underdeck supporting bands	0.44	0.53	0.65	0.80
Rigid board, faced	2.00	2.65	3.51	4.66

For ceiling domes, see stained glass, Page 7.

INTERIOR CONSTRUCTION – Apply to total floor area. Costs do not include fireplaces or built-in appliances. Add or deduct 5% for each foot of variation from 8' average story height (9' for Multiples and Motels, 10' for Lodges).

Frame Interior Partitions				
Bath houses	14.15	18.40	23.95	31.00
Bed and breakfast inns	30.00	34.75	40.50	46.75
Guest cottages (cabins)	17.10	21.90	28.25	36.00
Guest houses	21.05	26.50	33.25	41.50
Lodges	30.25	41.00	56.00	76.00
Motels	29.50	36.75	46.00	58.00
Guest rooms only	29.75	36.00	43.75	53.50
Office apartment	32.00	35.75	39.75	44.50
Extended stay	27.50	31.25	35.50	40.25
Multiple residences	30.75	38.75	49.00	62.00
Senior citizen	32.00	38.25	45.75	55.00
Assisted living	42.75	46.75	52.00	57.00
Retirement community complex	59.50	67.00	76.00	85.50
Row/town houses (including party walls)	28.00	33.75	40.25	48.25
Senior citizen	28.75	34.00	40.25	47.25

Masonry Interior Partitions				
Bath houses	15.45	19.90	25.50	32.75
Bed and breakfast inns	31.75	36.75	42.25	49.00
Guest cottages (cabins)	18.40	23.50	30.00	38.00
Guest houses	22.55	28.25	35.25	43.75
Lodges	32.00	43.00	58.50	79.00
Motels	31.25	38.75	48.25	60.00
Guest rooms only	31.50	38.00	46.00	56.00
Office apartment	33.75	37.50	42.00	46.75
Extended stay	29.00	33.00	37.25	42.25
Multiple residences	32.50	40.50	51.50	64.50
Senior citizen	34.00	40.50	48.00	57.50
Assisted living	44.50	49.00	54.00	59.50
Retirement community complex	62.00	70.00	79.00	88.50
Row/town houses (including party walls)	29.75	35.50	42.25	51.00
Senior citizen	30.25	35.75	42.00	50.00

MEZZANINES – Apply to open mezzanine area.

Cost of miscellaneous items such as Mezzanine	4.41	5.22	6.19	7.32

PLUMBING – Apply to total floor area.

	1	2	3	4
Bath houses	10.60	13.45	17.15	21.75
Guest cottages (cabins)	11.95	14.90	18.40	22.85
Lodges, individual baths	8.93	12.25	16.80	22.90
Common baths	5.79	7.79	-----	-----
Motels	10.90	14.45	19.15	25.25
Guest rooms only	11.85	14.55	17.95	22.05
Office–apartment	3.79	7.19	12.30	19.90
Extended stay	12.10	14.00	16.20	18.80
Multiple residences	7.72	10.55	14.45	19.80
Senior citizen	9.06	11.10	13.65	16.80
Assisted living	11.65	14.65	18.50	23.30
Retirement community complex	12.50	16.00	20.50	26.25
Row/town houses	6.60	9.90	14.80	22.15
Senior citizen	6.85	9.72	13.85	19.65

Cost per fixture – Basement plumbing only. See Section UIP 3 for individual fixture costs.

	1	2	3	4
Motels	1160.00	1430.00	1780.00	2210.00
Residential occupancies	1080.00	1360.00	1710.00	2170.00
Drains and hydrants	193.00	290.00	424.00	635.00

SPRINKLERS – Apply to sprinklered area. Costs include all piping and meters to main but do not include tanks and pumps. Simple residential installations will cost $3.90 to $6.01 per square foot. For double sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost.

1,500	square feet	4.85	6.25	8.04	10.35
3,000		4.36	5.58	7.13	9.10
5,000		4.07	5.16	6.54	8.27
10,000		3.64	4.58	5.78	7.29
15,000		3.43	4.30	5.39	6.76
20,000		3.27	4.10	5.11	6.39
40,000		2.98	3.68	4.55	5.64
50,000		2.84	3.54	4.38	5.42
100,000		2.56	3.15	3.87	4.77
150,000		2.46	2.98	3.62	4.39
200,000		2.33	2.81	3.43	4.15

ELECTRICAL AND LIGHTING – Apply to total floor area.

Few Outlets:				
Nonmetallic	4.10	4.82	5.64	6.63
Armored cable (BX)	4.85	5.69	6.67	7.84
Flexible conduit	5.82	6.79	7.93	9.24
Rigid conduit	6.92	8.06	9.37	10.90
Average Number of Outlets:				
Nonmetallic	6.23	7.41	8.80	10.45
Armored cable (BX)	7.40	8.77	10.40	12.40
Flexible conduit	8.74	10.35	12.30	14.65
Rigid conduit	10.35	12.25	14.55	17.30
Many Outlets:				
Nonmetallic	9.46	11.40	13.75	16.65
Armored cable (BX)	11.10	13.45	16.20	19.60
Flexible conduit	13.10	15.85	19.15	23.20
Rigid conduit	15.45	18.70	22.60	27.50
Unfinished Areas:				
Nonmetallic	1.94	2.49	3.17	4.05
Armored cable (BX)	2.46	3.06	3.83	4.79
Flexible conduit	3.03	3.74	4.58	5.64
Rigid conduit	3.76	4.54	5.50	6.64

Typical costs for some occupancies: See Page 8 for Chandeliers.

	1	2	3	4
Bath houses	6.35	9.49	14.20	21.30
Guest cottages (cabins)	7.15	10.80	16.20	24.45

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2

(SEGREGATED COST METHOD)

Typical costs for some occupancies (Continued)

Lodges	5.50	11.90	21.45	35.75
Motels	7.87	11.55	17.00	24.95
Guest rooms only	8.27	12.00	17.55	25.50
Office apartment	4.54	7.25	11.25	17.30
Extended stay	9.50	11.85	14.70	18.35
Multiple residences	5.83	8.24	11.65	16.50
Senior citizen	8.49	11.20	14.70	19.30
Assisted living	9.43	12.75	17.30	23.45
Retirement community complex	9.78	13.65	19.00	26.50
Row/town houses	4.66	7.04	10.60	16.00
Senior citizen	5.67	7.90	10.95	15.25

HEATING, COOLING AND VENTILATION – Apply to total floor area. Add or deduct 3% for each foot of variation in average story height from 8' base. For high-vaulted ceilings, use wall height plus 1/2 the height from eaves to ridge to determine effective height.

Costs are given for gas fired heating systems. Add or deduct as follows for other fuels:

Oil fired +7% Coal, stoker +7% Coal, hand fired -2%

Heating only	**1**	**2**	**3**	**4**
Electric, cable or baseboard	3.24	4.23	5.50	7.16
Radiant panels	3.08	3.85	4.80	6.00
Electric wall heaters	1.66	2.05	2.52	3.08
Forced air	3.57	4.73	6.28	8.29
Hot water, baseboard or convectors	6.26	8.18	10.75	14.05
Radiant floor	6.07	8.24	11.25	15.25
Radiant heat, gas, suspended	1.74	2.39	3.27	4.48
Space heaters, gas, with fan	1.34	1.92	2.77	3.99
Steam radiator, with boiler	5.66	7.22	9.19	11.75
Without boiler	4.48	5.88	7.73	10.15
Wall or floor furnace	1.92	2.31	2.77	3.34
Add for wood–burning furnace (exterior, add 55%)	1.41	1.77	2.24	2.81
Heating and Cooling				
Zoned A.C., hot and chilled water	14.40	17.85	21.90	27.00
Warm and cooled air	8.74	11.25	14.40	18.55
Package heating and cooling, short ducts	5.85	7.94	10.75	14.60
Heat pump system	6.48	8.78	11.90	16.15
Add for ground loop heat source	1.94	2.56	3.37	4.41
Individual thru wall heat pumps	3.08	4.36	6.19	8.74
Cooling Only				
Evaporative coolers	3.15	3.76	4.46	5.30
Refrigerated air conditioning only, zoned system	6.07	7.79	10.00	12.90
Package unit, short ducts	4.32	5.42	6.81	8.52
Ventilation only, with ducts and blowers	1.13	1.41	1.75	2.20
simple exhaust fan and air inlets only	0.65	0.84	1.06	1.34
Add for air to air heat exchange system utilizing heating ducts	1.41	1.74	2.17	2.67

EXTERIOR WALL – Apply to total wall area.

Concrete or Masonry Walls

	1	**2**	**3**	**4**
Adobe or hollow clay block, 6''	30.25	33.50	37.00	41.00
8"	32.75	36.50	40.25	44.75
12"	37.00	41.00	45.50	50.50
14"	41.00	45.50	50.00	56.00
Adobe block, grouted or cavity, 22" – 24"	47.25	52.00	58.50	65.00
30" – 32"	51.00	57.00	63.00	69.50

EXTERIOR WALL – Apply to total wall area.

Concrete or Masonry Walls

	1	**2**	**3**	**4**
Block, concrete, 6"	26.50	29.25	32.25	35.75
8"	28.50	31.50	35.00	38.50
12"	32.50	36.00	39.75	43.50
16"	36.50	40.25	44.25	49.00
for each addl 4" of block, add	4.08	4.44	4.84	5.29
Block, grouted or cavity, 10" – 12"	30.75	34.00	37.50	41.00
*Add for ornamented face block	2.02	3.03	4.53	6.77
Brick, block backup, 8"	34.50	37.75	41.75	46.00
12"	38.25	42.25	46.50	51.50
16"	42.25	46.50	51.00	57.00
Brick, common, 8"	38.25	42.25	46.75	51.50
12"	46.00	51.00	56.50	62.50
16"	54.00	60.00	66.00	73.00
For each addl 4" of brick, add	7.83	8.65	9.54	10.50
Brick, grouted or cavity, reinforced, 9" – 10"	41.75	46.00	51.00	56.00
Block backup, 9" – 10"	38.25	41.75	46.00	51.00
Block backup, 12" – 14"	41.75	46.00	51.00	56.00
Brick, 6" SCR modular	29.00	32.25	36.00	40.00
8"	32.25	36.00	39.75	44.00
*Add for face brick	4.31	4.73	5.19	5.69
Concrete, reinforced, formed, 4"	29.75	33.00	36.50	40.25
6"	32.00	35.50	39.25	43.25
8"	34.50	37.75	41.75	46.00
12"	39.00	43.00	47.25	52.00
For each addl 4" of concrete, add	4.55	5.00	5.49	6.02
Precast panels, 2"	24.65	27.50	30.25	33.50
4"	26.25	29.00	32.00	35.50
6"	28.75	31.75	35.25	39.00
8"	32.00	35.25	38.50	42.50
12"	37.50	41.00	44.75	49.00
Tilt–up panels, 4"	24.70	27.50	30.75	34.25
6"	26.50	29.50	33.00	36.75
8"	28.50	31.75	35.75	39.75
10"	30.75	34.50	38.50	43.00
Add for insulated sandwich	2.28	2.81	3.47	4.31
Add for brick or tile inserts	8.47	10.45	12.90	15.85
Glass block, white or aqua	65.50	70.50	75.50	81.50
Colors or reflective	87.00	93.00	98.50	106.00
Local stone, block backup, Ashlar veneer 12"	61.00	68.50	77.00	86.50
Rubble or rustic, 12" veneer,	49.00	56.00	63.50	72.00
For each 4" variation in thickness	4.08	4.44	4.84	5.29
Local fieldstone, in mortar, 12"	40.25	46.50	53.50	62.00
For each 4" variation In thickness	3.66	4.24	4.90	5.69
Local stone, rough cut, solid, 12"	65.00	79.50	96.50	119.00
Granite	69.00	87.00	111.00	140.00
Limestone	74.00	90.00	110.00	132.00
For each 6" variation in thickness	30.00	35.75	42.25	49.75

***NOTE:** The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face or synthetic masonry veneer, see Wall Ornamentation on Page 6.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Concrete or Masonry Wall Extras

	1	2	3	4
Rammed earth, soil cement, 24”	32.50	37.50	43.50	50.50
Pneumatic build–up, formed one side	51.00	58.00	65.50	74.00
For each 6” variation in thickness	1.87	2.21	2.58	3.01
Tile, structural clay, 6”	28.50	31.50	35.25	39.25
10”	33.25	36.75	41.00	45.50
Add for stay–in–place forming	1.56	2.08	2.77	3.70
Add for glazed block/tile, each side	8.75	9.77	10.90	12.20
Add for pilasters	1.63	1.99	2.45	2.98
Add for bond beams	1.74	2.09	2.54	3.04
Add for seismic reinforcement	0.75	1.21	1.90	2.94
Add for synth. plaster on rigid insulation (EIFS)	7.09	8.65	10.55	12.85
Deluxe, textured or aggregate	11.55	13.80	16.35	19.55
Add for thin masonry on rigid insulation	17.35	19.55	21.85	24.45
Add for clay tile backup in lieu of block	3.01	3.57	4.25	5.04
Add for earth–sheltered waterproofing	1.31	2.10	3.32	5.13
Add for insulation	1.08	1.56	2.25	3.24
Earth–sheltered structures	1.95	2.87	4.24	6.24
Add for insulated glazing	1.08	3.16	6.28	10.95
Add for impact resistant glazing	2.12	2.52	2.97	3.50

Curtain Walls

	1	2	3	4
Brick or tile panels	37.25	43.75	52.50	61.50
Concrete and glass panels, precast	44.50	51.50	59.00	67.50
Glass fiber reinforced, molded	38.25	46.75	57.50	70.00
Metal and glass panels (ordinary)	49.75	58.00	68.50	80.50
Stainless steel or bronze and glass	71.00	82.50	95.00	110.00
Stone panels, local stone	64.00	70.50	78.00	86.00
Granite	71.00	80.50	90.50	103.00
Limestone or slate	67.00	73.50	81.00	88.50
Marble	67.50	76.50	87.00	99.50
Composite or aggregate panels	46.00	56.50	69.50	85.50
Structural glazed atrium (including supports)	115.00	150.00	199.00	261.00
Steel studs and stucco	26.25	30.75	35.75	41.50
Synthetic plaster on rigid insulation (EIFS)	29.75	35.75	42.75	51.50
Deluxe, textured or aggregate	34.75	41.25	48.50	58.00
Wood or aggregate board siding	26.00	31.50	38.25	46.50
Add for insulation, insul. areas only	1.44	2.14	3.12	4.58

Pre-engineered Walls

Sandwich panels, alum. or steel, both sides	28.50	32.75	37.50	43.50
Cement fiber or shotcrete, two sides	21.20	25.50	30.75	37.25
Fiberglass panels, two sides	28.00	33.00	39.00	46.00
Glass exterior, metal interior	32.00	36.75	42.25	48.50
Add for stainless steel or textured (Galbestos)	4.49	5.39	6.47	7.75
Add for polylaminated (FRP) interior	1.09	1.40	1.78	2.30
Deduct for gypsum or hardboard interior	2.00	2.18	2.37	2.58
Prefabricated building panels, aluminum or steel and glass panels	39.75	43.75	48.00	53.00
Add for porcelain enamel finish	3.99	4.74	5.61	6.66
Add for block backup	8.07	9.12	10.30	11.65
Stucco on steel panel	48.25	53.00	58.00	63.50
Veneer, block or brick, on steel panel	52.50	58.00	64.00	71.00
stone, rubble or rustic	63.50	69.50	76.50	83.00

EXTERIOR WALL (Continued)

Single-Wall Construction

	1	2	3	4
Aluminum or steel, on steel frame	11.15	13.45	16.30	19.65
On wood frame	9.71	11.85	14.35	17.50
Add for porcelain enamel finish	3.99	4.74	5.61	6.66
Add for stainless steel or textured (Galbestos)	4.49	5.39	6.47	7.75
Asphalt siding on wood frame	8.27	9.55	11.00	12.75
Cement fiber (Transite), on wood frame	11.60	13.75	16.35	19.50
Sheet siding, on wood frame	10.50	12.55	15.05	17.95
Siding or shingles, on wood frame	11.35	13.45	15.90	18.85
Fiberglass light panels, on steel frame	8.84	10.05	11.40	12.95
Sandwich panels	10.55	11.55	12.70	13.90
Heavy, (FRP), over 8 oz.	13.40	15.70	18.40	21.50
light panels on wood frame	7.75	8.81	10.00	11.40
sandwich panels	9.46	10.35	11.30	12.35
Heavy, (FRP), over 8 oz.	12.30	14.45	17.00	20.05
Glass panels	33.00	41.50	52.50	66.50
Projected greenhouse	68.50	76.50	85.50	96.00
Log, up to 10” diameter	27.00	35.25	45.75	59.50
Deluxe, hand hewn or oversized	39.50	48.50	61.00	75.00
Plywood, boards or siding, on steel frame	11.25	13.40	16.00	19.10
On wood frame	9.82	11.80	14.10	16.90
Stucco, on baled straw	22.10	26.75	32.50	39.50
Stucco, on wood frame	11.35	13.15	15.25	17.75
Synthetic plaster on rigid insulation (EIFS), on steel frame	16.05	19.00	22.30	26.25
Wood shingles, on wood frame	11.35	13.30	15.50	18.05
Add for exterior sheathing, per layer	1.66	1.90	2.20	2.52
Add for interior sheathing or liner, finished	2.92	3.45	4.05	4.77
Polylaminated panel (FRP)	3.99	4.73	5.57	6.59
Add for stud wall backing	1.06	1.28	1.55	1.87
Add for insulation	1.05	1.25	1.49	1.78
Vinyl faced, exposed	1.33	1.49	1.66	1.87
Rigid board, faced	1.74	2.28	2.99	3.92
Add for air infiltration wrap	0.25	0.34	0.46	0.60
Add for insulated glazing	1.10	3.23	6.44	11.20
Add for impact resistant glazing	2.18	2.56	3.02	3.58

Wood or Steel Stud Walls

	1	2	3	4
Aluminum or steel siding, horizontal	21.90	26.00	31.00	36.75
Sheet panels	19.75	23.70	28.50	34.25
Asphalt siding	19.25	22.60	26.75	31.50
Cement fiber siding or shingles, Horizontal	21.20	25.25	30.25	36.00
Sheet, embossed	20.20	23.80	27.75	32.75
Hardboard siding or shingles, Horizontal	20.90	24.60	29.00	34.00
Sheet, embossed	19.95	23.45	27.50	32.25
Plywood, textured	18.95	22.30	26.25	31.00
Deluxe, redwood, cedar, etc	21.15	24.95	29.50	34.75
Shingles or shakes, wood	21.35	25.50	30.25	36.25
Stucco	21.65	25.75	30.75	36.75

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Wood or Steel Stud Walls	1	2	3	4
Synthetic plaster on rigid insulation (EIFS)	25.50	30.50	36.50	43.50
Deluxe, textured or aggregate	32.00	37.50	43.75	51.50
Vinyl siding	19.90	24.10	29.00	35.25
Wood siding	20.60	24.25	28.50	33.50
Deluxe, redwood, cedar, etc	22.35	26.75	31.75	38.25
Log, veneer siding	23.95	30.25	38.00	48.00
Deluxe, half round, full corners	38.25	43.00	48.25	55.00
Veneer, face block or concrete brick	27.25	32.00	37.50	44.25
Common brick	27.50	32.75	38.75	45.75
Face brick	31.50	37.25	43.50	51.50
Mortarless brick	31.75	37.25	43.00	50.50
Stone, ashlar veneer	48.50	58.00	68.00	80.50
Rubble or rustic	38.75	45.75	55.00	65.00
Synthetic veneer or panel	27.50	34.25	42.25	53.00
Thin veneer on rigid insulation	33.25	39.00	46.00	54.00
Add for sheathing	1.38	1.68	2.05	2.49
Add for seismic/wind bracing	0.80	0.94	1.12	1.34
Add for insulation	1.00	1.21	1.44	1.74
Add for air infiltration wrap	0.32	0.41	0.52	0.65
Add for air space wrap	1.00	1.13	1.28	1.44
Add for double stud walls	2.14	2.56	3.08	3.71
Add for wood stresskin sandwich panels	6.19	7.34	8.69	10.30
Add for insulated glazing	1.10	3.23	6.44	11.20
Add for impact resistant glazing	2.18	2.56	3.02	3.58
Deduct for garage shingle wall	11.30	13.25	15.55	18.25

BASEMENT WALLS – Apply to basement wall area.

Concrete block, reinforced, 6”	13.80	15.70	17.95	20.45
8”	15.30	17.60	20.10	23.00
12”	19.55	22.10	25.00	28.50
for each additional 4” of block, add	4.09	4.48	4.91	5.40
Concrete, reinforced, 6”	16.15	18.65	21.40	24.50
8”	18.50	21.10	24.05	27.50
12”	22.85	26.00	29.25	33.25
16”	27.50	31.00	35.00	39.25
For each additional 4” of concrete, add	4.65	5.07	5.55	6.04
Masonry, brick, 8”	23.25	26.50	30.00	34.25
Stone, 12”	32.25	37.75	44.00	51.50
For each 4” variation in thickness	7.91	8.79	9.77	10.85
Wood, treated	12.25	15.65	19.95	25.50
Add for stay–in–place forming	0.84	1.25	1.87	2.80
Add for waterproofing	1.34	1.69	2.17	2.74
Earth sheltered structures	2.12	3.09	4.52	6.63
Add for insulation	1.05	1.52	2.22	3.23
Earth sheltered structures	2.02	2.92	4.23	6.14

For specific earth-sheltered waterproofing, see Section UIP 1.

STAINED GLASS – Apply to art glass for window, dome or skylight area. These costs vary greatly, and the following typical cost ranges should be used with caution. See Section UIP 6 for complete description and detailed costs. For residential straight seams or simple bevel, deduct 50% from Low Cost. For ceiling domes, use low cost range for plastic, average for stock glass and high cost for custom stained glass.

Low cost, plain, min. work or detailed bevel etched	100.00	137.00	186.00	255.00
Average, simple figures and scenes	312.00	417.00	565.00	760.00
High cost, highly detailed work	680.00	945.00	1330.00	1860.00

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face, Rom./Norman	15.25	17.60	20.35	23.50
face, standard size	16.35	19.15	22.25	26.00
Mortarless brick	17.60	20.10	23.15	26.50
Select common	14.90	17.30	19.95	23.15
Used	16.15	18.65	21.50	24.80
Sim. ven. or panel, 1/4”- 3/8”	13.05	15.85	19.30	23.50
Thin veneer on rigid insulation	17.75	19.90	22.25	24.95
Add for pictorial carved artwork	209.00	239.00	276.00	312.00
Cement fiber siding	4.15	5.04	6.13	7.43
Concrete, ornamental cast stone	33.25	39.75	48.00	57.50
Concrete block, imitation flagstone	13.30	15.55	18.25	21.35
Solar screen	14.30	16.85	19.80	23.30
Ornamented face, slump, fluted, split or ground	14.25	16.60	19.15	22.10
Glazed one side, add	8.90	9.94	11.10	12.40
Cut stone, carved	141.00	206.00	296.00	430.00
Glass block, white or aqua	55.00	61.00	67.50	74.50
Colors or solar reflective	76.50	84.00	91.50	100.00
Granite, ashlar or panel	69.50	80.50	93.50	108.00
Limestone, ashlar or panel	50.50	59.50	70.50	83.00
Local stone, ashlar veneer or panel	43.50	51.50	61.00	71.50
Rubble or rustic	32.50	38.75	46.50	55.50
Imitation precast stone	14.55	18.95	24.60	32.00
Marble, panels	57.50	67.00	78.00	91.50
Metal panels, screens, louvers	25.50	32.50	41.50	53.50
Preformed wall panels	4.24	7.56	12.50	19.90
Add for curved panels	1.25	1.80	2.61	3.76
Ornamental doorways	80.50	174.00	315.00	525.00
Slate, panels	48.50	56.50	65.50	76.00
Stucco	5.33	5.98	6.69	7.50
On masonry	4.15	4.77	5.45	6.26
Add for synthetic on rigid Insulation (EIFS)	3.34	4.27	5.47	6.98
*built–up (EIFS) panel relief	7.16	9.24	11.95	15.40
Terra cotta	38.25	45.25	54.00	63.50
Tile, ceramic	19.10	21.95	25.25	29.00
*Mosaics	28.25	34.50	41.50	51.00
Hand painted tiles	143.00	200.00	280.00	392.00
Vinyl siding	4.41	5.30	6.38	7.68
Vitrolite (structural glass)	31.75	36.75	43.00	50.50
Wood, plywood	3.36	4.30	5.49	7.04
Shingles	4.86	5.81	6.94	8.30
Siding	4.34	5.42	6.78	8.46
Ornamented molding or trim	12.90	18.20	25.75	36.50
Add for treated wood	0.72	0.86	1.03	1.25
*Note - For pictorial artwork, add	15.25	21.30	29.75	41.50

For security shutters, bars or liquid crystal glazing, see Section UIP 5.

EXTERIOR AND BASEMENT STAIRS – Per riser. Fire escapes, see Section UIP 5.

Concrete	246.00	336.00	463.00	640.00
Steel pans or prefab. concrete				
On steel	276.00	373.00	499.00	680.00
Steel or aluminum grating	320.00	424.00	550.00	730.00
Wood	90.50	140.00	214.00	325.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2
(SEGREGATED COST METHOD)

ROOF STRUCTURE – Apply to roof area.

	1	2	3	4
Concrete joists, slab	15.00	16.80	18.80	21.05
Lift slab	13.75	15.20	16.85	18.75
Pan or waffle slab and joists	13.95	15.50	17.15	19.10
Precast joists and deck	13.15	14.65	16.30	18.25
Precast joists, wood deck	10.40	11.55	12.85	14.30
Cored plank on bearing walls	11.65	12.95	14.40	16.00
Thin shell	21.85	26.00	31.00	37.00
Concrete dome, cast–in–place	49.00	55.00	61.50	68.50
Thin shell	32.00	36.75	42.25	48.25
Steel joists, concrete slab	17.35	19.65	22.10	24.95
Gypsum on formboard	8.81	11.00	13.75	17.25
Precast deck	15.55	17.35	19.45	21.60
Steel deck	9.49	11.95	15.10	19.00
Light-gauge truss joist	7.82	10.00	12.85	16.50
Steel deck, gypsum or concrete	12.20	15.10	18.65	22.90
Wood or composition deck	7.38	9.45	12.10	15.50
Light–gauge truss joists	6.55	8.43	10.85	14.00
Open steel system for corrugated metal	3.81	5.40	7.67	10.90
Light purlin supports only	1.77	2.31	3.02	3.95
Steel space frame and Sheathing (three dimen.)	28.25	36.75	47.50	61.50
Architectural (exclusive of glazing)	44.50	67.50	102.00	152.00
Metal dome and cover	38.50	44.00	50.00	57.50
Glazed or translucent panels	87.50	105.00	124.00	147.00
Wood joists, wood or composition deck	6.17	8.04	10.50	13.75
Exposed rafters, 2” T&G sheathing	9.40	11.85	14.90	18.70
Prefab. panels (excl. of girders)	2.56	3.18	3.96	4.92
Stresskin sandwich panels (exclusive of purlins)	9.25	11.90	15.30	19.80
Add for snow roof, furred sheathing layer	2.74	3.01	3.30	3.61
Open wood system for corrugated metal	2.26	3.83	6.18	9.71
light purlin supports only for metal, wood or fiberglass	1.08	1.40	1.83	2.40
Wood dome and deck	28.50	34.00	40.75	48.75
Add for seismic/hurricane truss ties	0.50	0.60	0.74	0.88
Add for complex roof, turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER – Apply to roof area.

Aluminum or steel, corrugated, crimped or tile panels,				
Preformed, light, to 26 gauge	2.67	3.47	4.55	5.97
Heavy, under 26 gauge	5.52	6.41	7.47	8.69
Formed seam, flat or standing	7.15	8.95	11.25	14.05
batten seam	8.37	10.40	12.95	16.05
Sandwich panels, pre–engineered	11.40	14.55	18.60	23.70
Shingles	5.45	6.69	8.22	10.05
Aggregate finish	7.08	8.65	10.55	12.95
Thatch	23.35	26.00	28.75	31.75
Add for interior metal liner	2.45	2.90	3.43	4.06
Plastic	2.42	2.83	3.34	3.92
“Add for porcelain enamel finish “	3.99	4.74	5.61	6.66
Add for stainless steel or textured (Galbestos)	4.49	5.39	6.47	7.75
Asphalt, corrugated	2.21	2.61	3.08	3.65
Atrium skylight, frame and glazing	45.25	62.00	84.00	115.00
Built up composition	2.62	3.36	4.29	5.48
Cement fiber shingles	5.66	7.16	9.06	11.50
Corrugated or sheet (Transite)	5.33	7.59	10.75	15.30
Composition, roll, mineral surface	1.44	1.74	2.09	2.52

ROOF COVER (Continued)

	1	2	3	4
Composition shingles, light, to 235#	2.34	2.70	3.11	3.61
Heavy over 235# or laminated	2.99	3.89	5.07	6.59
Copper, flat or standing seam	15.45	18.40	21.80	26.00
Batten seam	16.80	19.90	23.55	27.75
Shingles	15.40	17.00	18.70	20.65
Elastomeric or modified bitumen,				
Single ply	4.33	5.85	7.90	10.65
Reinforced sheet or spray, fluid coat	7.82	9.24	10.90	12.90
Fiberglass, corrugated or sheet, light	2.76	3.27	3.90	4.64
Sandwich panels	4.49	5.29	6.23	7.32
Heavy, FRP, over 8 oz	5.24	6.78	8.75	11.30
Slate	10.80	13.05	15.75	19.10
Red	20.35	24.80	30.25	36.75
Composite reinforced fiber	7.16	8.90	11.05	13.75
Terne, flat or standing seam	15.15	17.90	21.05	24.80
Batten seam	16.30	19.25	22.70	26.75
Tile, clay	9.65	12.50	16.15	20.90
Concrete	7.10	8.37	9.86	11.60
Plastic or rubber	6.26	7.32	8.55	9.99
Add for custom coloring or glazing	1.74	2.24	2.86	3.67
Wood, shakes	5.03	5.86	6.84	7.96
Shingles	4.67	5.52	6.54	7.75
Fiber shingles	3.08	3.73	4.49	5.42
Add for fire–resistant finish	0.75	0.90	1.08	1.28
Add for roof insulation	1.28	2.03	3.12	4.79
Earth sheltered structures	2.40	3.65	5.52	8.31
Add for earth sheltered waterproof	2.11	3.03	4.41	6.39

NOTE: For underroof insulation supporting structures, see Ceiling Extras on Page 3. For earthen roof cover, see Fill costs on Page 1. See Section UIP 13 for top dressing, sod and/or sprinklers. For specific earth-sheltered waterproofing, see Section UIP 1.

ROOF MODIFIERS – Use the following multipliers for sloping roofs to convert the unit costs to cost per square foot of horizontal roofed area.

	Rise	:	Run	Multiplier
Less than	3’	:	12’	1.00
	3’	:	12’	1.03
	4’	:	12’	1.06
	5’	:	12’	1.08
	6’	:	12’	1.12
	8’	:	12’	1.20
	12’	:	12’	1.42
	15’	:	12’	1.60
	18’	:	12’	1.80

TRUSSES AND GIRDERS – Apply to area supported.

Steel trusses or longspan girders	3.27	4.21	5.42	6.97
Timber trusses	3.58	4.59	5.89	7.56
Glued, laminated trusses or girders	3.51	4.38	5.48	6.85

EXTERIOR BALCONIES - Apply to balcony area.

Concrete	31.00	39.25	50.00	64.00
Steel	30.25	40.00	53.50	71.50
Wood	25.50	33.75	44.75	59.50
Add for ornate finishes, balustrades	26.75	32.75	40.50	50.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS

SECTION SEG 2

(SEGREGATED COST METHOD)

CANOPIES OR MARQUEES – Apply to horizontal area. For light false-mansard structures, deduct 50%. For greater detail, see Section UIP 4 or 6. Patio covers, see Section UIP 13.

Wood frame	32.75	40.50	50.00	62.50
Steel frame	40.75	51.50	65.00	83.00

DORMERS – See Section UIP 4, Roofs; for solar rooms, see Section UIP 11.

ARCHITECTURAL COLUMNS – See Section UIP 6.

For small apartment or residential type elevators, dumbwaiters and inclined railways, see Section UIP 7.

For lobby equipment, telephone systems, exercise equipment, see Section UIP 12.

For complete kitchen units, see Section UIP 2. Commercial washer dryers, see Section UIP 12.

BUILT-IN CONSTRUCTION – Apply to each item.

	1	2	3	4
Appliance allowance (if not itemized),				
Single family	1,820	4,150	7,550	1,2800
High value residence				
(excl. automation, security)	20,000	27,200	37,200	50,500
Row/town houses	1,820	3,375	5,650	9,050
Multiple residences, per unit	1,310	2,210	3,550	5,600
Senior citizen, multiple and town house,				
per unit	1,310	1,660	2,120	2,700
Single unit (self–contained) kitchen	3,925	5,000	6,300	7,950
Garbage disposal	160	226	323	452
Deluxe, heavy duty	484	605	750	935
Range and oven combination	820	1,110	1,490	2,030
Residential, commercial quality	4,500	5,700	7,200	9,000
Custom, double wide	10,300	13,600	17,700	23,300
Microwave or refrigerated				
Combination	2,170	2,575	3,025	3,600
Range top	439	700	1,090	1,670
Component top, per component	580	815	1,160	1,640
Steamer	770	1,210	1,860	2,850
Induction top	1,160	1,590	2,220	3,050
Custom tops	3,050	4,325	6,250	8,900
Ovens	775	1,190	1,800	2,700
Custom double wall ovens	2,575	4,750	8,000	13,000
Microwave combination	2,070	2,600	3,250	4,050
Warming ovens	845	1,010	1,190	1,410
Oven, microwave	194	445	815	1,390
Exhaust fan and hood	200	362	605	975
Countertop down draft	1,030	1,270	1,570	1,940
Custom, stainless steel or copper	2,575	4,325	7,050	11,000
Cookware racks	258	565	1,030	1,710
Dishwasher	452	685	1,030	1,550
Deluxe, built–in	1,620	2,040	2,575	3,250
Individual drawers, built–in, each	1,300	1,620	2,050	2,575
Trash compactor	650	775	935	1,140
Radio–intercom, base system	530	685	885	1,150
Add per satellite	115	140	167	203
Audio/video entry system	3,500	4,850	6,750	9,250
Each extra monitor station	990	1,180	1,410	1,670
Refrigerator or freezer	680	1,310	2,250	3,650
Deluxe, built–in, each	3,600	5,100	7,250	10,300
Individual drawers, built–in, each	3,925	5,000	6,350	8,000

MISCELLANEOUS BUILT-IN CONSTRUCTION (Continued)

	1	2	3	4
Mixer blender				
(food center, processor)	323	550	880	1,390
Deluxe, built–in	1,420	1,990	2,775	3,850
Can opener, built–in	77	105	144	194
Coffee maker, built–in	258	394	595	885
Toaster, built–in	160	207	264	343
Towel/food wrap dispenser, built–in	245	284	330	381
Wok or deep fryer, built–in	770	935	1,150	1,400
Deluxe	1,670	2,260	3,025	4,050
Kitchen hot–food heat lamps, each	458	520	600	685
Motorized pantries, 1' to 3'	5,700	6,850	8,100	9,750
Wine captains, undercounter	1,220	1,410	1,630	1,870
Standing units	2,975	3,500	4,050	4,725
Ice machines, residential	740	885	1,070	1,310
Deluxe, to 50# per day	1,300	1,640	2,120	2,700
Bathroom heater, electric	149	213	316	458
Mirror defog heaters	77	111	157	226
Hair dryer	97	145	216	323
Heated towel rack	515	1,170	2,160	3,625
Exhaust fan	149	200	277	375
Bathroom scale, built–in	251	284	323	362
Vacuum cleaner system, three inlets	2,070	2,300	2,550	2,825
Add for extra inlets	232	277	330	387
Ironing center	890	745	1,310	1,080
Clothes washer, single–family	1,150	725	1,480	910
Deluxe	1,810	1,620	2,030	2,270
Add for pedestals	219	251	296	343
Dryer	640	1,190	785	970
Deluxe	1,800	1,510	1,080	1,280
Drying center	1,900	1,740	1,620	2,070
Combination unit	2,360	3,075	1,400	1,810
Water softener	1,680	2,230	2,950	3,850
Complete filtration system	7,500	10,100	5,700	4,225
Closet carousels	4,200	5,100	6,150	7,400
Safe, built–in, small wall or floor	540	820	1,260	1,890
Deluxe	1,910	3,300	5,350	8,350
Residential security system				
Wireless	1,070	1,980	3,300	5,300
Hard wired	2,975	4,175	5,850	8,200
Home automation systems	3,400	4,275	5,450	6,950
Custom including security				
system	12,800	17,700	24,800	34,400
Trash compactor, apartment or motel	6,300	15,100	28,500	48,500
Gas incinerator	1,190	1,370	1,570	1,800
House phone, located at entrance	680	790	925	1,090
Add per door release	207	226	251	277
Intercom, master station,				
20–30 station	1,330	1,720	2,250	2,925
Add per intercom outlet or remote				
Station	154	180	207	239
Add per door release	219	239	258	277
Television security, closed circuit:				
One camera and one monitor,				
Base system	2,000	4,350	7,900	13,300
Each extra camera	770	1,980	3,750	6,500
Each extra monitor	323	505	770	1,180
Video tape recorder	3,075	4,525	6,800	10,100

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

MULTIPLES AND MOTELS
SECTION SEG 2
(SEGREGATED COST METHOD)

MISCELLANEOUS BUILT-IN CONSTRUCTION (Continued)

	1	2	3	4
Home entertainment, audio–video systems:				
Built–in and/ or including cabinets	15,000	31,800	56,750	94,250
Complete home (including security and automation system)	36,500	63,750	104,000	165,000
Home theater, (screening room) wall and sound treatments, stage, screen, seating, audio and projection equipment:				
Prefab. package units, complete	41,400	57,000	79,000	109,000
Custom–built theater and decor	275,000	330,000	395,000	472,000
Built–in aquarium (excl. fish and plants, etc.)	5,950	11,000	18,300	29,500
Bowling alley, reconditioned, with automatic pinsetter, (new, add 30%)	28,900	36,100	44,800	56,000
Golf course simulator, complete station including projection equipment	6,500	18,600	37,100	64,500
Racquetball court, prefab., complete	48,100	55,000	62,750	71,500
Add for spectator viewing, window/ wall	13,900	26,800	46,300	75,250
Shooting range, indoor, per station, complete	15,400	17,600	20,100	23,000
Soda fountain, complete unit, per linear foot	1,740	1,990	2,260	2,575
Wine vaults, modular room, 15 to 75 sq. ft.	3,400	5,500	8,650	13,500
Sauna rooms, 15 to 100 sq. ft.	3,725	5,950	9,250	14,200
*Chandeliers, high–value	10,400	16,600	26,000	40,200
Add for winch, 200 to 300 lb. capacity	1,810	2,050	2,320	2,625

***NOTE:** Fixtures classified by age or beauty as having antique or historical value, or designed by name artists, must be valued as art objects by fine arts specialists; costs can easily run seven to ten times the listed costs for chandeliers and two to four times mantel costs.

FIREPLACES – Cost per fireplace. For each additional opening using the same chimney, add 30% to 50% (custom, 20% to 40%). Buildings with basements, add 40% (custom, 25%) to extend the foundation to the basement level. “Steel, with flue” is the prefabricated hanging or free-standing-type fireplace or stove.

	1	2	3	4
One story	3,575	5,300	7,800	11,600
Add per additional story of chimney flue	960	1,290	1,720	2,310
Steel, with flue	1,900	2,700	3,800	5,400
Pellet stoves	3,750	4,650	5,800	7,150
Add per additional story of chimney stack	424	640	950	1,430
Direct vent	2,210	3,100	4,350	6,100
Custom or oversized, one story	13,300	17,400	22,800	29,800
masonry heaters, soapstone, etc.	12,400	20,300	31,800	49,400
Add per additional story of chimney flue	2,500	2,850	3,275	3,750
Steel, direct vent	5,500	7,050	9,000	11,600
Add for Heatilator type	535	715	950	1,270
Add for raised hearth	320	499	765	1,170
Add for log lighter	373	424	477	545

FIREPLACES (Continued)

	1	2	3	4
***Mantels, special designs or antique reproductions, add:**				
Cast stone (bonded limestone)	6,200	8,900	12,900	18,400
Custom marble, granite or onyx	11,400	18,000	27,800	42,400
Ornate wood, carved	6,200	7,000	7,900	8,850
Precast plaster	3,200	4,300	5,800	7,800

***NOTE:** Fixtures classified by age or beauty as having antique or historical value, or designed by name artists, must be valued as art objects by fine arts specialists; costs can easily run seven to ten times the listed costs for chandeliers and two to four times mantel costs.

COMPLETION OF BUILDING VALUATION

Contractors’ overhead and profit, sales taxes, permit, fees and insurance during construction are included in the costs above. Interest on interim construction financing is also included, but not financing costs, real estate taxes or brokers’ commissions.

Architects’ fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers which bring the basic costs up to date for each locality are found in the Appendix D.

Tract developments, where a large number of identical or similar row houses are built at one time, may effect savings in construction costs. However, in evaluating a single row house in a tract, the assessor must use his own judgment as to whether there was a saving which is pertinent to his specific appraisal.

Garages for single-family row houses and multiple dwellings have a relatively low cost in relation to the living units, and their construction is not usually complicated by plumbing, heating, etc. For this reason, they can easily be priced from the Calculator section. If a garage is of extraordinary construction, has interior finish, plumbing, or built-in features, it may be priced from the Segregated costs in this section or the Unit-in-Place costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

Stores, restaurants and other commercial buildings usually have fairly large open spaces designed to accommodate large numbers of people. The costs given are average costs of various components including the contractors' profit and overhead but not the architects' fees. They cover the basic construction of the building, including most items usually found in the general contract, but do not include furnishing and fixtures specific to a tenant, for example bars, kitchen equipment, counters or seating. Prices of these items may be found in Section UIP 12. They do include all fixed partitioning, ceilings, air conditioning ducts, flooring, etc.

Where several occupancies are found in one building, for example, apartments over a store building, the two portions should be priced separately from the appropriate sections, i.e., Section SEG 1 for the apartments and Section SEG 3 for the stores.

Foundations in Class A and B commercial structures can be priced accurately on a square foot of floor area basis. However, in light Class C, D and S buildings, the perimeter foundation may carry most or all of the load and the cost is generally proportional to the perimeter. These foundations may be better priced on the basis of a linear foot of bearing wall, with costs of column footings added if there are interior columns supporting a roof or floor load above.

Frame costs should be adjusted for partial bearing walls, as described in Section UIP 1, using a cost proportional to the load which is carried by the frame. If the frame members are visible and uniform enough to be easily measured and counted, they may be priced from Section UIP 1. When a complete frame cost is used, generally the trusses or girders would be included as the horizontal members of the frame. See explanations in Section UIP 1 or SEG INTRO. In single-story buildings where the frame supports only a light roof, Rating 1 might often be chosen, even in average buildings.

Interior construction varies widely in commercial structures. The costs given in Table I are only typical ranges and should be used with caution. Partitions may be measured and priced from Table II which includes a typical number of openings and covers only common types of partitions. If desirable, partition costs may also be built-up from Section UIP 2. However, the interior construction costs (Table I) also include miscellaneous cabinets, shelves, stairs and other items.

Plumbing in commercial buildings, such as stores, where costs can vary widely, are often best priced on a per fixture basis. Square foot costs given are typical ranges for complete plumbing costs.

Exterior wall costs and interior construction costs, with regard to shopping centers, do not include storefronts, signs or marquees which can be priced in detail from Section UIP 6.

SEGREGATED COSTS

(For explanation of the rating numbers, see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation (per cu. ft.)	0.47	0.62	0.83	1.10
Fill (per cu. ft. of compacted earth)	0.47	0.59	0.75	0.96
Site preparation (per sq. ft. of site)	0.35	0.49	0.63	0.83

FOUNDATION – Table I gives complete average costs per square foot of floor area. If a more detailed estimate is desired for Class C, D or S buildings with bearing walls, use Tables II and III as appropriate.

TABLE I. CONCRETE FOUNDATIONS – Apply to total floor area including basements, but excluding mezzanines or balconies.

Concrete Foundations for:

Class A	3.51	4.57	5.95	7.76
Class B	3.73	4.81	6.20	7.98
Class C, bearing wall	3.24	4.27	5.59	7.32
Nonbearing wall	3.13	4.11	5.36	7.02
Class D, masonry veneer	2.88	3.80	5.02	6.61
Siding or stucco	2.52	3.34	4.40	5.84
Pole-frame construction	2.38	3.11	4.10	5.36
Class S	2.53	3.35	4.45	5.90
Classes C, D and S light perimeter foundation for large, open-shell type structures	1.03	1.35	1.73	2.25
Add for perimeter insulation,				
Ground floor area only	0.15	0.24	0.37	0.57
earth-sheltered structures	0.19	0.32	0.53	0.83
Add for seismic base isolators	6.23	9.03	13.10	19.00
damping devices	2.53	3.45	4.71	6.42

CONCRETE FOUNDATIONS (Continued)

TABLE II. ALTERNATE METHOD – Apply to linear feet of continuous footings or foundation walls if Table I is not used. See discussion above.

Heavy grade beam/stem foot.	1	2	3	4
Class C	42.50	57.50	77.00	104.00
Class D, masonry veneer	38.25	51.50	70.00	94.50
siding or stucco	33.50	45.25	61.50	83.00
Class S	33.75	46.25	62.00	84.00
Light reinforced-grade beam, Classes C, D and S	26.00	35.75	48.75	67.00
Add for perimeter insulation	1.41	3.09	5.58	9.30
Earth-sheltered structures	2.11	4.54	8.19	13.65
Add for perimeter radon-control matting	4.21	5.01	5.95	7.07
Add for perimeter raised-floor skirting	12.45	14.50	16.85	19.65

TABLE III. CONCRETE COLUMN FOOTINGS – Apply to total number of columns if Table I is not used. Costs apply to one-story buildings. For others, add 20% for each story over one.

Concrete columns	82.00	137.00	218.00	340.00
Steel columns	74.00	126.00	202.00	319.00
Light pre-engineered frame	59.50	77.50	100.00	131.00
Light tubular/pipe frame	44.75	61.50	84.00	117.00
Wood columns	67.00	104.00	158.00	240.00
Light pole-frame	45.25	62.50	86.50	119.00

FOUNDATION ADJUSTMENTS – Apply to base cost used.

Add 2% for each foot over 12' average story height.

Deduct 2% for each foot under 12' average story height.

Deduct .8% for each story over one, above ground, for multi-story buildings.

For one story buildings with foundations and footings formed and poured monolithically with floor slabs, use 70% of the above costs, for that floor only.

Add for pilings from Section UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

FRAME – Apply to total floor area including basements, but excluding mezzanines.

	1	2	3	4
Bearing walls, wood or steel floor supports only	2.09	2.39	2.74	3.11
Masonry supports only	3.03	3.47	3.95	4.53
Steel, fireproofed, Class A	21.80	25.00	28.50	32.75
Composite concrete-steel, Class B	19.10	21.55	24.30	27.50
Concrete, reinforced, Class B	18.65	21.25	24.20	27.50
Precast, post-tensioned	17.95	20.20	22.70	25.50
Steel, Classes C and D	7.81	9.50	11.55	14.10
Class S	7.27	8.86	10.85	13.25
Light pre-engineered frame	4.60	5.62	6.85	8.36
Light tubular/pipe frame	2.74	3.51	4.53	5.82
Add for fireproofing	1.26	2.06	3.22	4.97
Steel columns, wood beams	5.25	6.76	8.70	11.20
Wood, A-frame construction	6.08	7.28	8.70	10.40
Laminated bents and arches	6.90	8.22	9.76	11.65
Light arch-rib construction	4.42	5.31	6.40	7.69
Mill-type (heavy timber) construction	7.16	8.55	10.20	12.25
Heavy timber/log construction, architectural	14.40	17.85	22.15	27.50
Post and beam construction	5.09	6.05	7.18	8.53
Light pole-type construction	2.91	3.61	4.49	5.59
Add for seismic/wind bracing, Class A and B	3.59	5.21	7.55	10.95
Open Class C, D and S frames	1.18	1.48	1.86	2.34
damping devices	1.61	2.11	2.76	3.62

FRAME ADJUSTMENTS – Apply to base cost used.

Add 3% for each foot of average story height over 12' base height. Deduct 3% for each foot of average story height under 12' base. For multistory buildings, add 2% for each story over two, to apply against the total floor area up to 30 stories; over 30, add 1% for each additional story.

For partially framed structures, see Section UIP 1.

FLOOR STRUCTURE – Apply to area of described floor or mezzanine.

Asphalt, on ground, including base	3.33	4.34	5.66	7.41
Concrete: on ground exclusive of Vapor barrier)	5.29	6.33	7.60	9.09
Lift slab	15.80	17.45	19.40	21.40
Elevated flat slab and joists	17.80	19.80	22.00	24.50
Pan or waffle slab and joists	16.30	18.00	20.05	22.20
Precast joists and deck	15.55	17.20	19.10	21.10
Precast joists, wood sheathing	12.10	13.40	14.75	16.35
Cored plank on bearing walls	13.50	14.90	16.65	18.45
Steel joists: flat slab	19.30	21.85	24.80	28.25
Corrugated deck and concrete	15.55	18.30	21.60	25.50
Cellular deck and concrete	17.95	21.40	25.50	30.25
Open metal grating	27.25	36.75	50.00	67.50
Precast deck	16.80	18.80	21.05	23.55
Wood sheathing	9.30	11.65	14.55	18.25
Light-gauge truss joists	8.16	10.30	13.00	16.45
Wood joists and sheathing	7.90	9.97	12.60	15.85
Wood joists and bridging only	5.94	7.76	10.10	13.20

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	0.97	1.38	1.94	2.76
Super flat (level) slab on grade, add	0.88	1.47	2.33	3.61
Each inch of sheathing over 1" (mill type) add	1.80	2.00	2.25	2.52
Foamed concrete surfacing 1 1/2" - 2"	1.41	1.74	2.15	2.65
Floor insulation, add	1.06	1.30	1.56	1.87
Cold storage	2.18	2.70	3.34	4.14
for each inch over 2", add	0.46	0.65	0.91	1.31

FLOOR COVER – Apply to area of described floor.

	1	2	3	4
Access (computer) floor, on stanchions	26.50	31.75	37.50	44.50
Full retail floors	17.75	20.75	24.25	28.25
Asphalt tile	3.05	3.57	4.17	4.89
Bamboo, laminated plank	14.65	17.70	21.30	25.75
Block, wood, treated	9.15	11.00	13.20	15.85
Brick, common, in mortar	12.05	14.40	17.25	20.70
Brick pavers, in concrete	14.25	17.10	20.55	24.60
Carpet and pad	3.45	5.60	8.80	13.55
Custom carpet and pad	12.30	20.70	33.25	52.50
Indoor/outdoor	2.95	3.87	5.08	6.67
Color, concrete	1.44	1.81	2.28	2.86
Cork	8.01	9.31	10.85	12.65
Diato, magnesite, etc.	10.45	12.20	14.15	16.50
Flagstone, random local stone, in concrete	19.00	22.70	27.25	32.50
Hardener and sealer, concrete	1.09	1.52	2.09	2.86
Heavy duty	2.61	3.15	3.79	4.55
Aggregate topping, 1/2" - 1"	7.07	9.27	12.15	16.00
*Hardwood	11.60	15.20	19.95	26.25
Sports-gym floors on resilient sleepers	13.55	16.65	20.35	24.90
Leather	52.50	61.00	72.00	84.50
Linoleum	4.98	6.06	7.37	8.94
Marble or granite	35.00	49.00	68.50	96.00
cast tile	21.95	25.75	30.00	35.00
Melamine/laminated tile	4.21	5.85	8.13	11.30
deluxe	10.55	12.35	14.50	17.00
Plastic tile, interlocking	10.20	11.30	12.55	13.90
Rubber fabric tile	13.55	16.00	18.65	21.95
Rubber tile or sheet	5.58	7.79	10.90	15.30
Seamless plastic, epoxy, urethane, neoprene, 1/32" - 1/16" thincoat	5.48	6.82	8.50	10.60
1/8" - 3/8"	8.68	10.90	13.75	17.30
Add for colored chips or glitter	2.20	2.77	3.52	4.46
Slate, grouted	21.95	25.75	30.50	35.75
Softwood	8.99	10.85	13.05	15.65
Stone plank	20.20	24.80	30.50	38.00
Synthetic sports surfacing	10.60	13.25	16.60	20.70
Terrazzo (exclusive of base slab)	15.40	19.15	23.80	29.50
tile	28.25	32.50	37.25	42.75
Tile, ceramic or quarry	14.80	19.00	24.40	31.25
Custom tile	35.00	42.25	51.00	61.50
*Wood over concrete, hardwood	13.30	17.20	22.30	29.00
Parquet block, prefinished	13.00	18.10	25.50	35.75
Softwood	10.40	12.40	14.70	17.55
Vinyl composition tile or sheet	2.78	3.62	4.74	6.16
Vinyl sheet	4.46	6.34	8.94	12.65
Vinyl tile	4.73	7.10	10.65	16.00
*Add for custom wood floors	8.82	18.20	32.25	53.50
For pictorial artwork, add	13.90	19.75	28.00	39.75

Add 15% for conductive floor coverings.

RETAIL MALLS – For pedestrian concourse, see Calculator section.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

CEILING – Apply to area of described ceiling.

	1	2	3	4
Acoustical ceilings, tile or panels:				
metal panels, including pads and suspension system	10.10	12.60	15.75	19.75
mineral fiber, fiberglass, panels only	2.24	3.20	4.55	6.51
Organic fiber, wood or cane, panels only	2.78	3.29	3.87	4.55
Embossed metal	7.94	10.90	15.05	20.70
Fiber sports court panel with suspension system	7.84	9.69	12.00	14.80
Gypsum board, taped and painted	2.95	3.30	3.68	4.14
Spray-on texture	2.83	3.09	3.37	3.68
Mirror-faced panels	28.25	31.50	34.75	38.75
Paint or stain, bottom of roof or floor	0.88	1.18	1.59	2.14
Plaster on lath: acoustical	5.95	6.72	7.57	8.52
Spray-on, thincoat with texture on lath or drywall	4.24	4.73	5.24	5.83
Standard, add 20% for Keene's	5.14	5.83	6.63	7.53
Add for metal lath	0.74	0.84	0.97	1.12
Plaster on masonry soffit: acoustical	5.10	5.73	6.45	7.26
Spray-on, thincoat with texture	3.42	3.77	4.14	4.55
Standard, add 23% for Keene's	4.30	4.88	5.52	6.23
Plaster panels, decorative	18.50	20.55	22.75	25.25
Plastic panels, with suspension system, but excluding lighting	9.34	11.30	13.65	16.50
Plywood (softwood) or hardboard panels	4.36	5.10	5.96	6.98
Hardwood	6.48	7.86	9.49	11.50
Coffered or vaulted panel with molding	13.85	18.85	25.75	35.25
Custom wood, site-built	34.50	40.75	48.50	57.00
Polylaminated panels (FRP)	4.46	4.99	5.58	6.23
insulated panel	6.82	7.69	8.66	9.78
Wood, boards or T&G, softwood	4.20	4.98	5.89	6.98
Hardwood	6.98	8.24	9.74	11.50
Carved, decorative	12.45	18.20	26.75	39.50

CEILING EXTRAS – Add to ceiling costs. For special ornamentation, see Section UIP 2.

Ceramic tile, add	18.85	24.30	31.25	40.50
Custom tile, decorative	39.50	47.50	58.00	70.50
Custom papers, stenciling, staff, Add	18.05	24.90	34.25	47.25
Border or coving only	4.46	5.83	7.62	9.94
Extensive decor, leather, cust. plaster, Terra cotta, add	52.50	66.50	85.50	109.00
Wood furring	1.35	1.66	2.05	2.52
Metal furring	2.11	2.65	3.34	4.21
If ceiling structure is required which is not part of the roof or floor structure, add	2.18	2.73	3.43	4.30
Suspended ceiling, metal suspension sys. Add	2.06	2.58	3.20	3.98
Fiberglass, FRP	3.15	3.77	4.49	5.38
Hardwood, decorative	4.96	7.01	9.88	13.95
Seismic supports, add	0.31	0.43	0.56	0.75
Ceiling insulation, add	1.02	1.28	1.61	2.02
Vinyl faced, exposed	1.41	1.64	1.87	2.18
Add for underdeck supporting bands	0.47	0.56	0.65	0.77
Rigid board, faced	2.03	2.67	3.49	4.57
Cold storage	3.01	4.02	5.39	7.23
For each inch over 2", add	0.46	0.65	0.93	1.34

For specific cold-storage insulation, see Section UIP 7.

STAGES AND PERMANENT STAGE FIXTURES – Apply to stage area.

Live performance	47.25	61.00	79.00	102.00
Speakers' (performance) platform	24.45	31.00	39.50	50.00

INTERIOR CONSTRUCTION – Table I is based on averages for several types of occupancies, not including furniture, fixtures, and equipment. Table II gives costs based on a square foot of partition area and may be used when a more detailed analysis is desired. For additional interior costs, see Sections UIP 2, 5 and 6. Fixtures and equipment, see Section UIP 12.

TABLE I. Apply to total floor area.
Add or deduct 5% for each foot of variation from 12' average story height.

FRAME INTERIOR PARTITIONS

	1	2	3	4
Banquet Halls	15.45	22.55	33.00	48.25
Barbershops	10.35	13.90	18.65	25.00
Bars	12.20	15.90	20.75	27.00
Cocktail lounges	13.30	17.95	24.40	33.00
Dairy sales	15.85	18.25	21.15	24.55
Department stores	16.15	18.95	22.15	26.00
Mall anchor stores	7.15	9.99	14.00	19.65
Discount stores	8.75	9.59	10.50	11.50
Warehouse discount	4.77	6.31	8.32	11.00
Mega warehouse discount	10.20	11.25	12.35	13.60
Warehouse food marts	2.42	3.23	4.29	5.73
Warehouse showrooms	6.47	7.72	9.21	11.00
Drugstores	26.00	30.50	36.00	42.75
Florist shops	18.65	20.40	22.30	24.45
Laundromats	10.75	12.95	15.55	18.65
Laundry/dry cleaners	11.35	13.70	16.60	20.05
Markets	16.45	17.75	19.25	20.75
Convenience stores	21.45	23.20	24.95	27.00
Mini–marts	59.50	62.50	66.00	69.00
Roadside stands	1.94	5.14	9.90	17.00
Supermarkets	16.20	17.55	18.95	20.50
Restaurants, small fast food	32.00	52.50	82.50	128.00
Snack bars	12.40	28.25	52.50	87.50
Table service	31.00	41.25	55.00	73.50
Cafeterias	16.00	23.15	33.50	48.25
Truck stops	40.25	42.75	45.75	48.50
Dinning atriums/playrooms	20.70	26.25	33.25	42.25
Retail stores	10.65	12.50	14.70	17.25
Luxury boutiques	41.00	60.50	89.00	132.00
Shopping center stores,				
Neighborhood	12.20	13.65	15.30	17.10
Community	12.40	14.00	15.85	17.90
Regional	13.85	16.00	18.50	21.35
Discount	9.47	10.70	12.05	13.55
Winery shops	17.40	29.25	46.75	73.50

MASONRY INTERIOR PARTITIONS

Banquet Halls	17.00	24.45	35.25	50.50
Barbershops	11.60	15.40	20.25	26.75
Bars	13.60	17.45	22.40	28.75
Cocktail lounges	14.80	19.65	26.25	34.75
Dairy sales	17.45	20.05	23.00	26.25
Department stores	17.75	20.65	24.00	27.75
Mall anchor stores	8.27	11.30	15.55	21.20
Discount stores	9.90	10.75	11.70	12.70
Warehouse discount	5.83	7.47	9.52	12.20
Mega warehouse discount	11.50	12.55	13.70	15.05
Food marts	3.05	3.98	5.20	6.81
Showrooms	7.48	8.81	10.35	12.20
Drugstores	28.00	32.75	38.75	45.00
Florist shops	20.35	22.10	24.10	26.25
Laundromats	12.05	14.20	16.80	19.80
Laundry/dry cleaners	12.70	15.15	18.05	21.50
Markets	18.10	19.60	21.15	22.85
Convenience stores	23.15	24.90	26.75	29.00
Mini–marts	62.00	65.00	68.00	71.50
Roadside stands	2.48	5.88	10.95	18.55
Supermarkets	17.90	19.35	20.90	22.60

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

MASONRY INTERIOR PARTITIONS (Continued)

	1	2	3	4
Restaurants, small fast food	34.00	55.00	85.50	132.00
Snack bars	13.85	30.25	55.00	91.50
Table service	33.25	43.75	58.00	76.50
Cafeterias	17.60	25.00	35.75	51.00
Truck stops	42.25	45.00	48.00	51.00
Dinning atriums/playrooms	22.30	28.25	35.50	45.00
Retail stores	11.95	13.90	16.15	18.80
Luxury boutiques	43.00	63.50	93.00	136.00
Shopping center stores,				
Neighborhood	13.60	15.15	16.80	18.65
Community	13.80	15.45	17.30	19.45
Regional	15.30	17.55	20.20	23.15
Discount	10.65	11.95	13.40	15.10
Winery shops	19.10	31.25	49.25	76.50

TABLE II. – ALTERNATE METHOD – Apply to square feet of partition area. Costs include doors and openings only. See discussion on Page 1. Do not use these costs if Table I is used. Section UIP 2 has a more detailed list.

	1	2	3	4
Acoustic accordion partitions	58.00	81.00	114.00	161.00
Clear glass, full height, framed	41.25	57.50	79.50	110.00
Masonry, tile or concrete block	12.70	18.65	27.50	40.50
Metal partitions	24.90	32.00	41.25	53.50
Metal and glass	25.75	33.50	43.50	57.00
Plaster, two sides	9.02	12.40	17.00	23.45
Steel studs, drywall, two sides	13.05	17.70	24.00	32.50
Plaster, two sides	7.94	11.10	15.55	21.75
Wood frame, drywall, two sides	11.80	16.30	22.30	30.75
For polylaminated panels (FRP),				
Add	3.05	5.10	8.15	12.70
For wood paneling, add	2.28	5.22	9.62	16.20

PLUMBING – Apply to total floor area or use Section UIP 3 for more detailed cost per fixture. The following costs represent typical ranges only.

Banquet Halls	10.90	14.90	20.35	27.75
Barbershops	6.19	8.43	11.50	15.70
Bars	11.45	15.45	20.75	28.00
Cocktail lounges	12.40	16.65	22.30	30.00
Dairy sales	9.13	11.10	13.45	16.35
Department stores	2.17	3.76	6.10	9.64
Mall anchor stores	1.71	3.02	4.96	7.88
Discount stores	2.06	3.01	4.35	6.31
Warehouse discount stores and showrooms	1.24	1.50	1.78	2.15
Mega warehouse discount	1.13	1.38	1.66	2.00
Food marts	2.62	4.04	6.11	9.24
Drugstores	4.07	5.45	7.28	9.72
Florist shops	7.47	9.22	11.40	14.15
Laundromats	14.00	16.50	19.50	23.05
Laundry/dry cleaners	10.20	13.25	17.25	22.30
Markets	4.35	6.06	8.44	11.75
Convenience stores	5.95	7.45	9.33	11.70
Mini–marts	14.45	18.10	22.85	28.75
Roadside stands	0.27	1.55	3.45	6.31
Supermarkets	4.57	6.16	8.29	11.15
Restaurants, lower qualities	9.94	12.35	15.40	19.15
Higher quality and small fast food	13.90	19.35	27.00	37.50
Cafeterias	10.35	15.25	22.40	32.75
Snack bars	7.17	16.60	30.50	51.00
Truck stops	14.00	20.50	30.00	43.75
Dining atriums/playrooms	5.36	6.76	8.49	10.70
Retail stores	2.65	5.02	8.56	13.85
Luxury boutiques	11.50	14.40	17.95	22.45
Shopping center stores,				
Neighborhood	5.07	6.62	8.60	11.25
Community	5.51	7.28	9.59	12.65
Regional	5.95	7.56	9.58	12.15
Discount	2.39	3.85	6.00	9.21
Winery shops	9.50	11.50	13.90	16.80

SPRINKLERS – Apply to sprinklered area. Costs include all piping and connections to main for light-hazard occupancies, but do not inlude tanks. For double sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost.

	1	2	3	4
1,000 square feet	5.61	7.26	9.38	12.15
2,000	5.07	6.48	8.28	10.60
3,000	4.76	6.06	7.72	9.83
5,000	4.39	5.58	7.07	8.97
10,000	3.95	4.96	6.23	7.84
15,000	3.70	4.64	5.80	7.26
20,000	3.55	4.43	5.54	6.90
30,000	3.34	4.15	5.14	6.39
50,000	3.11	3.83	4.70	5.78
75,000	2.89	3.55	4.36	5.35
100,000	2.76	3.39	4.15	5.10
150,000	2.59	3.18	3.89	4.76
200,000	2.50	3.05	3.68	4.46
300,000	2.34	2.83	3.42	4.14
400,000	2.25	2.70	3.24	3.89
600,000	2.11	2.52	3.03	3.62
800,000	2.03	2.43	2.89	3.45
1,000,000	1.96	2.34	2.77	3.30

HEATING, COOLING AND VENTILATION – Apply to total floor area. Add or deduct 3% for each foot of variation in average story height from 12' base.

Costs are given for gas fired heating systems. Add or deduct as follows for other fuels.

Oil fired +7% Coal, stoker +7% Coal, hand fired -2%

Heating Only

Electric, cable or baseboard	3.92	4.91	6.13	7.68
Radiant panels	3.59	4.18	4.88	5.67
Electric wall heaters	1.92	2.25	2.65	3.12
Forced air	4.07	5.17	6.59	8.37
Hot water, baseboard or convectors	7.03	9.12	11.85	15.45
radiant floor	6.41	8.83	12.15	16.80
Radiant heat, gas, suspended	1.99	2.68	3.61	4.88
Space heaters, gas, with fan	1.52	2.11	2.93	4.07
Steam coil, with boiler	2.95	3.77	4.82	6.16
Steam coil, without boiler	1.99	2.68	3.61	4.88
Steam radiator, with boiler	6.41	8.00	9.97	12.45
Without boiler	5.11	6.54	8.35	10.70
Wall or floor furnace	2.06	2.48	2.95	3.51

Heating and Cooling

Zoned A.C., hot and chilled water	17.45	21.75	27.25	33.75
Warm and cooled air	9.97	13.05	17.10	22.30
Package heating and cooling, short ducts	7.03	9.43	12.65	17.00
Heat pump system	7.68	10.45	14.25	19.50
Add for ground–loop heat source	1.99	2.95	4.33	6.41
Individual thru wall heat pump	3.36	4.79	6.79	9.65

Cooling Only

Evaporative coolers	3.59	4.23	4.98	5.85
Refrigerated air conditioning only, zoned system	7.28	9.06	11.35	14.15
Package unit, short ducts	4.96	6.14	7.62	9.41
Ventilation only, with ducts and blowers	1.30	1.59	1.94	2.39

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

ELECTRICAL AND LIGHTING – Apply to total floor area. Restaurants are listed by occupancy but are not included in the general tables.

	1	2	3	4
Few Outlets:				
Nonmetallic	5.83	7.22	8.91	11.00
Armored cable (BX)	6.91	8.55	10.60	13.15
Flexible conduit	8.24	10.20	12.65	15.75
Rigid conduit	9.86	12.25	15.25	18.85
Average Number of Outlets:				
Nonmetallic	8.44	10.45	12.95	16.00
Armored cable (BX)	10.05	12.50	15.45	19.25
Flexible conduit	12.05	14.95	18.50	23.00
Rigid conduit	14.40	17.85	22.10	27.50
Many Outlets:				
Nonmetallic	12.20	15.15	18.85	23.35
Armored cable (BX)	14.60	18.10	22.55	28.00
Flexible conduit	17.55	21.80	27.00	33.50
Rigid conduit	21.05	26.00	32.50	40.25

For undercarpet cable systems, deduct 10% from base costs for that floor only.

Unfinished Areas:				
Nonmetallic	2.36	2.87	3.51	4.29
Armored cable (BX)	2.83	3.45	4.20	5.10
Flexible conduit	3.49	4.20	5.05	6.08
Rigid conduit	4.18	5.02	6.03	7.25

Typical costs for some occupancies.

Banquet Halls	14.80	19.30	25.00	32.50
Barbershops	6.88	9.47	13.10	18.05
Bars	13.15	17.70	23.70	31.75
Cocktail lounges	18.80	24.00	30.75	39.50
Dairy sales	10.70	13.75	17.70	22.70
Department stores	14.95	20.25	27.50	37.25
Mall anchor stores	8.78	12.70	18.35	26.50
Discount stores	6.04	8.21	11.15	15.25
Warehouse discount stores	2.84	4.10	5.88	8.44
Mega warehouse discount	1.94	2.77	3.96	5.64
Foodmarts	7.13	9.71	13.25	18.05
Showrooms	4.15	5.83	8.18	11.50
Drugstores	13.30	17.70	23.50	31.25
Florist shops	10.05	13.50	18.10	24.30
Laundromats	12.40	14.55	17.10	20.10
Laundry/dry cleaners	10.10	12.30	14.90	18.05
Markets	10.35	13.35	17.25	22.15
Convenience stores	11.80	15.90	21.35	28.75
Mini–marts	29.50	34.00	38.75	44.25
Roadside stands	1.80	5.70	11.50	20.25
Supermarkets	10.85	13.55	16.85	21.05
Restaurants, lower qualities	15.05	18.95	23.85	30.00
Higher quality and small fast food	26.75	32.50	39.50	47.50
Cafeterias	15.30	19.80	25.50	33.00
Snack bars	10.90	15.30	21.45	30.00
Truck stops	16.95	22.40	29.75	39.50
Dining atriums/playrooms	6.94	10.20	14.95	21.95
Retail stores, Classes A and B	8.37	12.65	19.00	28.50
Classes C, D and S	6.63	10.80	17.00	26.25
Luxury boutiques	19.10	26.50	37.25	52.50
Shopping center stores,				
Neighborhood	9.24	12.45	16.70	22.45
Community	9.64	13.30	18.40	25.50
Regional	11.50	16.05	22.40	31.25
Discount	6.76	9.53	13.50	19.10
Winery shops	13.20	23.15	38.00	60.00

***NOTE:** The additional cost to the right for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face, or synthetic masonry veneer, see Wall Ornamentation on Page 7.

EXTERIOR WALL – Apply to total wall area. Costs do not include storefronts.

	1	2	3	4
Concrete or Masonry Walls				
Adobe or hollow clay block, 6”	30.00	33.00	36.50	40.25
8”	32.25	35.75	39.25	44.00
12”	36.75	40.25	45.00	49.75
14”	40.25	45.00	49.75	55.00
Adobe block, grouted or cavity,				
22” - 24”	46.75	52.00	57.50	64.00
30” - 32”	50.50	56.00	62.00	68.50
Block, concrete, 6”	26.25	28.75	31.75	35.25
8”	28.00	31.00	34.25	37.50
12”	32.00	35.50	39.00	43.25
16”	36.00	39.75	44.00	48.75
For each additional 4” of block, add	4.08	4.48	4.91	5.40
Block, grouted or cavity, 10” - 12”	30.25	33.50	36.75	40.25
*Add for ornamented face block	1.92	2.90	4.37	6.57
Brick, block backup, 8”	34.00	37.50	41.00	45.75
12”	37.75	41.75	46.50	51.00
16”	41.75	46.50	51.00	56.00
Brick, common, 8”	37.75	41.75	46.00	51.00
12”	46.00	51.00	56.00	61.50
16”	53.50	59.00	65.50	73.00
For each additional 4” of brick, add	7.91	8.76	9.69	10.75
Brick, grouted or cavity,				
Reinforced, 9” - 10”	41.50	45.75	50.50	55.50
Block backup, 9” - 10”	37.50	41.00	45.75	50.00
Block backup, 12” - 14”	41.50	45.75	50.50	55.50
Brick, 6” SCR modular	28.75	32.00	35.50	39.25
8”	32.00	35.50	39.00	43.25
*Add for face brick	4.32	4.73	5.17	5.65
Concrete, reinforced, formed, 4”	29.50	32.50	36.00	39.75
6”	31.75	35.00	38.50	43.00
8”	34.00	37.50	41.50	45.75
12”	38.50	42.25	46.75	51.50
For each additional 4” of concrete, add	4.48	4.89	5.33	5.82
Precast panels, 2”	24.15	26.75	29.75	33.00
4”	26.00	28.50	31.75	35.00
6”	28.50	31.25	34.75	38.25
8”	31.50	34.75	38.25	41.75
12”	36.75	40.25	44.25	48.75
Tilt–up panels, 4”	24.45	27.25	30.25	33.75
6”	26.25	29.25	32.50	36.50
8”	28.25	31.50	35.25	39.00
10”	30.50	34.00	37.75	42.25
12"	32.75	36.75	40.75	45.75
Add for insulated sandwich	2.16	2.74	3.47	4.40
Add for brick or tile inserts	8.24	10.20	12.70	15.70
Glass block, white or aqua	67.50	71.50	75.50	80.00
Colors or reflective	90.00	94.50	98.50	104.00
Local stone, block backup,				
Ashlar veneer, 12”	60.00	67.00	75.50	84.50
Rubble or rustic, veneer, 12”	48.00	54.50	62.50	70.50
For each 4” variation in thickness	4.08	4.48	4.91	5.40
Local fieldstone, in mortar, 12”	39.75	46.50	54.00	63.00
For each 4” variation in thickness	3.65	4.27	4.97	5.82
Local stone, rough cut, solid, 12”	66.50	80.00	98.00	118.00
Granite	69.00	87.00	110.00	138.00
Limestone	74.00	90.00	109.00	132.00
For each 6” variation in thickness	30.00	35.50	41.75	49.75

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Concrete or Masonry Walls	1	2	3	4
Rammed earth, soil cement, 24”	32.00	36.75	43.00	49.25
pneumatic build–up, formed one side	51.00	57.50	65.00	73.00
For each 6” variation in thickness	1.84	2.16	2.55	2.98
Tile, structural clay, 6”	28.00	31.00	34.50	38.25
10”	32.75	36.50	40.25	45.00

Concrete or Masonry Wall Extras	1	2	3	4
Add for stay in place forming	1.57	2.09	2.77	3.66
Add for glazed block or tile, each side	8.91	9.94	11.10	12.40
Add for pilasters	1.66	2.03	2.48	3.01
Add for bond beams	1.80	2.15	2.59	3.11
Add for seismic reinforcement	0.72	1.17	1.84	2.84
Add for synthetic plaster on Rigid insulation (EIFS)	6.90	8.55	10.60	13.05
Deluxe, textured or aggregate	11.30	13.60	16.35	19.60
Add for thin masonry, on rigid insulation	17.50	19.65	22.10	24.70
Add for clay tile backup in lieu of block	2.98	3.52	4.15	4.90
Add for earth sheltered waterproofing	1.31	2.02	3.07	4.63
Add for insulation	1.11	1.56	2.21	3.14
earth sheltered structures	1.84	2.67	3.85	5.55

For special stonework, see Section UIP 6.

Curtain Walls				
Brick or tile panels	35.00	42.00	49.75	60.00
Concrete and glass panels, precast	43.50	50.00	58.00	66.50
Glass fiber reinforced, molded	36.25	44.50	55.00	67.50
Metal and glass panels (ordinary)	46.75	55.50	66.00	79.00
Stainless steel or bronze and glass	69.50	81.00	93.00	108.00
Stone panels, local stone	64.00	70.50	78.00	86.00
Granite	69.00	79.00	89.00	100.00
Limestone or slate	65.50	72.00	80.50	88.50
Marble	66.50	76.00	85.50	96.50
Composite or aggregate panels	43.50	54.00	66.50	82.50
Structural glazed atrium including supports	105.00	141.00	187.00	252.00
Steel studs and stucco	25.25	29.75	34.75	41.00
Synthetic plaster on rigid insulation (EIFS)	28.75	34.50	41.25	49.25
Deluxe, textured or aggregate	33.25	39.75	47.50	57.00
Wood or aggregate board siding	24.40	30.00	37.00	45.25
Add for insulation, insulated area only	1.44	2.12	3.11	4.57

Pre-engineered Walls				
Sandwich panels, steel or alum., both sides	27.50	32.00	37.25	43.00
Cold storage, metal both sides	34.00	38.25	42.75	48.25
Cement fiber or shotcrete, two sides	20.35	24.60	29.75	36.25
Fiberglass panels, two sides	27.00	32.00	38.00	45.00
Glass exterior, metal interior	31.00	36.00	41.50	48.25
Add for stainless steel or textured (Galbestos)	4.46	5.35	6.41	7.68
Add for polylaminated (FRP) interior	1.18	1.47	1.83	2.28
Deduct for gypsum or hardboard interior	1.94	2.15	2.37	2.61
Prefabricated building panels, aluminum or steel and glass panels	39.50	43.00	47.50	52.50
Add for porcelain enamel finish	3.96	4.70	5.55	6.57
Add for block backup	8.01	9.02	10.15	11.45
Stucco on steel panel	42.75	47.50	53.50	59.50
Veneer, block or brick, on Steel panel	49.75	56.00	63.00	70.50
Stone, rubble or rustic	63.00	69.00	76.00	82.50

EXTERIOR WALL (Continued)

Single-wall Construction	1	2	3	4
Aluminum or steel, on steel frame	10.70	12.95	15.70	19.00
On wood frame	9.43	11.50	14.00	17.05
Add for porcelain enamel finish	3.93	4.67	5.55	6.60
Add for stainless steel or textured Galbestos	4.45	5.33	6.39	7.65
Asphalt siding, on wood frame	8.25	9.52	11.00	12.70
Cement fiber (Transite), On steel frame	11.25	13.35	15.90	18.95
Sheet siding on wood frame	10.20	12.20	14.55	17.40
Siding or shingles on wood frame	10.95	13.00	15.40	18.20
Fiberglass light panels, on Steel frame	8.57	9.77	11.10	12.65
Sandwich panels	10.35	11.35	12.50	13.75
Heavy, (FRP), over 8 oz	12.90	15.15	17.85	20.90
Light panels on wood frame	7.60	8.62	9.81	11.15
Sandwich panels	9.34	10.20	11.20	12.25
Heavy, (FRP), over 8 oz	11.90	14.00	16.50	19.45
Glass panels	32.00	40.50	50.50	63.50
Projected greenhouse	68.00	76.50	85.50	95.00
Log, up to 10” diameter	26.50	34.50	44.50	58.00
Deluxe, hand hewn or oversized	39.50	48.25	59.50	73.50
Plywood, boards or siding, on steel frame	10.85	12.95	15.45	18.50
On wood frame	9.59	11.50	13.80	16.55
Stucco, on baled straw	21.75	26.25	31.75	38.25
Stucco, on wood frame	11.05	12.80	14.90	17.30
Synthetic plaster on rigid insul. (EIFS), on steel frame	15.70	18.40	21.65	25.50
Wood shingles on wood frame	11.30	13.20	15.35	17.90
Add for exterior sheathing, per layer	1.66	1.90	2.18	2.48
Add for interior sheathing or liner, finished	2.86	3.40	4.04	4.80
Polylaminated panel (FRP)	3.80	4.54	5.44	6.50
Add for stud wall backing	1.03	1.27	1.53	1.86
Add for insulation	1.02	1.22	1.49	1.80
Vinyl faced, exposed	1.37	1.52	1.68	1.86
Rigid board, faced	1.74	2.28	2.98	3.89
Add for air infiltration wrap	0.27	0.34	0.47	0.60

Wood or Steel Stud Walls				
Aluminum or steel siding, horizontal	21.80	25.75	30.25	35.25
sheet panels	19.65	23.35	27.50	32.75
Asphalt siding	19.10	22.25	26.00	30.50
Cement fiber siding or shingles, horizontal	21.20	24.95	29.50	34.75
Sheet, embossed	20.05	23.35	27.25	31.50
Hardboard siding or shingles, horizontal	20.85	24.25	28.25	32.75
Sheet, embossed	19.90	23.15	26.75	31.00
Plywood, textured	19.00	22.15	25.75	30.00
Deluxe, redwood, cedar, etc	21.30	24.80	29.00	33.75
Shingles or shakes, wood	21.50	25.25	29.75	35.00
Stucco	21.60	25.50	30.00	35.25
Synthetic plaster on rigid insulation (EIFS)	25.25	30.00	35.25	41.50
Deluxe, textured or aggregate	30.00	35.25	41.50	49.00
Vinyl siding	21.60	25.50	30.00	35.25
Wood siding	20.65	24.00	28.00	32.50
Deluxe, redwood, cedar, etc.	22.45	26.50	31.25	37.00
Log, veneer siding	24.00	29.75	37.25	46.00
Deluxe, half–round, full corners	37.25	42.00	47.25	54.00
Veneer, face block or concrete brick	27.00	31.50	36.75	42.75
Common brick	27.50	32.00	37.50	43.75
Face brick	31.50	36.50	42.75	49.25
Mortarless brick	32.00	36.75	42.25	48.50
Stone, ashlar veneer	48.25	56.50	66.50	78.00
Rubble or rustic	38.75	45.25	53.50	62.50
Synthetic veneer or panel	27.25	33.50	41.25	50.50
Thin veneer on rigid insulation	33.25	39.00	45.00	52.50
Add for sheathing	1.37	1.66	2.03	2.50
Add for seismic/wind bracing	0.74	0.90	1.10	1.37

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Wood or Steel Stud Extras

	1	2	3	4
Add for insulation	1.00	1.19	1.46	1.74
Add for air infiltration wrap	0.29	0.38	0.52	0.68
Add for air space wrap	0.96	1.08	1.22	1.40
Add for double stud walls	2.15	2.58	3.09	3.70
Add for wood stresskin sandwich panels	6.24	7.34	8.63	10.15

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face, Roman or Norman	15.45	17.90	20.75	24.10
face, standard size	16.95	19.75	23.00	26.75
Mortarless brick	17.85	20.50	23.50	27.00
Select common	15.05	17.40	20.25	23.50
Used	16.45	19.00	21.95	25.50
Simulated veneer or panel, 1/4" - 3/8"	13.45	16.35	19.90	24.10
Thin veneer on rigid insulation	17.85	19.95	22.30	25.00
Add for pictorial carved artwork	218.00	248.00	284.00	323.00
Cement fiber siding	4.46	5.58	6.97	8.68
Concrete, ornamental cast stone	34.50	41.25	49.00	59.00
Concrete block, imitation flagstone	13.65	16.00	18.65	21.80
Solar screen	14.90	17.45	20.50	23.95
Ornamented face, slump, fluted, split or ground	14.70	17.00	19.75	22.75
Glazed one side, add	8.94	10.00	11.20	12.55
Cut stone, carved	145.00	212.00	306.00	443.00
Glass block, white or aqua	56.50	62.50	69.00	76.50
Colors or solar reflective	77.50	84.50	93.00	102.00
Granite, ashlar or panel	71.00	82.50	95.00	110.00
Limestone, ashlar or panel	52.50	61.50	72.00	85.50
Local stone, ashlar veneer or panel	45.25	53.50	62.50	73.50
Rubble or rustic	34.00	40.50	48.25	57.50
Imitation precast stone	15.40	20.05	26.00	34.00
Marble, panels	58.00	68.00	80.50	94.50
Metal panels, screens, louvers	24.90	32.50	42.75	55.50
Preformed wall panels	4.46	8.06	13.40	21.45
Add for curved panels	1.27	1.84	2.70	3.96
Ornamental doorways	88.50	172.00	299.00	488.00
Slate, panels	50.00	58.00	66.50	77.50
Stucco	5.58	6.28	7.04	7.94
On masonry	4.73	5.29	5.95	6.67
Add for synthetic on rigid insulation (EIFS)	3.55	4.51	5.72	7.26
*Built–up (EIFS) panel relief	7.34	9.44	12.20	15.75
Terra cotta	40.25	47.50	56.50	66.50
Tile, ceramic	19.45	22.40	25.75	29.75
*Mosaics	28.75	35.00	42.75	51.50
Hand painted tiles	155.00	215.00	299.00	415.00
Vinyl siding	4.82	5.70	6.76	8.01
Vitrolite (structural glass)	32.50	38.25	45.00	53.00
Wood, plywood	3.60	4.57	5.82	7.40
Shingles	5.20	6.18	7.36	8.73
Siding	4.70	5.82	7.21	8.89
Ornamented molding or trim	14.90	20.30	27.50	37.75
Add for treated wood	0.72	0.87	1.06	1.30
*Note - For pictorial artwork, add	16.45	22.55	31.00	42.75

STAINED GLASS – Apply to art glass for window, dome or skylight area. These costs vary greatly and the following typical cost ranges should be used with caution. See Section UIP 6 for complete description and detailed costs. For residential straight seams or simple bevel, deduct 50% from the Low Cost.

	1	2	3	4
Low cost, plain, min. work or detailed bevel etched\	100.00	136.00	187.00	255.00
Average, simple figures and scenes	315.00	420.00	570.00	765.00
High cost, highly detailed work (including domes)	690.00	950.00	1310.00	1810.00

STOREFRONTS – Apply to total storefront wall area including bulkheads. See Section UIP 6 for complete description and detailed costs. Costs include typical glazed areas, entrances, ornamentation, and bulkheads commensurate with the quality, excluding extremes. The deluxe front is highly ornamented, best stones, metals, revolving entries, etc. Costs do not include signs.

Exterior front, without displays	46.50	70.50	108.00	162.00
Deluxe (luxury boutique type)	172.00	218.00	277.00	345.00
Add for display areas	11.95	12.65	13.35	14.10
Interior mall fronts including closures	35.75	50.50	70.50	99.50

MISCELLANEOUS – Apply to total square feet of lined area if required.

Cold storage, insulation board	2.61	3.46	4.60	6.08
for each inch over 2", add	0.46	0.65	0.94	1.37

BASEMENT WALLS - Apply to basement wall area.

Concrete block, reinforced, 6"	15.45	17.55	19.95	22.60
8"	17.45	19.80	22.40	25.50
12"	21.45	24.25	27.25	30.75
For each additional 4" of block, add	4.14	4.54	4.99	5.48
Concrete, reinforced, 6"	18.55	21.05	23.95	27.25
8"	21.15	23.95	27.00	30.50
12"	25.75	29.00	32.50	36.50
16"	30.50	34.00	38.00	42.25
For each additional 4" of concrete, add	4.55	4.96	5.41	5.91
Masonry, brick, 8"	26.00	29.50	33.25	37.50
Stone, 12"	36.75	42.75	49.25	57.50
For each 4" variation in thickness	7.94	8.81	9.78	10.85
Wood, treated	14.30	17.65	21.80	27.00
Add for stay–in–place forming	0.93	1.38	2.05	3.05
Add for waterproofing	1.44	1.80	2.24	2.78
Earth sheltered structures	1.86	2.73	3.99	5.83
Add for insulation	1.10	1.58	2.22	3.15
Earth sheltered structures	1.61	2.46	3.73	5.66

For specific earth sheltered waterproofing, see UIP 1.

EXTERIOR, BASEMENT AND TOWER STAIRS - Per riser. For fire escapes, see UIP 5.

Concrete	255.00	352.00	495.00	690.00
Steel pans or prefab. Concrete on steel	284.00	390.00	525.00	715.00
Steel or aluminum grating	323.00	427.00	570.00	765.00
Wood	95.50	149.00	229.00	350.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

ROOF STRUCTURE – Apply to roof area.

	1	2	3	4
Concrete joists, slab	15.80	17.75	19.90	22.40
Lift slab	14.35	16.00	17.80	19.90
Pan or waffle slab and joists	14.55	16.30	18.25	20.40
Precast joists and deck	13.80	15.50	17.30	19.40
Precast joists, wood deck	11.05	12.30	13.70	15.20
Cored plank on bearing walls	12.30	13.70	15.35	17.10
Thin shell	22.90	27.25	32.50	38.50
Concrete dome, cast in place	52.50	57.50	62.50	68.50
Thin shell	34.25	38.25	43.00	48.00
Fabric roof, air supported	55.00	59.00	64.50	69.50
Tension supported	61.50	69.00	77.00	86.50
Add for thermal liner	5.32	6.47	7.88	9.57
Steel joists, concrete slab	18.60	21.20	24.10	27.50
Gypsum on formboard	9.61	11.85	14.70	18.15
Precast deck	16.35	18.45	20.85	23.50
Steel deck	10.05	12.70	16.10	20.15
Light–gauge truss joists	8.29	10.60	13.55	17.40
Steel deck, gypsum or concrete	13.10	16.15	19.75	24.35
Wood or composition deck	8.15	10.40	13.20	16.85
Light–gauge truss joists	6.97	8.99	11.55	14.90
Open steel system for corrugated metal	4.18	5.92	8.42	11.95
Light purlin supports only	1.91	2.47	3.23	4.20
Steel space frame and sheathing three dimensional	29.00	38.00	49.50	64.50
Architectural (exclusive of glazing)	46.25	70.50	108.00	162.00
Metal dome and cover	41.25	47.75	55.00	63.50
Glazed or translucent panels	94.50	114.00	140.00	171.00
Wood joists, wood or composition deck	6.37	8.36	11.00	14.40
Exposed rafters, 2” T&G Sheathing	9.43	11.90	15.00	18.85
Prefab. panels (exclusive of girders)	2.61	3.21	3.99	4.96
Stresskin sandwich panels exclusive of purlins	9.29	12.00	15.50	20.15
Add for snow roof, furred sheathing layer	2.75	3.03	3.34	3.69
Open wood system for Corrugated metal	2.44	4.07	6.52	10.15
Light purlin supports only for metal, wood, or fiberglass	1.06	1.42	1.89	2.49
Lamella	17.90	21.65	26.00	31.50
Wood dome and deck	27.75	34.00	42.00	51.50
Add seismic/hurricane truss ties	0.53	0.63	0.75	0.88
Add for monitor roof	60%	50%	40%	40%
Add for sawtooth roof	40%	35%	30%	25%
Add for complex roof turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER – Apply to roof area.

	1	2	3	4
Aluminum or steel, corrugated, Crimped or tile panels , pre-formed, light, to 26 gauge	2.95	3.54	4.27	5.14
Heavy, under 26 gauge	5.91	6.79	7.79	8.94
Formed seam, flat or standing	7.68	9.38	11.50	14.10
batten seam	8.94	10.85	13.25	16.15
Sandwich panels, pre–engineered	11.95	15.05	18.80	23.55
Cold storage	26.00	29.75	34.25	39.50
Shingles	5.83	6.98	8.37	10.05
Aggregate finish	7.59	9.10	10.95	13.15
Thatch	24.70	26.75	29.00	31.50
Add for interior liner, metal	2.61	3.01	3.45	3.96
plastic	2.36	2.74	3.18	3.70
Add for porcelain enamel finish	3.96	4.70	5.55	6.57
Add for stainless steel or textured Galbestos	4.46	5.35	6.41	7.68
Asphalt, corrugated	2.28	2.65	3.11	3.62
Atrium skylight, frame and glazing	46.75	62.00	83.00	110.00
Built–up composition	2.70	3.42	4.32	5.48
Cement fiber shingles	5.91	7.31	9.00	11.10
Corrugated or sheet (Transite)	5.58	7.72	10.70	14.80
Composition, roll, mineral surface	1.44	1.74	2.11	2.53
Composition shingles, light to 235#	2.36	2.70	3.11	3.55
Heavy over 235# or laminated	3.05	3.92	5.04	6.50
Copper, flat or standing seam	16.00	18.65	21.75	25.50
Batten seam	17.15	20.05	23.45	27.25
Shingles	15.75	17.10	18.40	20.05
Elastomeric or modified bitumen, single ply	4.46	5.92	7.84	10.35
Reinforced sheet or spray–fluid coat	8.01	9.33	10.90	12.70
Fiberglass, corrugated or sheet, light	2.78	3.29	3.87	4.55
Sandwich panels	4.73	5.39	6.17	7.07
Heavy, FRP, over 8 oz	5.48	6.92	8.78	11.10
Slate	11.10	13.20	15.70	18.55
Red	20.70	24.90	30.00	36.25
Composite, reinforced fiber	7.26	8.93	11.00	13.55
Terne, flat or standing seam	15.45	17.95	20.90	24.30
Batten seam	16.85	19.60	22.60	26.25
Tile, clay	10.05	12.75	16.20	20.65
Concrete	7.26	8.46	9.89	11.55
Plastic or rubber	6.42	7.43	8.59	9.94
Add for custom coloring or glazing	1.86	2.34	2.95	3.70
Wood, shakes	5.20	5.96	6.83	7.83
Shingles	4.70	5.48	6.37	7.40
Fiber shingles	3.12	3.77	4.54	5.48
Add for fire–resistant finish	0.74	0.90	1.09	1.34
Add for roof insulation	1.33	2.02	3.09	4.69
Earth sheltered structure	2.14	3.27	4.99	7.54
Add for earth sheltered waterproofing	1.87	2.77	4.10	6.04

NOTE: For underroof insulation and supporting structures, see Ceiling Extras on Page 3. For specific earth-sheltered waterproofing, see Section UIP 1. For earthen roof cover, see Fill costs on Page 1. For cold-storage insulation, see Ceiling Extras or Section UIP 7 for detailed costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

STORES AND COMMERCIAL BUILDINGS

SECTION SEG 3
(SEGREGATED COST METHOD)

ROOF MODIFIERS – Use the following multipliers for sloping roofs 6' : 12' or greater to convert the unit costs to cost per square foot of horizontal roofed area.

Rise	:	Run	Multiplier	Rise	:	Run	Multiplier
6'	:	12'	1.12	12'	:	12'	1.42
8'	:	12'	1.20	18'	:	12'	1.80

CUPOLA STRUCTURES, CLOCKS, ETC. – See Section UIP 4. For clock or bell towers, see in Section SEG 6, Page 8.

TRUSSES AND GIRDERS – Apply to area supported.

	1	2	3	4
Steel trusses or longspan girders	3.80	4.70	5.80	7.16
Timber trusses	4.08	5.04	6.22	7.68
Glued, laminated trusses or girders	3.77	4.61	5.63	6.88

EXTERIOR BALCONIES - Apply to balcony area.

Concrete	27.50	35.50	46.00	60.00
Steel	24.90	34.25	47.25	65.00
Wood	21.00	28.50	39.00	53.00
Add for ornate finishes, balustrades	22.75	28.50	35.75	44.50

CANOPIES OR MARQUEES – Apply to horizontal area. For light false-mansard structures, deduct 50%. For greater detail, see Section UIP 4 or 6.

Wood frame	33.50	42.00	52.50	65.00
Steel frame	43.00	55.00	70.00	89.50

DORMERS – See Section UIP 4, Roofs; solar rooms, see Section UIP 11.

ARCHITECTURAL COLUMNS – See Section UIP 6.

ELEVATORS AND ESCALATORS – Apply to total area served or use Section UIP 7 for detailed costs.

	1	2	3	4
Department stores,				
Classes A and B	-----	7.25	9.50	12.60
Mall anchors	4.17	5.47	7.06	-----
Class C	-----	5.26	7.06	9.41
Mall anchors	3.08	3.96	5.14	-----

MISCELLANEOUS BUILT-IN CONSTRUCTION – Apply to each item.

	1	2	3	4
Drive–up window, fast food	1,660	3,350	5,900	9,650
Pneumatic tube system,				
Per station	27,400	33,000	39,600	47,600
PVC systems	5,400	6,500	7,950	9,600
Sound system, base cost	1,220	1,490	1,800	2,180
Add per speaker, paging only	130	158	189	228
music and voice	308	337	376	420

Television security system, closed circuit, see UIP 3.

MISCELLANEOUS BUILT-IN CONSTRUCTION (Removal) - The following table is to be used to remove all built-in refrigerated storage boxes and ancillary cooling equipment that is classified as real estate and included in the interior construction tables found on Pages 3 and 4. Apply as a deduction to the total floor area.

Banquet Hall	3.17	4.39	6.11	8.49
Bars	4.30	6.13	8.71	12.40
Cocktail lounges	3.87	5.58	8.04	11.55
Dairy sales	12.75	15.05	17.60	20.75
Drugstores	2.50	3.45	4.71	6.48
Florist shops	11.30	12.45	13.75	15.25
Markets	7.85	8.57	9.38	10.25
Convenience stores	9.00	10.15	11.45	12.90
Mini-marts	17.40	18.95	20.65	22.40
Roadside stands	-----	-----	4.66	9.24
Supermarket	7.60	8.38	9.25	10.20
Restaurants, small fast food	6.23	9.15	13.45	19.80
Snack bars	6.19	9.66	14.90	22.60
Table service	4.15	6.57	10.20	15.60
Cafeterias	4.11	6.23	9.40	14.15
Truck stops	5.92	7.57	9.66	12.35
Modular Diner	17.75	22.30	28.25	35.25
Winery shops	13.00	15.10	17.45	20.35

NUMBER OF STORIES MULTIPLIER
To allow for the cost of hoisting materials, increased labor costs, and miscellaneous costs due to high-rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% for each story over three.

Example: Twenty three story building: Multiplier = 1.050

ATRIUM H.V.A.C.
To price the heating and cooling of large atrium areas, simply refine the appropriate square foot system cost to be applied to the ground floor area by 100% plus 3% for each foot over the 12-foot average story height adjustment found on Page 4.

Example: Multistory building, atrium height of 52': Multiplier = 2.20

COMPLETION OF BUILDING VALUATION
The contractors' overhead and profit, sales taxes, permit fees, and insurance during construction are included in the above costs. Interest on interim construction financing is also included, but not financing costs, real estate taxes or brokers' commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers which bring the basic costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIAL BUILDINGS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

Garages, industrial buildings, lofts, and warehouses are characterized by utilitarian construction; however, many light industrial buildings approach office buildings in interior construction and space di- vision. In this respect, electronic and similar industrial plants have loft or office building characteristics. If the plumbing and interiors of these buildings are not priced in detail, care should be exercised using the typical cost ranges shown. The interior and plumbing costs included in the tables of costs per square foot of floor area include typical office and showroom space necessary for the manufacturing or storage operation. They do not include office and showroom space for other functions of the entire business even though they may be attached to the structure. Many buildings of the types covered by this section are designed to support heavy loads. Their foundations, frames, floors, and walls are heavier than most other occupancies, while fenestration is simpler. Sheds, including low cost utilitarian storage structures, which are usually lighter than typical industrial or warehouse buildings, should be priced from Section UIP 11.

Cold-storage facilities can be priced by building up the basic structure cost from this section and adding costs for specific insulation and refrigeration from Section UIP 7. Foundations for Classes A and B industrial buildings can be priced quite accurately on a square foot of floor area basis. However, with Classes C, D and S light industrial shell type buildings, a perimeter foundation or footings may carry most or all of the load and the cost is generally proportional to the perimeter. Such costs may be better computed on the linear foot of bearing wall basis with costs of column footings added if there are interior columns supporting a roof or floor load above.

Frame costs should be adjusted for partial bearing walls, as described in Section UIP 1, using a cost proportional to the load which is carried by the frame. If the frame members are visible and uniform enough to be easily measured and counted, they may be priced from Section UIP 1. When a complete frame cost is used, generally the trusses or girders would be included as the horizontal members of the frame. See explanations in Section UIP 1 or SEG INTRO. In single-story buildings where the frame supports only a light roof, Rating 1 might often be chosen, even in average buildings. Interior construction varies widely in industrial structures. The costs given are only typical ranges and should be used with caution. If desirable, partition costs may also be built up from Section UIP 2; however, interior costs also include miscellaneous cabinets, shelves, stairs, and other items. Plumbing will vary widely and may be more accurately priced on a per fixture basis; however, typical cost ranges are given on a square foot basis. Industrial sinks and other specialized fixtures may also be found in Section UIP 3. Plumbing costs do not include process piping for industrial equipment.

Electrical costs do not include power wiring or panels for industrial equipment.

Exterior walls may contain few or no windows, or they may be nearly an all-glass area. Thus, the exterior wall costs have a wide variation, depending on the amount and quality of fenestration.

SEGREGATED COSTS

(For explanation of the rating numbers, see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation, bulk (per cu. ft.)	0.44	0.60	0.81	1.12
Fill (per cu. ft. of compacted earth)	0.46	0.59	0.77	1.00
Site preparation (per sq. ft. of site)	0.35	0.47	0.62	0.83

FOUNDATION – Table I gives complete average costs per square foot of floor area. If a more detailed estimate is desired for Class C, D or S buildings with continuous or column footing foundations, use Tables II and/or III as appropriate.

TABLE I. CONCRETE FOUNDATIONS – Apply to total floor area including basements, but excluding mezzanines.

Concrete foundations for:				
Class A	3.39	4.54	6.07	8.12
Class B	3.63	4.80	6.34	8.37
Class C, bearing wall	3.10	4.17	5.62	7.57
Nonbearing wall	2.95	3.99	5.39	7.28
Class D, masonry veneer	2.75	3.73	5.05	6.87
Siding or stucco	2.44	3.28	4.45	6.01
Pole frame construction	2.28	3.05	4.12	5.56
Class S	2.47	3.35	4.59	6.26
Classes C, D and S, light perimeter foundation for open shell type structures	1.02	1.35	1.82	2.43
Add for perimeter insulation,				
Ground floor area only	0.15	0.24	0.38	0.59
Earth sheltered structures	0.19	0.34	0.55	0.84
Add for seismic, base isolators	5.82	8.80	13.25	19.90
Damping devices	5.19	7.03	9.53	12.90

FOUNDATION (Continued) – ALTERNATE METHOD

TABLE II. CONCRETE FOUNDATIONS – Apply to linear feet of continuous footings or foundation walls if Table I is not used. See foundation discussion above.

	1	2	3	4
Heavy grade beam/stem footing				
Class C	40.75	57.50	81.50	115.00
Class D, masonry veneer	36.50	51.50	73.00	103.00
Siding or stucco	32.00	45.50	64.50	92.00
Class S	33.00	47.00	67.50	96.00
Classes C, D and S, reinforced				
Light grade beam	25.50	36.75	53.00	76.50
Unreinforced grade beam	12.80	18.85	27.75	41.00
Add for perimeter insulation	1.37	3.09	5.66	9.49
Earth sheltered structures	1.96	4.49	8.25	13.90
Add for perimeter radon control matting	4.27	5.05	5.98	7.06
Add for perim. raised floor skirting	12.35	14.50	17.10	20.05

TABLE III.CONCRETECOLUMN FOOTINGS – Apply to total number of columns if Table I is not used. Costs apply to one-story buildings. For others, add 20% for each story over one.

Concrete columns	78.50	141.00	231.00	372.00
Steel columns	72.50	132.00	218.00	353.00
Light pre–engineered frame	59.50	80.00	107.00	141.00
Light tubular/pipe frame.	45.00	64.00	91.00	129.00
Wood columns	65.50	108.00	170.00	266.00
Light pole frame	45.75	64.50	92.00	129.00

FOUNDATION ADJUSTMENTS – Apply to base cost used.

Add 2% for each foot of average story height over 14' base.
Deduct 2% for each foot of average story height under 14' base.
Deduct .8% for each story over one, for multistory buildings.
For one story buildings with light perimeter grade beam foundations or foundations and footings formed and poured monolithically with floor slabs, use 60% of the above costs for that floor only. Add for pilings from Section UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

FRAME – Apply to total floor area including basements, but excluding mezzanines.

	1	2	3	4
Bearing walls, wood or steel				
floor supports only	2.09	2.51	3.00	3.58
Masonry supports only	3.03	3.62	4.35	5.22
Steel, fireproofed, Class A	21.55	25.25	29.75	35.00
Composite concrete steel, Class B	19.10	22.05	25.50	29.50
Concrete, reinforced, Class B	18.50	21.70	25.25	29.50
Precast, post-tensioned	17.85	20.60	23.85	27.50
Steel, Classes C and D	7.56	9.76	12.60	16.25
Class S	7.22	9.32	12.05	15.55
Light pre–engineered frame	4.57	5.90	7.58	9.74
Light tubular/pipe frame	2.77	3.72	5.05	6.82
Add for fireproofing	1.30	2.08	3.26	5.00
Steel columns, wood beams	5.22	7.04	9.54	12.90
Wood, A–frame construction	5.89	7.41	9.31	11.70
Laminated bents and arches	6.72	8.39	10.50	13.15
Light arch–rib construction	4.24	5.39	6.87	8.73
Mill–type (heavy timber)				
construction	7.01	8.79	11.05	13.85
Heavy timber/log construction,				
architectural	13.75	18.00	23.75	31.25
Post and beam construction	4.82	6.07	7.66	9.62
Light pole type construction	2.74	3.60	4.77	6.32
Add for seismic/wind bracing,				
Class A and B	4.14	5.87	8.30	11.75
Open Class C, D and S frames	1.13	1.44	1.82	2.31
damping devices	1.72	2.25	2.96	3.89

FRAME ADJUSTMENTS – Apply to base cost used.

Add 4% for each foot of average story height over 14' base height. Subtract 4% for each foot of average story height under 14'. For multistory buildings, add 4% for each story over two, to apply against the total floor area. For craneways, use frame member costs in Section UIP 7. For partially framed structures, see Section UIP 1.

FLOOR STRUCTURE – Apply to area of described floor or mezzanine.

Asphalt, on ground, including base	3.10	4.27	5.87	8.06
Concrete: on ground (exclusive of				
vapor barrier)	4.99	6.31	7.98	10.05
Lift slab	14.90	17.35	20.25	23.65
Elevated flat slab and joists	16.85	19.75	23.05	27.00
Pan or waffle slab and joists	15.40	17.95	20.90	24.45
Precast joists and deck	14.65	17.10	19.90	23.20
Precast joists, wood sheathing	11.40	13.30	15.40	18.00
Cored plank on bearing walls	12.80	14.90	17.45	20.40
Steel joists: flat slab	18.10	21.70	25.75	31.00
Corrugated deck and concrete	14.50	18.00	22.50	28.00
Cellular deck and concrete	15.65	20.30	26.50	34.50
Open metal grating	26.25	37.50	53.00	75.00
Precast deck	15.80	18.75	22.10	26.25
Wood sheathing	8.84	11.55	15.15	19.90
Light gauge truss joists	7.70	10.20	13.60	18.00
Wood joists and sheathing	7.43	9.84	13.05	17.30
Wood joists and bridging only	5.56	7.69	10.55	14.50

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	1.00	1.43	2.03	2.87
Super flat (level) slab on grade, add	0.88	1.50	2.42	3.82
Each inch of slab on grade over 10",				
add	0.65	0.75	0.90	1.05
Each inch of sheathing over 1",				
(mill type) add	1.74	2.00	2.30	2.64
Foamed concrete surfacing, 1 1/2" - 2"	1.38	1.74	2.17	2.71
Floor insulation, add	1.05	1.28	1.59	1.96
Cold storage	2.14	2.71	3.45	4.38
For each inch over 2", add	0.46	0.65	0.93	1.33

FLOOR COVER – Apply to area of described floor.

	1	2	3	4
Access (computer) floor, on				
stanchions	26.00	31.00	36.75	43.75
Full office floors	17.15	20.20	23.80	28.00
Asphalt tile	3.06	3.58	4.17	4.86
Bamboo, laminated plank	14.30	17.00	20.25	24.15
Block, wood, treated	8.90	10.55	12.50	14.75
Brick, common, in mortar	11.85	13.90	16.35	19.15
Brick, industrial, acidproof	21.60	26.75	33.50	41.50
Brick pavers, in concrete	13.90	16.50	19.50	23.15
Carpet and pad	3.06	4.85	7.47	11.40
Custom carpet and pad	11.40	18.20	28.25	43.50
Indoor/outdoor	2.89	3.70	4.73	6.06
Color, concrete	1.37	1.74	2.20	2.77
Cork	7.93	9.08	10.40	11.90
Diato, magnesite, etc.	10.20	11.80	13.65	15.85
Flagstone, random local stone,				
in concrete	18.95	22.25	26.00	30.75
Gratings, plastic	15.05	24.55	38.75	59.50
Steel or aluminum	16.15	24.90	38.00	57.50
Stainless steel	68.00	95.00	135.00	189.00
Hardener and sealer, concrete	1.05	1.40	1.90	2.58
heavy duty	2.48	2.99	3.61	4.36
Aggregate topping, 1/2" - 1"	6.91	9.03	11.85	15.45
*Hardwood	10.85	13.95	17.90	23.15
Sports gym floors on resilient				
sleepers	12.85	15.75	19.30	23.55
Linoleum	5.02	5.94	7.04	8.34
Marble or granite	33.50	45.25	61.00	83.00
Cast tile	20.90	24.55	28.50	33.50
Melamine/laminated tile	4.01	5.41	7.28	9.78
Deluxe	10.30	12.05	14.10	16.50
Plastic tile, interlocking	10.05	11.10	12.30	13.65
Rubber fabric tile	13.40	15.45	17.90	20.75
Rubber tile or sheet	5.27	7.20	9.80	13.40
Seamless plastic, epoxy, urethane, neoprene,				
1/32'' - 1/16'' thincoat	5.20	6.38	7.85	9.62
1/8'' - 3/8''	8.43	10.40	12.85	15.90
Add for colored chips or glitter	2.14	2.71	3.43	4.36
Slate, grouted	20.90	24.60	29.00	34.00
Softwood	8.65	10.25	12.20	14.40
Stone plank	19.60	23.70	28.75	35.00
Synthetic sports surfacing	10.30	12.65	15.55	19.15
Terrazzo (exclusive of base slab)	14.55	17.85	21.95	27.00
tile	28.25	32.00	36.50	41.50
Tile, ceramic or quarry	14.30	17.90	22.45	28.25
Custom tile	33.75	40.25	48.00	57.00
*Wood over concrete, hardwood	12.45	15.85	20.30	26.00
parquet block, prefinished, in				
mastic	12.35	16.70	22.70	30.75
Softwood	10.10	11.85	13.90	16.35
Vinyl composition tile or sheet	2.81	3.51	4.38	5.47
Vinyl sheet	4.36	5.97	8.13	11.15
Vinyl tile	4.51	6.59	9.58	13.95
*Add for custom wood floors	8.32	17.55	31.50	52.50
For pictorial artwork, add	14.20	20.20	28.50	40.50

Add 15% for conductive floor coverings.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

CEILING – Apply to area of described ceiling

	1	2	3	4
Acoustical ceilings, tile or panels: metal panels, including pads and including pads and suspension system	9.10	11.80	15.30	19.90
Clean room panels, incl. suspension system	15.55	17.60	19.90	22.55
Mineral fiber, fiberglass, panels only	1.92	2.90	4.38	6.57
Organic fiber, wood or cane, panels only	2.71	3.24	3.86	4.61
Embossed metal	7.17	10.20	14.60	20.85
Fiber sports court panel with suspension system	7.50	9.40	11.80	14.80
Gypsum board, taped and painted	2.87	3.23	3.59	4.02
spray on texture	2.77	3.05	3.36	3.71
Mirror faced panels	26.75	30.00	33.50	37.50
Paint or stain, bottom of roof or floor	0.83	1.13	1.56	2.14
Plaster on lath: acoustical	5.73	6.57	7.53	8.60
Spray on, thincoat with texture on lath or drywall	4.14	4.66	5.23	5.86
Standard, add 20% for Keene's	4.96	5.72	6.59	7.57
Add for metal lath	0.71	0.83	0.97	1.12
Plaster on masonry soffit: acoustical	4.91	5.61	6.41	7.34
Spray on, thincoat with texture	3.31	3.71	4.13	4.61
Standard, add 23% for Keene's	4.13	4.74	5.48	6.31
Plaster panels, decorative	18.35	20.40	22.75	25.25
Plastic panels, with suspension system, but excluding lighting	8.75	10.85	13.45	16.70
Plywood (softwood) or hardboard panels	4.03	4.85	5.81	6.97
Hardwood	5.89	7.36	9.16	11.45
Coffered or vaulted panel with molding	12.95	18.05	25.25	35.25
Custom wood, site–built	34.50	40.50	48.00	56.50
Polylaminated panels (FRP)	4.36	4.91	5.52	6.22
Insulated panel	6.57	7.50	8.56	9.78
Wood, boards or T & G, softwood	4.03	4.85	5.81	6.97
Hardwood	6.38	7.76	9.41	11.45
Carved, decorative	11.45	17.05	25.50	38.25

CEILING EXTRAS – Add to ceiling costs. For special ornamentation see UIP 2.

Ceramic tile, add	17.15	22.85	30.50	40.50
Custom tile, decorative	38.00	46.50	57.50	71.00
Custom papers, stenciling, staff, add	16.65	23.55	33.25	47.25
Border or coving only	4.27	5.64	7.47	9.86
Extensive decorating, cust. plaster,				
Terra cotta, add	52.00	66.50	84.50	109.00
Wood furring	1.28	1.59	1.99	2.49
Metal furring	2.05	2.61	3.33	4.23
If ceiling structure is required which is not part of the roof or floor structure, add	2.06	2.64	3.37	4.32
Suspended ceiling, metal,				
suspension system add	1.80	2.34	3.06	4.01
Fiberglass, FRP	2.90	3.57	4.39	5.38
Hardwood, decorative	4.79	6.74	9.43	13.30
Seismic supports, add	0.40	0.50	0.62	0.78
Ceiling insulation, add	1.02	1.28	1.62	2.06
Vinyl faced, exposed	1.38	1.64	1.90	2.24
Add for underdeck supporting bands	0.47	0.56	0.65	0.77
Rigid board, faced	1.97	2.64	3.49	4.64
Cold storage	3.06	4.10	5.48	7.32
For each inch over 2", add	0.46	0.65	0.94	1.34
Vapor barrier, plastic	0.19	0.29	0.41	0.57

For specific cold storage insulation, see UIP 8.

INTERIOR CONSTRUCTION – Apply to total floor area.

Add or deduct 5% for each foot of variation from 14' average story height.

FRAME INTERIOR PARTITIONS

	1	2	3	4
Armories	23.05	27.00	31.75	37.50
Automotive centers	8.62	11.50	15.40	20.65
Auto dealerships, complete	4.91	6.92	9.80	13.85
Broadcasting facilities	48.25	59.00	72.00	87.50
Cold storage facilities	1.50	3.71	7.01	11.95
Computer centers	46.50	52.50	58.00	65.00
Creameries	9.25	13.65	20.20	29.75
Garages, minilube	30.50	43.75	63.00	90.50
Service, lower qualities	3.30	4.77	6.92	10.00
Higher qualities (incl. municipal service ctrs.)	5.26	15.75	31.50	55.00
Service shed	1.08	1.55	2.24	3.23
Storage	2.48	3.62	5.33	7.82
Underground parking	3.30	4.23	5.45	6.98
Hangars, storage	0.65	2.58	5.45	9.71
Maintenance and offices	5.22	7.57	11.00	16.00
Industrials, manufacturing, light	1.78	4.07	7.48	12.55
Heavy	27.50	33.75	41.25	51.00
Engineering and research	7.04	12.15	19.80	31.25
Laboratories	48.00	56.50	66.50	79.00
Lofts	4.17	8.06	13.85	22.55
Flex buildings	3.20	6.62	11.70	19.35
Miniwarehouses	4.91	6.64	8.99	12.15
High-rise facilities	5.73	7.75	10.45	14.15
Parking structures, parkades	1.49	2.89	4.99	8.12
Passenger terminals	18.95	31.25	49.25	77.50
Post offices, branch	48.25	58.00	69.50	83.00
Main	44.25	55.50	70.00	87.50
Processing facilities	7.94	12.15	18.50	28.00
Showrooms	8.94	12.20	16.70	22.75
T–hangars	1.80	2.37	3.14	4.14
Warehouses, storage	0.57	2.09	4.36	7.73
Distribution	3.30	5.32	8.35	12.90
Mega storage/distribution	0.25	2.33	5.41	10.00
Transit	6.13	8.41	11.60	16.00
Add for masonry partitions	15%	12%	10%	10%

MEZZANINES – Apply to open mezzanine area. (Cost of miscellaneous items such as rail, stairs, etc.)

Mezzanine	3.89	4.96	6.32	8.07

MISCELLANEOUS – Apply to total square feet of building area, if required. These costs vary greatly, and the following typical cost ranges should be used with caution. Built-in equipment which is normally included under the general contract is included in the interior construction costs.

Laboratories, fixed equipment	23.05	28.50	35.25	43.50

STORAGE VAULTS – Per square foot of vault area, excluding doors. Add or deduct 2% for each foot of height variation from the 14' standard. For more detailed costs see UIP

Record storage	108.00	119.00	132.00	145.00
Modular vault systems,				
insulated/record storage	69.00	84.50	106.00	130.00

CATWALKS – Apply to linear footage of walkway.

Catwalks, steel	147.00	174.00	205.00	234.00
Wood	125.00	145.00	169.00	192.00
Ladders, steel	23.05	30.75	41.00	54.50
Wood	19.80	26.50	35.25	47.25

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

TABLE I – Typical cost ranges.

Armories	6.92	9.99	14.40	20.75
Automotive centers	4.02	5.98	8.87	13.15
Auto dealerships, complete	4.10	6.13	9.13	13.65
Broadcasting facilities	4.35	6.38	9.37	13.75
Cold storage facilities	1.62	2.89	4.76	7.59
Computer centers	6.70	8.84	11.65	15.40
Creameries	8.24	13.00	20.20	31.00
Garages, minilube	7.76	12.40	19.35	29.75
Service, lower qualities	3.01	5.04	8.07	12.60
Higher qualities (incl. municipal service centers)	5.05	8.24	13.00	20.10
service shed	0.44	0.65	0.97	1.46
Storage	1.97	3.02	4.60	6.94
Underground parking	2.17	2.78	3.58	4.61
Hangars, storage	0.87	1.77	3.14	5.17
Maintenance and offices	2.96	5.35	8.90	14.20
Industrials, manufacturing, light	2.18	3.57	5.64	8.71
Heavy	7.87	9.44	11.35	13.65
Engineering and research	5.60	8.15	11.90	17.40
Laboratories	21.60	31.25	45.00	65.00
Lofts	2.90	5.29	8.85	14.15
Flex buildings	2.34	3.93	6.29	9.80
Miniwarehouses	0.49	1.31	2.53	4.39
High-rise facilities	0.78	1.68	3.02	5.02
Parking structures, parkades	0.90	1.75	3.03	4.96
Passenger terminals	9.87	14.55	21.45	31.50
Post offices, branch	5.38	7.25	9.74	13.15
Main	6.07	8.49	11.90	16.70
Processing facilities	6.67	9.22	12.75	17.70
Showrooms	5.92	8.32	11.70	16.50
T–hangars	0.62	1.05	1.68	2.62
Warehouses, storage	1.28	2.31	3.86	6.16
Distribution	3.34	5.02	7.53	11.25
Mega storage/distribution	0.44	0.94	1.68	2.78
Transit	4.95	6.42	8.32	10.80

TABLE II – ALTERNATE METHOD – Apply to total number of fixtures. Do not use these costs if Table I is used.

Cost per fixture	3,900	5,500	7,900	11,200
Cost per tap or drain without fixture	750	965	1,240	1,610

SPRINKLERS – Apply to sprinklered area. Costs include all piping for ordinary-hazard occupancies but do not include tanks. For extra-hazard occupancies, such as hangars, add 15% to the costs below. For supplemental in-rack systems, add 30% to 100% per level. For early-suppression, fast-response system, add $.74 plus $1.47 to $2.18 for pumps. Chemical systems: see UIP 3. For further discussion, see SEG Intro.

2,500 square feet	4.36	5.80	7.75	10.30
5,000	3.92	5.19	6.85	9.06
10,000	3.55	4.66	6.10	7.99
15,000	3.33	4.35	5.67	7.41
20,000	3.17	4.11	5.36	6.98
30,000	2.99	3.87	5.02	6.48
40,000	2.86	3.70	4.76	6.14
50,000	2.78	3.57	4.60	5.89
60,000	2.70	3.45	4.43	5.67
80,000	2.58	3.29	4.20	5.38
100,000	2.50	3.20	4.07	5.19

SPRINKLERS (Continued)

	1	2	3	4
125,000 square feet	2.42	3.06	3.90	4.96
150,000	2.34	2.98	3.79	4.80
200,000	2.25	2.86	3.61	4.57
250,000	2.18	2.74	3.46	4.36
300,000	2.12	2.67	3.34	4.18
400,000	2.05	2.56	3.20	3.98
600,000	1.90	2.37	2.96	3.71
800,000	1.83	2.28	2.84	3.54
1,000,000	1.75	2.18	2.71	3.37

HEATING, COOLING AND VENTILATING – Apply to total floor area.

Add or deduct 3% for each foot of variation in average story height from 14' base.

Costs are given for gas fired heating surfaces. Add or deduct as follows for other fuels.

Oil fired +7% Coal, stoker +7% Coal, hand-fired -2%

For Passenger Terminals, Research Labs and Cold Storage Buildings, use costs in the Calculator Section.

Heating Only				
Electric cable or baseboard	3.86	5.01	6.50	8.43
Radiant panels	3.67	4.38	5.20	6.20
Electric wall heaters (including FWA)	2.02	2.40	2.87	3.43
Forced air	4.41	5.69	7.37	9.52
Hot water, baseboard or radiators	7.13	9.49	12.65	16.85
Radiant floor	6.91	9.52	13.10	18.05
Radiant heat, gas, suspended	2.14	2.90	3.95	5.38
Space heaters, gas, with fan	1.78	2.48	3.46	4.80
Steam coil, with boiler	3.02	3.93	5.10	6.62
Steam coil, without boiler	2.14	2.87	3.86	5.19
Steam radiator, with boiler	6.81	8.80	11.35	14.70
Without boiler	5.48	7.28	9.64	12.80
Wall or floor furnace	2.14	2.61	3.17	3.86
Heating and Cooling				
Zoned A.C., hot and chilled water	18.50	24.45	32.25	42.75
Warm and cooled air	10.65	14.25	19.10	25.50
Package heating and cooling, short ducts	8.12	10.70	14.05	18.55
Heat–pump system	8.72	12.10	16.80	23.30
Add for ground loop heat source	2.25	3.27	4.76	6.91
Individual thru wall heat pump	3.79	5.19	7.13	9.75
Cooling Only				
Evaporative coolers	3.79	4.52	5.42	6.48
Refrigerated air conditioning only, zoned system	7.32	9.43	12.15	15.70
Package unit, short ducts	5.19	6.54	8.22	10.35
Ventilation only, with ducts & blowers	1.33	1.71	2.18	2.78

MISCELLANEOUS – Apply to square feet of floor area of described laminar flow coverage. These costs vary greatly and the following typical cost ranges should be used with caution.

Clean rooms,				
Class 100,000 to 10,000	242	326	432	575
Class 1,000 to 100	725	870	1,050	1,260
Class 100 to 10	1,210	2,110	3,425	5,400

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

ELECTRICAL AND LIGHTING – Apply to total floor area. Broadcasting facilities, computer centers, laboratories, passenger terminals and other buildings with heavy demand loads are not included in the general tables

	1	2	3	4
Few Outlets:				
Nonmetallic	2.71	3.57	4.71	6.23
Armored cable (BX)	3.30	4.32	5.64	7.38
Flexible conduit	3.95	5.14	6.70	8.72
Rigid conduit	4.79	6.19	7.99	10.30
Average Number of Outlets:				
Nonmetallic	4.74	6.22	8.12	10.60
Armored cable (BX)	5.66	7.40	9.64	12.60
Flexible conduit	6.73	8.77	11.45	14.95
Rigid conduit	8.03	10.45	13.65	17.75
Many Outlets:				
Nonmetallic	8.31	10.75	14.00	18.10
Armored cable (BX)	9.78	12.75	16.60	21.60
Flexible conduit	11.50	15.05	19.60	25.50
Rigid conduit	13.50	17.70	23.20	30.50
Unfinished Areas:				
Nonmetallic	1.69	2.25	3.01	4.01
Armored cable (BX)	2.12	2.77	3.61	4.73
Flexible conduit	2.62	3.36	4.33	5.57
Rigid conduit	3.23	4.07	5.14	6.50
Typical costs for some occupancies.				
Armories	9.30	12.00	15.40	19.90
Automotive centers	6.92	9.81	13.95	19.80
Auto dealerships, complete	9.44	13.45	19.25	27.50
Broadcasting facilities	19.30	26.50	36.50	50.50
Cold storage facilities	5.35	8.01	12.00	17.90
Computer centers	27.00	35.75	46.75	61.50
Creameries	6.44	10.25	16.00	24.55
Garages, mini–lube	8.27	12.60	19.10	28.75
Service, lower qualities	5.01	8.24	13.05	20.25
Higher qualities (incl. municipal service ctrs.)	8.31	14.15	22.85	35.75
Service shed	1.89	2.84	4.24	6.36
Storage	3.73	5.85	9.02	13.75
Underground parking	5.30	6.56	8.09	9.97
Hangars, storage	2.48	3.80	5.78	8.71
Maintenance and offices	6.97	10.45	15.75	23.50
Industrials, manufacturing, light	4.35	7.75	12.80	20.40
Heavy	18.05	22.25	27.50	33.75
Engineering and research	9.31	13.60	19.90	29.00
Laboratories	27.25	39.75	58.00	84.50
Lofts	6.47	10.20	15.90	24.30
Flex buildings	4.14	6.88	10.95	17.10
Mini warehouses	2.28	3.37	4.96	7.32
High-rise facilities	2.74	4.07	6.06	8.97
Parking structures, parkades	2.74	4.66	7.54	11.85
Passenger terminals	16.00	24.30	36.75	55.00
Post offices, branch	16.15	21.15	27.75	36.50
Main	17.40	23.00	30.25	40.25
Processing facilities	22.85	31.00	42.00	57.00
Showrooms	12.25	16.80	22.90	31.25
T–hangars	2.08	3.06	4.54	6.73
Warehouses, storage	2.06	3.62	6.00	9.49
Distribution	4.83	7.85	12.35	19.15
Mega storage/distribution	2.22	4.07	6.82	10.90
Transit	6.06	9.05	13.55	20.25

EXTERIOR WALL – Apply to total wall area.

Concrete or Masonry Walls

	1	2	3	4
Adobe or hollow clay block, 6''				
8"	26.75	30.25	34.50	39.00
12"	28.50	32.50	37.00	42.25
14"	32.50	37.00	41.75	48.00
Adobe block, grouted or cavity	36.00	40.75	46.75	53.00
22" – 24"	41.00	47.25	53.50	61.50
30'' – 32''	45.00	51.00	58.50	66.00
Block, concrete, 6''	23.30	26.50	30.00	34.25
8"	25.00	28.50	32.25	36.75
12"	28.75	32.50	36.75	41.50
16"	32.25	36.50	41.00	46.75
For each additional 4" of block, add	3.63	4.09	4.61	5.22
Block, grouted or cavity, 10'' – 12"	27.25	30.75	34.75	39.25
*Add for ornamented face block	1.90	2.87	4.31	6.46
Brick, block backup, 8"	30.00	34.25	39.00	44.25
12"	33.75	38.25	43.50	49.25
16"	37.00	41.75	48.00	54.00
Brick, common, 8''	33.75	38.25	43.50	49.25
12"	41.00	46.75	52.50	60.00
16"	49.25	56.00	62.50	70.50
For each additional 4" of brick, add	7.78	8.63	9.58	10.65
Brick, grouted or cavity, reinforced, 9''–10''	37.00	41.75	47.50	53.50
Block backup, 9''–10''	33.50	37.75	42.50	48.25
Block backup, 12''–14''	37.00	41.75	47.50	53.50
Brick, 6'' SCR modular	25.25	29.00	33.25	38.25
8"	28.50	32.25	36.75	41.50
*Add for face brick	4.14	4.55	5.02	5.52
Concrete, reinforced, formed, 4''	26.25	29.75	34.00	38.50
6"	28.00	32.00	36.50	41.00
8"	30.50	34.50	39.00	44.25
12"	35.00	39.25	44.75	50.00
For each additional 4" of concrete, add	4.35	4.74	5.15	5.59
Precast panels, 2"	21.70	24.65	28.00	31.75
4"	23.15	26.25	29.75	34.00
6"	25.25	28.75	32.75	37.00
8"	28.25	32.00	36.00	40.75
12"	33.25	37.50	41.75	47.25
Tilt–up panels, 4''	21.55	24.65	28.25	32.25
6"	23.05	26.50	30.25	35.00
8"	24.85	28.50	32.75	37.50
10"	26.75	30.75	35.25	40.25
12"	28.75	33.00	38.25	44.00
Add for insulated sandwich	2.28	2.81	3.46	4.27
Add for brick or tile inserts	8.30	10.15	12.45	15.20
Glass block, white or aqua	65.00	69.00	73.00	77.00
Colors or reflective	84.50	91.00	96.50	102.00
Local stone, block backup, ashlar veneer, 12''	54.00	62.00	71.50	81.50
Rubble or rustic, veneer, 12"	43.50	50.00	58.00	67.00
For each 4'' variation in thickness	3.68	4.12	4.63	5.20
Local field stone, in mortar, 12"	37.75	43.50	50.00	57.50
For each 4" variation in thickness	3.43	3.98	4.61	5.35
Local stone, rough cut, solid, 12"	65.00	77.00	92.00	110.00
Granite	66.50	83.00	102.00	128.00
Limestone	72.00	86.00	102.00	122.00
For each 6" variation in thickness	29.25	34.50	40.00	47.25
Rammed earth, soil cement, 24"	29.00	33.50	39.00	45.50
Pneumatic build–up, formed one side	45.75	52.00	59.00	66.50
For each 6" variation in thickness, add or deduct	1.84	2.12	2.46	2.85
Tile, structural clay, 6"	24.70	28.25	32.25	37.00
10"	29.00	33.25	37.75	43.50

***NOTE:** **The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face, or synthetic masonry veneer, see Wall Ornamentation on Page 8**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Concrete or Masonry Wall Extras

	1	2	3	4
Add for stay in place forming	1.47	1.99	2.68	3.63
Add for glazed block or tile each side	8.89	9.93	11.10	12.40
Add for pilasters	1.60	1.96	2.41	2.94
Add for bond beams	1.74	2.09	2.51	3.03
Add for seismic reinforcement	0.71	1.15	1.84	2.85
Add for synthetic plaster on rigid insulation (EIFS)	6.88	8.40	10.30	12.55
Deluxe, textured or aggregate	11.40	13.60	16.30	19.40
Add for thin masonry on rigid insulation	17.45	19.45	21.70	24.15
Add for clay tile backup in lieu of block	2.93	3.46	4.09	4.84
Add for earth sheltered waterproofing	1.30	1.97	3.00	4.51
Add for insulation	1.04	1.50	2.16	3.13
Earth sheltered structures	1.74	2.55	3.76	5.52

For special stonework, see UIP 6.

Curtain Walls

Brick or tile panels	33.75	40.50	48.25	58.00
Concrete and glass panels, precast	42.25	48.50	56.00	64.50
Glass fiber reinforced, molded	35.75	43.50	53.00	64.50
Metal and glass panels (ordinary)	46.00	54.50	64.50	76.00
Stainless steel or bronze and glass	68.50	79.00	92.00	106.00
Stone panels, local stone	63.00	69.50	77.50	84.50
Granite	68.00	77.50	87.50	100.00
Limestone or slate	64.50	70.50	79.00	86.00
Marble	65.50	73.50	83.00	93.50
Composite or aggregate panels	42.25	52.50	64.00	79.00
Structural glazed atrium including supports	102.00	136.00	181.00	242.00
Steel studs and stucco	24.90	29.00	34.00	39.75
Synthetic plaster on rigid Insulation (EIFS)	28.25	33.75	40.50	48.25
Deluxe, textured or aggregate	32.75	39.00	46.50	55.00
Wood or aggregate board siding	23.60	28.75	35.25	43.25
Add for insulation, insulated areas only	1.37	2.05	3.01	4.46

Pre-engineered Walls

Sandwich panels, alum. or steel, both sides	25.25	29.75	35.00	41.25
Cold storage, metal, both sides	31.50	36.25	41.50	47.50
Cement fiber or shotcrete, two sides	18.95	23.05	28.25	34.50
Fiberglass panels, two sides	24.30	29.50	35.75	43.00
Glass exterior, metal interior	28.25	33.25	39.50	46.50
add for stainless steel or textured Galbestos	4.43	5.27	6.29	7.50
Add for polylaminated (FRP) interior	1.22	1.49	1.80	2.18
Deduct for gypsum or hardboard interior	1.92	2.11	2.28	2.49
Prefabricated building panels				
Alum. or steel and glass panels	37.50	41.50	46.00	51.00
Add for porcelain enamel finish	3.85	4.57	5.45	6.47
Add for block backup	7.93	8.90	10.00	11.25
Stucco on steel panel	41.00	45.75	51.50	58.00
Veneer, block or brick, on Steel panel	46.00	53.00	60.50	69.00
Stone, rubble or rustic	59.50	66.00	72.50	80.50

EXTERIOR WALL (Continued)

Single-wall Construction

	1	2	3	4
Aluminum or steel, on steel frame	9.02	11.35	14.30	18.05
On wood frame	7.90	9.98	12.65	16.00
Add for porcelain enamel finish	3.85	4.57	5.45	6.47
Add for stainless steel or textured Galbestos	4.43	5.27	6.29	7.50
Cement fiber (Transite), on				
Steel frame	9.53	11.80	14.60	18.05
Sheet siding on wood frame	8.60	10.70	13.30	16.60
Siding or shingles on wood frame	9.40	11.55	14.25	17.55
Fiberglass light panels, on				
Steel frame	7.71	8.97	10.45	12.25
Sandwich panels	9.52	10.65	11.95	13.40
Heavy, FRP, over 8 oz	11.20	13.60	16.60	20.10
Light panels on wood frame	6.73	7.88	9.21	10.80
Sandwich panels	8.59	9.59	10.70	11.90
Heavy, FRP, over 8 oz	10.25	12.50	15.25	18.65
Glass panels	26.00	34.50	45.75	60.50
Projected greenhouse	62.00	71.00	82.00	92.00
Log, up to 10” diameter	23.70	31.50	41.50	55.00
Deluxe, hand hewn or oversized	33.50	42.75	55.00	70.50
Plywood, boards or siding,				
On steel frame	9.22	11.50	14.30	17.75
On wood frame	8.02	10.00	12.55	15.65
Stucco, on baled straw	21.60	25.75	31.00	37.25
Stucco, on wood frame	9.58	11.50	13.80	16.65
Synthetic plaster on rigid insul. (EIFS), on steel frame	14.10	17.00	20.65	24.95
Wood shingles on wood frame	9.74	11.75	14.15	17.05
Add for exterior sheathing, per layer	1.65	1.87	2.14	2.43
Add for interior sheathing or liner, finished	2.74	3.26	3.86	4.57
Polylaminated panel (FRP)	3.79	4.49	5.35	6.36
Add for stud wall backing	1.05	1.25	1.53	1.84
Add for insulation	1.02	1.22	1.49	1.78
Vinyl faced, exposed	1.33	1.49	1.65	1.84
Rigid board, faced	1.72	2.25	2.96	3.89
Add for air infiltration wrap	0.27	0.35	0.47	0.60

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)
Wood or Steel Stud Walls

	1	2	3	4
Alum. or steel siding, horizontal	19.75	23.20	27.50	32.25
Sheet panels	17.70	21.00	24.95	29.50
Asphalt siding	17.30	20.25	23.70	27.75
Cement fiber, siding or shingles,				
Horizontal	19.30	22.70	26.75	31.50
Sheet, embossed	18.20	21.20	24.80	29.00
Hardboard siding or shingles,				
Horizontal	19.10	22.15	25.75	30.00
Sheet, embossed	18.10	21.05	24.55	28.50
Plywood, textured	16.90	19.80	23.15	27.25
Deluxe, redwood, cedar, etc.	18.95	22.15	26.00	30.50
Shingles or shakes, wood	19.15	22.60	26.75	31.50
Stucco	19.60	23.05	27.25	32.00
Synthetic plaster on rigid				
insulation (EIFS)	22.85	27.00	32.00	38.00
Deluxe, textured or aggregate	26.75	31.75	37.50	44.50
Vinyl siding or shingles	19.60	23.05	27.25	32.00
Wood siding	18.20	21.45	25.00	29.50
Deluxe, redwood, cedar, etc.	19.80	23.50	28.00	33.25
log veneer siding	21.75	26.75	33.25	41.25
Deluxe, half round, full corners	33.75	38.75	43.50	49.25
Veneer, face block or concrete brick	24.60	28.75	33.50	39.00
Common brick	24.90	29.25	34.25	40.25
Face brick	28.50	33.25	38.75	45.00
Mortarless brick	29.00	33.50	38.75	44.50
Stone, ashlar veneer	43.50	51.00	60.00	70.50
Rubble or rustic	34.75	41.25	48.25	57.00
Synthetic veneer or panel	24.15	29.50	36.50	44.50
Thin veneer on rigid insulation	30.50	35.50	41.25	48.00
Add for sheathing	1.30	1.62	2.00	2.48
Add for seismic/wind bracing	0.72	0.90	1.08	1.31
Add for insulation	1.00	1.19	1.46	1.74
Add for air infiltration wrap	0.32	0.41	0.52	0.65
Add for air space wrap	0.96	1.08	1.22	1.37
Add for double–stud walls	2.02	2.46	3.01	3.67
Add for wood stresskin				
Sandwich panels	6.12	7.24	8.53	10.10

HANGAR DOORS – Per square foot of door. For fabric curtain doors, use rank 4 base costs where costs may vary from a plus 20% to minus 10%.

	1	2	3	4
Steel doors,				
Small hangars, to 20’ high	26.00	37.50	54.50	79.00
Medium hangars, to 40’ high	55.50	71.00	90.50	116.00
Large hangars, over 40’ high	84.50	105.00	129.00	159.00

MISCELLANEOUS – Apply to total square feet of lined area if required.

Secure compartmentalization,				
layered drywall	8.09	9.19	10.45	11.90
Metal shielding, radio frequency	33.75	46.00	63.00	86.00
radiation protection	19.60	24.80	31.50	39.75
Ballistic shielding,				
fiberglass panels	31.00	45.00	65.50	95.00
Cold storage, insulation board	2.48	3.34	4.49	6.06
for each inch over 2”, add	0.44	0.63	0.93	1.34

STAINED GLASS – Apply to art glass in window, dome or skylight area. These costs vary greatly, and the following typical cost ranges should be used with caution. See Section UIP 6 for complete description and detailed costs. For residential straight seams or simple bevel, deduct 50% from the Low Cost.

Low cost, plain, min. work or detailed				
bevel etched	100.00	136.00	189.00	258.00
Average, simple figures and				
scenes	318.00	423.00	565.00	760.00
High cost, highly detailed work				
(including domes)	680.00	935.00	1290.00	1770.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face, Roman or Norman	15.55	17.95	20.75	23.95
face, standard size	17.10	19.80	23.00	26.50
Mortarless brick	17.95	20.55	23.50	27.00
Select common	15.30	17.70	20.40	23.55
Used	16.65	19.15	22.05	25.25
Sim. veneer or panel, 1/4''– 3/8''	13.55	16.45	19.90	24.15
Thin veneer on rigid insulation	17.85	19.90	22.10	24.60
Add for pictorial carved artwork	220.00	249.00	287.00	326.00
Cement fiber siding	4.76	5.80	7.06	8.59
Concrete, ornamental cast stone	34.50	41.25	49.00	58.50
Concrete block, imitation flagstone	13.90	16.20	18.85	21.90
Solar screen	14.80	17.40	20.35	23.80
Ornamental face, slump, fluted, Split or ground	14.80	17.10	19.75	22.85
Glazed one side, add	8.94	10.05	11.25	12.60
Cut stone, carved	147.00	212.00	309.00	446.00
Glass block, white or aqua	56.50	62.00	68.50	76.00
Colors or solar reflective	79.00	86.00	93.50	102.00
Granite, ashlar or panel	72.00	83.00	95.00	110.00
Limestone, ashlar or panel	53.00	62.00	72.50	84.50
Local stone, ashlar veneer or panel	45.75	54.00	62.50	73.50
Rubble or rustic	33.25	39.75	47.50	57.00
Imitation precast stone	15.55	20.20	26.00	33.75
Marble, panels	58.50	68.50	80.50	93.50
Metal panels, screens, louvers	25.00	32.75	42.75	56.00
Preformed wall panels	4.51	8.15	13.60	21.80
Add for curved panels	1.30	1.87	2.70	3.89
Ornamental doorways	89.00	174.00	295.00	485.00
Slate, panels	51.00	58.50	67.50	77.50
Stucco	5.63	6.31	7.06	7.93
On masonry	4.76	5.30	5.89	6.57
Add for synthetic on rigid Insulation (EIFS)	3.51	4.48	5.73	7.32
*Built–up (EIFS) panel relief	7.50	9.56	12.20	15.55
Terra cotta	40.50	47.50	56.50	66.50
Tile, ceramic	19.60	22.55	26.00	29.75
*Mosaics	29.50	35.50	42.75	51.50
Hand painted tiles	159.00	220.00	302.00	415.00
Vinyl siding	4.95	5.82	6.87	8.09
Vitrolite (structural glass)	32.75	38.75	45.00	53.00
Wood, plywood	3.60	4.55	5.74	7.24
Shingles	5.03	5.99	7.14	8.47
Siding	4.72	5.79	7.11	8.75
Ornamented molding or trim	14.90	20.15	27.25	37.00
Add for treated wood	0.75	0.89	1.05	1.26
*Note - For pictorial artwork, add	15.90	22.15	31.00	43.00

BASEMENT WALLS – Apply to basement wall area.

	1	2	3	4
Concrete block, reinforced, 6''				
8”	15.70	17.75	20.20	22.90
12”	17.55	19.80	22.45	25.50
For each additional 4” of block, add	21.00	23.80	27.00	30.75
	3.76	4.20	4.70	5.27
Concrete, reinforced, 6”	19.10	21.50	24.30	27.50
8”	21.35	24.00	27.00	30.50
12”	25.75	29.00	32.25	36.25
16”	30.25	33.75	37.50	41.50
For each additional 4” of concrete, add	4.43	4.83	5.24	5.70
Masonry, brick, 8”	26.25	29.50	33.25	37.50
Stone, 12”	36.50	42.75	49.25	57.50
For each 4” variation in thickness	7.93	8.75	9.69	10.75
Wood, treated	14.10	17.40	21.60	26.75
Add for stay in place forming	0.96	1.38	2.05	2.99
Add for waterproofing	1.47	1.81	2.25	2.78
Earth sheltered structures	1.80	2.67	3.93	5.82
Add for insulation	1.09	1.56	2.22	3.18
Earth sheltered structures	1.74	2.58	3.80	5.61

For specific earth sheltered waterproofing, see Section UIP 1.

EXTERIOR AND BASEMENT STAIRS – Per riser.

Concrete	249.00	348.00	476.00	665.00
Steel pans or prefab. Concrete on steel	280.00	379.00	515.00	695.00
Steel or aluminum grating	318.00	423.00	560.00	750.00
Wood	89.00	140.00	214.00	331.00

For fire escapes, see Section UIP 5.

EXTERIOR BALCONIES – Apply to balcony area.

Concrete	27.25	35.75	46.50	60.50
Steel	25.50	35.00	47.50	65.50
Wood	21.00	28.75	39.00	53.50
Add for ornate finishes, balustrades	23.05	28.75	35.75	44.50

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

ROOF STRUCTURE – Apply to roof area.

	1	2	3	4
Concrete joists, slab	14.90	16.95	19.25	21.85
Lift slab	13.55	15.20	17.15	19.30
Pan or waffle slab and joists	13.80	15.55	17.50	19.75
Precast joists and deck	13.05	14.75	16.65	18.80
Precast joists, wood deck	10.40	11.70	13.15	14.75
Cored plank on bearing walls	11.60	13.10	14.75	16.65
Thin shell	22.20	26.50	31.25	37.00
Concrete dome, cast–in–place	51.00	56.00	61.00	66.50
Thin shell	32.75	36.75	41.00	46.50
Fabric roof, air supported	53.50	58.00	63.00	68.50
Tension supported	60.50	66.50	73.50	81.50
Add for thermal liner	5.20	6.34	7.77	9.47
Steel joists, concrete slab	16.85	19.45	22.60	26.25
Gypsum on formboard	7.57	9.99	13.20	17.45
Precast deck	14.75	17.10	19.75	22.80
Steel deck	7.92	10.70	14.40	19.40
Light-gauge truss joints	6.50	8.93	12.25	16.95
Steel deck, gypsum or concrete	10.65	13.85	18.10	23.40
Wood or composition deck	6.47	8.80	12.00	16.40
Light gauge truss joists	5.28	7.37	10.30	14.35
Open steel system for				
Corrugated metal	3.75	5.45	7.90	11.45
Light purlin supports only	1.83	2.37	3.07	3.98
Steel space frame and sheathing three dimensional	27.00	35.50	47.25	62.00
Architectural (exclusive of glazing)	46.25	69.00	103.00	154.00
Metal dome and cover	42.00	48.50	55.50	63.50
Glazed or translucent panels	88.50	111.00	137.00	171.00
Wood joists, wood or				
Composition deck	4.76	6.77	9.61	13.65
Exposed rafters, 2" T&G sheathing	7.69	10.20	13.60	18.00
Prefab. panels (exclusive of girders)	2.45	3.05	3.84	4.82
Stresskin sandwich panels (exclusive of purlins)	8.82	11.35	14.55	18.80
Add for snow roof, furred Sheathing layer	2.70	2.97	3.27	3.60
Open wood system for Corrugated metal	2.35	3.86	6.15	9.54
Light purlin supports only for metal, wood or fiberglass	0.89	1.25	1.73	2.41
Lamella	16.65	20.15	24.40	29.50
Wood dome and deck	26.00	32.25	40.25	49.75
Add for seismic/hurricane truss ties	0.49	0.59	0.69	0.84
Add for monitor roof	60%	50%	40%	40%
Add for sawtooth roof	40%	35%	30%	25%
Add for complex roof turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER – Apply to roof area.

	1	2	3	4
Aluminum or steel, corr., crimped or tile panels,				
Preformed, light, to 26 gauge	2.53	3.39	4.54	6.06
Heavy, under 26 gauge	5.36	6.36	7.54	8.94
Formed seam, flat or standing	6.39	8.35	10.90	14.30
Batten seam	7.50	9.66	12.50	16.15
Sandwich panels, pre–engineered	9.86	13.20	17.70	23.70
Cold storage	24.80	29.00	33.75	39.50
Shingles	5.11	6.41	8.03	10.05
Aggregate finish	6.66	8.35	10.50	13.20
Thatch	23.05	25.75	28.75	32.00
Add for interior liner, metal	2.39	2.81	3.33	3.92
Plastic	2.30	2.71	3.20	3.76
Add for porcelain enamel finish	3.85	4.57	5.45	6.47
Add for stainless steel or textured (Galbestos)	4.43	5.27	6.29	7.50
Asphalt, corrugated	2.05	2.46	2.96	3.58
Atrium skylight, frame and glazing	43.50	59.50	82.00	110.00
Built–up composition	2.30	3.05	4.05	5.36
Cement fiber, shingles	5.11	6.63	8.59	11.15
Corrugated or sheet (Transite)	4.61	6.79	10.00	14.70
Composition, roll, mineral surface	1.28	1.62	2.03	2.56
Composition shingles, light to 235#	2.30	2.67	3.08	3.58
Heavy, over 235# or laminated	2.99	3.89	5.05	6.57
Copper, flat or standing seam	15.40	18.20	21.60	25.50
Batten seam	16.65	19.60	23.15	27.25
Shingles	15.45	16.85	18.35	20.05
Elastomeric or modified				
Bitumen, single ply	4.17	5.64	7.62	10.30
Reinf. sheet or spray–fluid coat	7.25	8.72	10.55	12.70
Fiberglass, corrugated or sheet, light	2.56	3.11	3.80	4.61
Sandwich panels	4.61	5.33	6.19	7.17
Heavy, FRP, over 8 oz	5.11	6.63	8.55	11.10
Slate	9.78	12.10	15.05	18.65
Red	18.95	23.50	29.25	36.25
Composite, reinforced fiber	6.98	8.69	10.85	13.55
Terne, flat or standing seam	14.20	17.00	20.35	24.40
Batten seam	15.40	18.35	21.95	26.25
Tile, clay	8.27	11.20	15.15	20.55
Concrete	6.57	7.94	9.58	11.60
Plastic or rubber	5.70	6.84	8.16	9.78
Add for custom coloring or glazing	1.78	2.28	2.93	3.76
Wood, shakes	4.72	5.58	6.61	7.83
Shingles	4.14	4.99	6.01	7.24
Fiber shingles	2.99	3.64	4.42	5.36
Plywood sheets	1.65	1.94	2.27	2.64
Add for fire–resistant finish	0.71	0.87	1.06	1.30
Add for roof insulation	1.30	2.03	3.09	4.71
Earth sheltered structures	1.89	3.08	4.88	7.54
Add for earth sheltered waterproofing	1.64	2.58	3.96	6.06

NOTE: For underroof insulation and supporting structures, see Ceiling Extras on Page 3. For specific earth-sheltered waterproofing, see Section UIP 1. For earthen roof cover, see Fill costs on Page 1. For cold storage insulation, see Ceiling Extras or Section UIP 7 for detailed costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GARAGES, INDUSTRIALS, LOFTS AND WAREHOUSES

SECTION SEG 4
(SEGREGATED COST METHOD)

ROOF MODIFIERS – Use the following multipliers for sloping roofs 6' : 12' or greater to convert the unit costs to cost per square foot of horizontal roofed area.

Rise	:	Run	Multiplier	Rise	:	Run	Multiplier
6'	:	12'	1.12	12'	:	12'	1.42
8'	:	12'	1.20	18'	:	12'	1.80

TRUSSES AND GIRDERS – Apply to area supported.

	1	2	3	4
Steel trusses or longspan girders	3.63	4.79	6.32	8.35
Timber trusses	3.86	5.10	6.75	8.91
Glued, laminated trusses or girders	3.58	4.66	6.07	7.90

CANOPIES OR MARQUEES – Apply to horizontal area. For light false mansard structures, deduct 50%. For greater detail, see Section UIP 4 or 6.

Wood frame	32.50	40.25	50.00	62.50
Steel frame	42.25	54.00	68.50	87.00

MISCELLANEOUS

Automotive lifts	Section UIP 11
Automotive repair and lube equipment	Section UIP 12
Automotive spray booths	Section UIP 12
Cranes, elevators and material handling	Section UIP 7
Security systems	Section UIP 3
Shipping dock equipment	Section UIP 12
Site paving and fencing, railroad spurs	Section UIP 13
Sound systems	Section UIP 2
Storage tanks	Section UIP 8
Warehouse racks and equipment	Section UIP 12

NUMBER OF STORIES MULTIPLIER

To allow for the cost of hoisting materials, increased labor costs, and miscellaneous costs due to high-rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% for each story over three.

Example: Seven-story building: Multiplier = 1.010

SPECIAL HEIGHT MULTIPLIER – TALL BUILDINGS

To allow for the cost of hoisting materials, increased labor costs, and other increased costs due to great wall heights on major hangars or other tall single-story buildings, multiply the total Segregated Cost of these buildings by 100% plus .25% for each foot over 30 feet of wall height.

Example: Story height = 50 feet: Multiplier = 1.050

COMPLETION OF BUILDING VALUATION

Contractors' overhead and profit, sales taxes, permit fees, and insurance during construction are included in the above costs. Interest on interim construction financing is also included, but not financing costs, real estate taxes, or broker's commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers which bring the basic costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

Office buildings, medical buildings and public buildings comprise a wide range of buildings from the small neighborhood office to the multistory skyscraper. Within each group, certain segregated costs may vary greatly.

Interior construction in most of these buildings usually can be priced on the square foot basis; however, in buildings such as offices with large open areas, it may be advisable to verify by the built-up cost method in Section UIP 2.

Miscellaneous interior additives include special items found in some buildings, which are not usually included in the general contract for the building, but are a necessary part of the occupancy.

Mixed occupancies should be valued by separating the areas and pricing each occupancy on its individual basis.

Plumbing costs are given on the basis of floor area; however, it may be better in many cases to make an actual count of fixtures and to price them from Section UIP 3.

SEGREGATED COSTS

(For explanation of the rating numbers see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation, bulk (per cu. ft.)	0.49	0.66	0.91	1.24
Seismic, dry moat (per cu. ft.)	0.77	0.94	1.16	1.46
Fill (per cu. ft. of compacted earth)	0.50	0.63	0.83	1.05
Site preparation (per sq. ft. of site)	0.44	0.56	0.71	0.91

FOUNDATION – Apply to total floor area including basements, but excluding mezzanines or balconies.

Class A	3.93	5.08	6.59	8.52
Class B	4.15	5.32	6.79	8.69
Class C, bearing wall	3.63	4.73	6.13	7.94
Nonbearing wall	3.49	4.53	5.87	7.62
Class D, masonry veneer	3.21	4.20	5.49	7.18
Siding or stucco	2.84	3.71	4.86	6.34
Pole frame construction	2.70	3.47	4.50	5.82
Class S	2.87	3.77	4.97	6.52
Classes C, D and S, light perimeter foundation for open shell type structures	1.12	1.45	1.89	2.44
Add for perimeter insulation, Ground floor area only	0.16	0.27	0.40	0.59
Earth sheltered structures	0.22	0.37	0.56	0.85
Add for seismic, base isolators	7.03	10.10	14.55	20.85
damping devices	2.74	3.73	5.08	6.94
Lifeline structures (hospitals, etc.)	6.17	8.12	10.65	13.95

FOUNDATION ADJUSTMENTS – Apply to base cost used.

Add 2% for each foot over 12' average story height.
Deduct 2% for each foot under 12' average story height.
For multistory buildings deduct .8% for each story over one, aboveground. For one story buildings with foundations and footings formed and poured monolithically with floor slabs, use 70% of the above costs, for that floor only. Add for pilings from Section UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

FRAME – Apply to total floor area including basements, but excluding mezzanines or balconies.

Bearing walls, wood or steel floor supports only	2.19	2.60	3.05	3.60
Masonry supports only	3.21	3.78	4.47	5.26
Steel, fireproofed, Class A	24.15	29.50	36.00	44.00
Composite, concrete steel, Class B	20.80	24.85	29.75	35.50
Concrete, reinforced, Class B	20.55	24.85	30.00	36.50
precast, post tensioned	19.60	23.25	27.75	33.00
Steel, Classes C and D	8.63	10.75	13.35	16.70
Class S	8.13	10.15	12.70	15.85
Light pre–engineered frame	5.12	6.39	7.95	9.92
Light tubular/pipe frame	3.20	4.17	5.45	7.10
Add for fireproofing	1.39	2.22	3.44	5.29
Steel columns, wood beams	5.98	7.84	10.30	13.50
Wood, A–frame construction	6.87	8.32	10.05	12.15
Laminated bents and arches	7.81	9.39	11.30	13.60
Light arch rib construction	4.99	6.11	7.47	9.13
Mill type (heavy timber) construction	8.17	9.85	11.90	14.30
Heavy timber/log construction, Architectural	16.85	21.15	26.50	33.25
Post and beam construction	5.62	6.81	8.26	10.00
Light pole–type construction	3.34	4.23	5.33	6.74
Add for seismic/wind bracing, Classes A and B	4.88	7.01	10.10	14.45
Open Classes C, D and S frames	1.28	1.59	1.99	2.50
Damping devices	1.94	2.56	3.39	4.46

FRAME ADJUSTMENTS – Apply to base cost used.

Add 3% for each foot of average story height over the 12' base height. Deduct 3% for each foot under the 12' base. For multistory buildings, add 2% for each story over one, aboveground, to apply against the total floor area, up to 30 stories; over 30, add 1% for each additional story. For partially framed structures, see Section UIP 1.

FLOOR STRUCTURE – Apply to area of described floor or mezzanine. For stepped balconies, see table below:

	1	2	3	4
Concrete, on ground excluding vapor barrier	5.92	7.05	8.39	9.97
Stepped incline	7.78	9.18	10.80	12.75
Lift slab	16.65	18.75	21.10	23.70
Elevated flat slab and joists	18.65	21.10	23.85	27.00
Pan or waffle slab and joists	17.10	19.25	21.70	24.45
Precast joists and deck	16.30	18.40	20.70	23.20
Precast joists, wood sheathing	12.65	14.25	16.05	18.10
Cored plank on bearing walls	14.15	16.05	18.25	20.60
Steel joists: flat slab	20.60	23.50	27.00	31.00
Corrugated deck and concrete	17.10	20.20	23.70	28.00
Cellular deck and concrete	21.40	24.95	29.00	33.75
Open metal grating	30.25	40.75	55.00	74.00
Precast deck	17.95	20.30	23.00	26.00
Wood sheathing	9.82	12.40	15.80	19.90
Light gauge truss joints	8.86	11.25	14.25	18.10
Wood joists and sheathing	8.47	10.75	13.65	17.30
Wood joists and bridging only	6.52	8.52	11.15	14.55

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	1.03	1.47	2.09	2.98
Each inch of slab on grade over 10", add	0.68	0.80	0.93	1.08
Each inch of sheathing over 1", add	1.90	2.14	2.42	2.71
Foamed concrete surfacing, 1" - 2"	1.53	1.89	2.30	2.81
Floor insulation, add	1.08	1.34	1.65	2.05

STEPPED BALCONY STRUCTURES – Apply to horizontal area of balcony. Add for soffit finish, floor covering and electrical for complete balcony cost.

Wood	24.30	29.25	35.25	42.25
Concrete	34.00	39.50	45.75	52.50
Structural steel and concrete	38.00	43.75	51.00	59.50
Structural steel and wood	30.00	35.00	41.00	48.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

FLOOR COVER – Apply to area of described floor.

	1	2	3	4
Access (computer) floor,				
On stanchions	29.00	34.00	40.25	47.25
Full office floors	18.70	21.90	25.50	29.50
Asphalt tile	3.26	3.79	4.42	5.14
Bamboo, laminated plank	16.20	19.15	22.60	26.75
Brick pavers, in concrete	15.70	18.50	21.90	25.75
Carpet and pad	4.38	6.67	10.10	15.25
Custom carpet and pad	15.05	24.25	38.25	59.00
Indoor/outdoor	3.09	4.05	5.35	7.03
Color, concrete	1.65	2.02	2.48	3.03
Cork	8.84	10.10	11.55	13.25
Diato, magnesite, etc.	11.30	13.05	15.10	17.40
Flagstone, random local stone,				
in concrete	21.30	24.90	29.00	34.00
Hardener and sealer, concrete	1.33	1.78	2.37	3.17
*Hardwood	13.05	16.80	21.60	27.75
Sports gym floors on resilient				
sleepers	14.70	17.85	21.50	26.00
Leather	56.50	65.50	76.00	87.50
Linoleum	5.66	6.70	7.94	9.40
Marble or granite	39.50	54.00	73.50	102.00
Cast tile	23.55	27.50	31.75	36.75
Melamine laminated tile or sheet	5.05	6.73	8.97	11.95
Deluxe	11.70	13.50	15.55	17.90
Plastic tile, interlocking	10.75	11.90	13.20	14.60
Rubber fabric tile	14.90	17.30	19.95	23.15
Rubber tile or sheet	6.69	8.97	12.05	16.20
Seamless plastic, epoxy,				
urethane, neoprene,				
1/32" – 1/16" thincoat	6.17	7.53	9.16	11.15
1/8" – 3/8"	9.71	11.95	14.80	18.20
Add for colored chips or glitter	2.50	3.11	3.86	4.80
Slate, grouted	23.85	27.75	32.50	38.00
Softwood	9.84	11.65	13.80	16.25
Stone plank	23.15	27.75	33.25	40.25
Synthetic sports surfacing	11.85	14.60	17.95	22.05
Terrazzo (exclusive of base slab)	17.10	20.75	25.50	31.00
tile	30.75	35.00	39.75	45.25
Tile, ceramic or quarry	17.10	21.15	26.25	32.75
Custom tile	38.00	45.25	54.00	65.00
*Wood over concrete, hardwood	14.85	18.70	23.80	30.00
Parquet block, prefinished, in				
Mastic	15.40	20.65	27.75	37.50
Softwood	11.35	13.30	15.50	18.05
Vinyl composition tile or sheet	3.17	4.05	5.20	6.69
Vinyl sheet	5.48	7.37	9.87	13.25
Vinyl tile	5.92	8.38	11.90	16.95
*Add for custom wood floors	9.84	19.35	33.50	55.00
Add for pictorial artwork	15.45	21.35	29.75	41.25

Add 15% for conductive floor coverings.

CEILING – Apply to area of described ceiling. To convert costs to floor area for high-pitched ceilings, use the roof slope multipliers on Page 9.

Acoustic ceilings, tile or panels:				
Metal panels incl. pads &				
suspension system	11.05	13.65	16.85	20.70
Clean room panels, incl.				
Suspension system	17.25	19.00	20.90	23.15
Mineral fiber, fiberglass,				
panels only	2.68	3.68	5.04	6.92
Organic fiber, wood or cane,				
Panels only	3.17	3.64	4.17	4.80
Embossed metal	9.47	12.50	16.60	21.75
Fiber sports court panel with				
suspension systems	8.91	10.70	12.90	15.55
Gypsum board, taped and painted	3.14	3.46	3.79	4.15
spray on texture	3.03	3.26	3.51	3.76
Mirror faced panels	30.00	32.75	36.00	39.50
Paint or stain, bottom of roof or floor	1.08	1.38	1.75	2.24

CEILING (Continued)

	1	2	3	4
Plaster on lath: acoustical	6.36	7.07	7.88	8.74
Spray on, thincoat with texture				
on lath or drywall	4.55	4.98	5.45	5.97
Standard, add 20% for Keene's	5.51	6.17	6.91	7.73
Add for metal lath	0.77	0.90	1.06	1.25
Plaster on masonry soffit: acoustical	5.45	6.06	6.73	7.50
Spray–on, thincoat with texture	3.62	3.93	4.26	4.64
Standard, add 23% for Keene's	4.63	5.16	5.75	6.41
Plaster panels, dec., panels only	20.20	22.25	24.55	27.00
Plastic panels, with suspension system				
but exclude lighting,	10.50	12.40	14.60	17.25
Plywood (softwood) or				
Hardboard panels	4.88	5.53	6.31	7.18
Hardwood	7.11	8.40	9.94	11.75
Coffered or vaulted panel				
with molding	15.20	20.45	27.50	37.00
Custom woods, site built	38.00	44.00	51.00	58.50
Polylaminated panels (FRP)	4.96	5.47	6.01	6.60
Insulated panel	7.28	8.16	9.15	10.25
Softwood	4.70	5.41	6.24	7.18
Hardwood	7.71	8.88	10.20	11.75
Carved, decorative	14.55	20.35	28.50	40.25

CEILING EXTRAS – Add to ceiling costs. For special ornamentation see Section UIP 2.

Ceramic tile, add	21.00	26.25	33.25	41.50
Custom tile, decorative	43.75	52.50	62.00	73.50
Custom papers, stenciling, staff, a	21.00	28.00	37.25	49.75
Border or coving only	5.14	6.50	8.19	10.35
Extensive decorating, cust. plaster				
Terra cotta, add	57.50	72.00	91.50	114.00
Wood furring	1.46	1.79	2.18	2.65
Metal furring	2.28	2.86	3.55	4.43
If ceiling structure is required				
which is not part of the roof or				
floor structure, add	2.37	2.95	3.65	4.52
Suspended ceiling, metal				
suspension sys., add	2.20	2.73	3.39	4.18
Fiberglass, FRP	3.54	4.13	4.83	5.66
Hardwood, decorative	5.91	7.97	10.75	14.50
For seismic supports, add	0.37	0.47	0.60	0.78
Ceiling insulation, add	1.09	1.37	1.69	2.11
Vinyl faced, exposed	1.52	1.74	2.00	2.30
Add for underdeck supporting ba	0.49	0.57	0.66	0.80
Rigid board, faced	2.15	2.83	3.68	4.80

For ceiling domes, see stained glass, Page 7.

BANK VAULTS – Per square foot of vault area. Add or deduct 2% for each foot of height variation from the 12' standard. For more detailed costs see Section UIP 2.

Money	258.00	303.00	357.00	423.00
Record storage	105.00	117.00	130.00	146.00
Modular vault systems, security	80.50	114.00	159.00	228.00
Insulated/record storage	68.00	83.00	103.00	127.00

MEZZANINES – Apply to open mezzanine area. (Cost of miscellaneous items such as rails, stairs, etc.)

Mezzanine	4.80	5.58	6.48	7.54

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

INTERIOR CONSTRUCTION – Apply to total floor area. See Section UIP 2 if detailed costs are desired. General hospital interiors include Group I equipment.

Add or deduct 5% for each foot of variation from 12' average story height. Add for fixed seating from Section UIP 12.

FRAME INTERIOR PARTITIONS

	1	2	3	4
Banks (excluding vaults),				
branch, Classes A and B	61.50	76.00	94.00	116.00
Classes C, D and S	52.50	66.50	83.50	105.00
Central offices, Classes A and B	56.50	70.00	86.50	107.00
Classes C, D and S	47.25	59.50	75.00	94.50
Convalescent hospitals,				
Classes A and B	59.00	69.50	82.00	96.00
Classes C, D and S	39.25	50.00	63.50	80.50
Dispensaries	27.75	33.75	41.25	50.50
Fire stations, staffed	38.00	54.00	77.50	109.00
Volunteer	7.84	14.10	23.50	37.50
General hospitals,				
Classes A and B	108.00	134.00	170.00	209.00
Classes C, D and S	71.00	88.50	110.00	135.00
Governmental buildings,				
Classes A and B	47.00	61.00	79.00	102.00
Classes C, D and S	40.75	52.50	67.50	87.50
Community service buildings,				
Classes A and B	37.50	49.25	64.00	83.50
Classes C, D and S	32.75	43.00	56.00	72.50
Jails (excluding jail hardware),				
Correctional facilities	29.50	38.00	49.00	62.50
Police stations	24.45	32.75	43.75	59.00
Medical office buildings,				
Classes A and B	57.50	68.00	80.50	94.00
Classes C, D and S	53.50	61.00	70.00	79.50
Dental clinics	58.00	69.00	82.00	98.50
Office buildings,				
Classes A and B	43.50	54.00	67.00	83.50
Classes C, D and S	33.00	43.00	55.50	71.50
Outpatient (surgical) centers	86.00	108.00	133.00	166.00
Public libraries (excl. book stacks),				
Classes A/B	58.50	76.50	101.00	131.00
Classes C, D and S	46.50	63.50	87.50	120.00
Veterinary hospitals	52.00	62.00	74.50	90.00
Kennels	25.25	33.75	45.25	60.00

MASONRY INTERIOR PARTITIONS

Banks (excluding vaults), branch,				
Classes A and B	66.50	82.00	101.00	122.00
Classes C, D and S	57.00	71.50	90.00	113.00
Central offices, Classes A and B	60.50	74.50	92.50	114.00
Classes C, D and S	51.00	64.00	79.50	100.00
Convalescent hospitals,				
Classes A and B	64.00	74.50	86.50	102.00
Classes C, D and S	43.00	54.00	68.50	87.50
Dispensaries	29.50	35.75	43.50	52.50
Fire stations, staffed	41.25	58.00	82.00	116.00
Volunteer	9.22	15.90	26.00	41.00
General hospitals,				
Classes A and B	114.00	142.00	177.00	216.00
Classes C, D and S	76.50	94.50	116.00	141.00
Governmental buildings,				
Classes A and B	51.50	66.00	85.00	110.00
Classes C, D and S	44.25	56.50	72.50	93.00
Community service buildings,				
Classes A and B	41.25	53.50	69.00	89.50
Classes C, D and S	35.75	46.50	60.50	78.00

MASONRY INTERIOR PARTITIONS (Continuation)

	1	2	3	4
Jails (excluding jail hardware),				
correctional facilities	32.50	41.25	52.50	67.00
Police stations	27.00	36.00	48.00	63.50
Medical office buildings,				
Classes A and B	62.50	72.50	85.00	99.00
Classes C, D and S	57.50	65.00	74.00	83.50
Dental clinics	63.00	74.50	87.50	105.00
Office buildings,				
Classes A and B	47.25	58.50	72.50	89.50
Classes C, D and S	36.25	46.50	59.50	76.50
Outpatient (surgical) centers	94.50	114.00	138.00	166.00
Public libraries (excluding book stacks)				
Classes A/B	63.50	82.00	107.00	139.00
Classes C, D and S	50.00	68.50	93.00	126.00
Veterinary hospitals	56.50	67.50	80.50	97.00
Kennels	28.00	37.25	49.00	65.00

MISCELLANEOUS – Apply to total square feet of building area, if required. These costs vary greatly, and the following typical cost ranges should be used with caution. Built-in equipment which is normally included under the general contract is included in the interior construction costs.

	1	2	3	4
Bank equipment,				
counters, vault doors, etc.	40.25	55.00	76.00	105.00
Jail equipment, cell blocks,				
locking devices, etc.	23.15	38.25	61.00	94.50
Police stations	3.68	6.10	9.69	15.15
Hospital equipment,				
Groups II and III	36.00	62.00	102.00	159.00
Hospital pneumatic conveyor system	4.70	5.51	6.45	7.54
Library equipment, bookstacks, etc.	18.70	33.25	55.00	87.50

SPRINKLERS – Apply to sprinklered area. Costs include all piping and connections to main for light hazard occupancies, but do not include tanks. For double sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost.

1,500 square feet	5.83	7.56	9.78	12.65
2,000	5.55	7.17	9.25	11.95
3,000	5.20	6.69	8.60	11.05
5,000	4.83	6.16	7.88	10.05
10,000	4.35	5.51	6.98	8.84
15,000	4.04	5.11	6.48	8.18
20,000	3.87	4.89	6.16	7.76
30,000	3.65	4.57	5.72	7.16
50,000	3.37	4.18	5.22	6.51
75,000	3.17	3.92	4.86	6.03
100,000	3.05	3.74	4.63	5.72
125,000	2.92	3.59	4.42	5.47
150,000	2.86	3.51	4.32	5.30
200,000	2.73	3.34	4.08	4.99
250,000	2.62	3.21	3.93	4.82
300,000	2.56	3.12	3.82	4.64
400,000	2.46	2.99	3.62	4.41
500,000	2.36	2.86	3.48	4.20

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

PLUMBING – Apply to total floor area or use Section UIP 3 for cost per fixture. The following costs represent typical ranges only.

	1	2	3	4
Banks, branch and mini banks	7.15	11.25	17.45	26.75
central office	6.41	10.55	16.85	26.00
Convalescent hospitals	14.55	19.95	27.50	37.50
Dispensaries	9.71	13.15	17.95	24.30
Fire stations, staffed	9.40	15.70	24.95	39.00
Volunteer	4.88	8.09	12.90	20.05
General hospitals	21.15	31.00	45.75	66.50
Governmental buildings	9.08	13.95	21.20	32.25
Community service buildings	6.32	10.05	15.70	24.10
Jails, correctional facilities	18.40	26.25	37.50	54.00
Police stations	12.35	17.10	23.35	32.25
Medical office buildings	10.85	16.50	24.70	37.25
Dental clinics	11.50	17.10	25.25	37.50
Office buildings	4.26	7.59	12.50	19.90
Outpatient (surgical) centers	18.35	24.90	34.00	46.50
Public libraries	6.28	9.58	14.50	21.90
Veterinary hospitals	11.85	16.60	22.85	31.75
Kennels	6.75	9.72	14.00	20.20

HEATING, COOLING, AND VENTILATING – Apply to total floor area.

Add or deduct 3% for each foot of variation in average story height from 12' base.

Costs are given for gas fired heating surfaces. Add or deduct as follows for other fuels.

Oil fired + 7% Coal, stoker + 7% Coal, hand fired - 2%

For General Hospitals and Outpatient Surgical Centers use costs in the Calculator Section.

Heating Only

Electric, cable or baseboard	5.51	7.88	11.20	16.05
Radiant panels	4.98	6.51	8.49	11.05
Electric wall heaters (including FWA)	2.64	3.23	3.93	4.80
Forced air	6.08	8.72	12.55	18.05
Hot water, baseboard or radiators	9.78	13.85	19.60	27.75
Radiant floor or ceiling	9.40	13.60	19.65	28.50
Radiant heat, gas, suspended	2.28	3.27	4.71	6.79
Space heaters, gas, with fan	1.72	2.61	3.93	5.91
Steam radiator, with boiler	9.08	12.90	18.40	26.25
Without boiler	7.44	11.00	16.30	24.10
Wall or floor furnace	2.73	3.40	4.21	5.24

Heating and Cooling

Zoned A.C., hot and chilled water	24.90	33.00	43.75	58.50
Warm and cooled air	14.90	20.90	29.50	41.50
Package heating and cooling, short ducts	8.59	12.35	17.85	25.50
Heat pump system	11.25	16.35	23.80	34.75
Add for ground loop heat source	2.73	4.18	6.38	9.64
Individual thru wall heat pumps	4.36	6.13	8.62	12.10

Cooling Only

Evaporative coolers	4.36	5.24	6.34	7.63
Refrigerated air conditioning only,				
Zoned system	8.35	11.10	14.90	19.75
Package unit, short ducts	5.91	7.87	10.45	13.90
Ventilation only,				
with ducts and blowers	1.72	2.42	3.39	4.70

ELECTRICAL AND LIGHTING – Apply to total floor area. General hospitals are not included in the general tables.

	1	2	3	4
Few Outlets:				
Nonmetallic	7.69	10.05	13.15	17.25
Armored cable (BX)	9.31	12.10	15.75	20.40
Flexible conduit	11.25	14.55	18.70	24.30
Rigid conduit	13.65	17.60	22.45	29.00
Average Number of Outlets:				
Nonmetallic	10.75	13.85	17.90	23.00
Armored cable (BX)	13.15	17.10	21.95	28.25
Flexible conduit	16.20	20.90	27.00	35.00
Rigid conduit	19.75	25.75	33.50	43.50
Many Outlets:				
Nonmetallic	15.15	19.10	24.15	30.50
Armored cable (BX)	18.55	23.85	30.75	39.50
Flexible conduit	23.15	30.00	39.00	51.00
Rigid conduit	28.50	37.50	49.75	65.00

For undercarpet cable systems; deduct 10% from base costs for that floor only.

Unfinished Areas:

Nonmetallic	2.98	3.54	4.17	4.96
Armored cable (BX)	3.54	4.17	4.95	5.86
Flexible conduit	4.17	4.94	5.83	6.90
Rigid conduit	4.92	5.82	6.88	8.12

Typical costs for selected occupancies.

Banks, branch,				
Classes A and B	24.40	34.25	48.50	68.00
Classes C, D and S	21.00	29.75	42.50	60.50
Central office, Classes A and B	22.15	31.75	45.00	65.00
Classes C, D and S	19.30	27.25	39.25	56.00
Mini banks	27.75	38.25	53.00	73.50
Convalescent hospitals	17.90	25.25	35.75	51.00
Dispensaries	14.45	18.40	23.30	29.50
Fire stations, staffed	11.55	19.35	31.00	48.50
Volunteer	5.85	9.15	14.10	21.50
General hospitals,				
Classes A and B	38.25	52.50	72.00	99.00
Classes C, D and S	28.75	37.75	49.50	64.50
Governmental buildings,				
Classes A and B	19.35	29.50	44.75	67.00
Classes C, D and S	16.75	25.25	38.25	57.50
Community service buildings,				
Classes A and B	16.15	23.50	34.25	50.50
Classes C, D and S	13.85	20.00	29.00	41.75
Jails, correctional facilities	22.75	34.25	51.50	77.50
Police stations	19.30	27.50	39.75	57.00
Medical office buildings,				
Classes A and B	15.45	22.65	33.50	50.00
Classes C, D and S	12.35	17.90	26.00	37.75
Dental clinics	13.15	19.80	29.75	45.00
Office buildings, Classes A and B	11.95	23.35	40.50	66.00
Classes C, D and S	8.53	17.30	30.50	50.00
Outpatient (surgical) centers	21.75	31.50	45.75	66.00
Public libraries, Classes A and B	20.85	28.25	39.00	53.50
Classes C, D and S	15.95	22.50	32.25	46.25
Veterinary hospitals	14.95	19.95	26.75	35.75
Kennels	9.89	14.15	20.20	29.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

EXTERIOR WALL – Apply to total wall area.

Concrete or Masonry Walls	1	2	3	4
Adobe or hollow clay block, 6”	32.50	36.75	41.50	46.50
8”	35.25	39.75	45.00	50.50
12”	40.00	45.50	51.00	57.50
14”	44.25	49.75	56.00	63.00
Adobe block,				
Grouted or cavity, 22” – 24”	51.00	57.50	65.00	73.50
30” – 32”	55.00	62.00	70.00	78.50
Block, concrete, 6”	28.50	32.00	36.00	40.25
8”	30.50	34.50	38.50	43.50
12”	35.00	39.00	44.00	49.25
16”	39.00	44.00	49.25	55.50
For each additional 4” of block, add	4.22	4.71	5.28	5.91
Block, grouted or cavity, 10” – 12”	32.75	37.00	41.50	46.50
*Add for ornamented face block	2.13	3.16	4.66	6.93
Brick, block back–up, 8”	36.75	41.75	46.75	52.50
12”	41.50	46.50	52.00	58.50
16”	45.50	51.00	57.50	65.00
Brick, common, 8”	41.50	46.50	52.00	58.50
12”	49.25	55.50	62.00	69.50
16”	57.50	64.00	71.50	80.00
For each additional 4” of brick, add	8.32	9.20	10.20	11.25
Brick, grouted or cavity,				
Reinforced, 9” – 10”	45.00	50.50	56.50	63.50
Block back–up, 9” – 10”	41.50	46.50	52.00	58.50
Block back–up, 12” – 14”	45.00	50.50	57.50	64.00
Brick, SCR modular, 6”	31.50	35.50	40.00	45.50
8”	35.00	39.25	44.25	49.75
*Add for face brick	4.55	5.02	5.52	6.08
Concrete, reinforced, formed, 4”	32.00	36.00	40.75	46.00
6”	34.50	38.50	43.50	49.00
8”	36.75	41.75	46.50	52.00
12”	42.25	46.75	52.00	58.50
For each additional 4” of concrete, add	4.80	5.29	5.81	6.41
Precast panels, 2”	26.50	30.00	33.50	37.75
4”	28.50	32.00	36.00	40.25
6”	31.25	35.00	39.00	44.00
8”	34.50	38.50	43.25	48.00
12”	40.25	45.00	49.75	55.00
Tilt–up panels, 4”	26.75	30.25	34.25	38.50
6”	28.50	32.50	37.00	42.25
8”	30.75	35.00	39.75	45.00
10”	33.25	37.75	43.25	48.75
12”	36.00	40.75	46.50	52.50
Add for insulated sandwich	2.38	2.97	3.72	4.64
Add for brick or tile inserts	8.86	11.10	13.90	17.35
Glass block, white or aqua	71.50	77.00	81.50	88.00
Colors or reflective	95.00	101.00	107.00	113.00
Local stone, block back–up,				
Ashlar veneer, 12”	67.50	77.00	88.00	99.50
Rubble or rustic, veneer, 12”	55.00	62.50	73.00	83.50
For each 4” variation in thickness	4.22	4.71	5.28	5.91
Local fieldstone, in mortar, 12”	48.25	54.50	61.00	69.00
For each 4” variation in thickness	4.06	4.70	5.46	6.34
Local stone, rough cut, solid, 12”	69.50	85.00	104.00	128.00
Granite	73.50	93.50	122.00	156.00
Limestone	78.50	96.50	117.00	143.00
For each 6” variation in thickness	31.50	37.75	45.50	54.50

***NOTE:** The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face or synthetic masonry veneer, see wall ornamentation on next page.

EXTERIOR WALL (Continued)

Concrete or Masonry Walls	1	2	3	4
Rammed earth, soil cement, 24"	36.50	41.75	48.00	55.00
pneumatic build–up,				
formed one side	55.50	62.50	70.00	78.50
For each 6” variation in thickness,				
add or deduct	2.13	2.42	2.75	3.14
Tile, structural clay, 6”	30.50	34.75	39.25	44.75
10”	35.75	40.25	46.00	52.00

Concrete or Masonry Walls Extras

Add for stay in place forming	1.74	2.28	2.98	3.92
Add for glazed block or tile, each side	9.43	10.50	11.70	13.05
Add for pilasters	1.79	2.19	2.70	3.30
Add for bond beams	1.90	2.31	2.78	3.36
Add for seismic reinforcement	0.78	1.25	1.95	3.00
Add for synthetic plaster on				
rigid insulation (EIFS)	7.37	9.05	11.15	13.70
Deluxe, textured or aggregate	11.95	14.35	17.15	20.60
Add for thin masonry on				
rigid insulation	18.65	20.95	23.50	26.50
Add for clay tile back up in lieu				
of block	3.14	3.75	4.47	5.32
Add for earth sheltered waterproofing	1.44	2.19	3.29	4.93
Add for insulation	1.20	1.69	2.38	3.36
Earth sheltered structures	1.95	2.83	4.08	5.90

For special stonework, see Section UIP 6.

Curtain Walls

Brick or tile panels	38.25	46.50	55.50	67.00
Concrete and glass panels, precast	47.25	54.50	63.50	73.50
Glass fiber reinforced, molded	40.50	50.50	62.50	77.50
Metal and glass panels (ordinary)	52.00	61.50	73.00	86.00
Stainless steel or bronze and glass	76.00	87.50	103.00	120.00
Stone panels, local stone	68.00	74.50	82.00	91.50
Granite	74.50	84.50	97.00	110.00
Limestone or slate	70.00	77.50	84.50	94.50
Marble	70.50	80.50	93.00	106.00
Composite or aggregate panels	48.50	61.00	75.00	94.50
Structural glazed atrium				
including supports	120.00	159.00	212.00	289.00
Steel studs and stucco	27.50	32.50	38.25	45.75
Synthetic plaster on rigid				
insulation (EIFS)	32.25	39.00	46.75	56.00
Deluxe, textured or aggregate	37.50	45.00	53.00	63.50
Wood or aggregate board siding	28.00	34.75	42.75	53.00
Add for insulation, insulated area only	1.52	2.22	3.26	4.76

Pre-engineered Walls

Sand. pan., alum. or steel, 2 sides	31.25	35.75	41.00	47.25
Cement fiber or shotcrete, two sides	23.45	28.25	33.75	40.50
Fiberglass panels, two sides	30.75	36.25	42.75	50.50
Glass exterior, metal interior	34.50	39.75	46.00	53.00
Add for stainless steel or				
textured (Galbestos)	4.80	5.69	6.76	8.04
Add for polylaminated (FRP) interior	1.37	1.66	2.05	2.50
Deduct for gypsum or hardboard inter.	2.14	2.33	2.53	2.74
Prefabricated building panels,				
Aluminum or steel and glass panels	42.00	46.50	50.50	55.00
Add for porcelain enamel finish	4.27	5.05	5.95	7.03
add for block backup	8.43	9.56	10.85	12.25
Stucco on steel panel	47.25	52.00	58.00	63.50
Veneer, block or brick, on stl. pan.	54.00	61.00	68.50	77.50
Stone, rubble or rustic	68.00	73.50	80.50	87.50

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)
Single-wall Construction

	1	2	3	4
Aluminum or steel, on steel frame	11.80	14.25	17.30	20.85
On wood frame	10.70	13.00	15.85	19.30
Add for porcelain enamel finish	4.27	5.05	5.95	7.03
Add for stainless steel or textured (Galbestos)	4.80	5.69	6.76	8.04
Cement fiber (Transite),				
On steel frame	12.25	14.65	17.45	20.70
Sheet siding on wood frame	11.15	13.35	16.00	19.15
Siding or shingles on wood frame	12.05	14.25	16.85	19.90
Fiberglass light panels,				
On steel frame	9.22	10.50	11.95	13.55
Sandwich panels	11.25	12.25	13.35	14.55
Heavy, FRP, over 8 oz.	13.95	16.50	19.35	22.75
Light panels, on wood frame	8.12	9.22	10.50	11.95
Sandwich panels	10.05	10.90	11.85	12.90
Heavy, FRP, over 8 oz.	12.75	15.15	17.95	21.15
Glass panels	35.25	45.00	56.50	72.00
Projected greenhouse	73.00	82.00	91.50	102.00
Log, up to 10” diameter	29.00	37.50	49.00	63.50
Deluxe, hand–hewn or oversized	43.00	53.00	65.00	80.50
Plywood, boards or siding,				
On steel frame	11.85	14.15	17.00	20.20
On wood frame	10.40	12.45	15.00	17.90
Stucco on baled straw	23.85	28.75	34.50	41.25
Stucco on wood frame	12.05	13.95	16.20	18.70
Syn. plaster on rigid insul., (EIFS) on steel frame	17.55	20.50	24.00	28.00
Wood shingles on wood frame	12.15	14.15	16.40	19.20
Add for exterior sheathing, per layer	1.80	2.05	2.33	2.65
Add for interior sheathing or liner, finished	3.08	3.64	4.27	5.05
Polylaminated panel (FRP)	4.18	4.92	5.76	6.76
Add for stud wall backing	1.13	1.37	1.64	1.96
Add for insulation	1.09	1.33	1.58	1.90
Vinyl faced, exposed	1.46	1.61	1.78	1.96
Rigid board, faced	1.84	2.40	3.14	4.08
Add for air infiltration wrap	0.31	0.38	0.49	0.62

Wood or Steel Stud Walls

Aluminum or steel siding, horizontal	25.25	29.50	34.25	39.75
Sheet panels	22.75	26.75	31.50	37.25
Asphalt siding	22.05	25.50	29.50	34.00
Cement fiber siding or shingles,				
Horizontal	24.60	28.75	33.50	39.00
Sheet, embossed	23.00	26.50	30.75	35.25
Hardboard, siding or shingles,				
Horizontal	23.70	27.50	31.75	36.75
Sheet, embossed	22.60	26.00	30.00	34.75
Plywood, textured	22.45	26.00	30.00	34.50
Deluxe, redwood, cedar, etc.	25.00	29.00	33.50	38.75
Shingles or shakes, wood	25.50	29.75	34.75	40.50
Stucco	25.00	29.25	34.00	39.75
Synthetic plaster on rigid insulation (EIFS)	29.50	34.50	40.25	47.25
Deluxe, textured or aggregate	34.50	40.50	47.50	55.00
Vinyl siding or shingles	25.00	29.25	33.75	39.50
Wood siding	23.35	27.00	31.25	36.25
Deluxe, redwood, cedar, etc.	26.75	31.25	36.50	42.75
Log veneer siding	29.50	35.75	43.00	52.50
Deluxe, half round, full corners	41.25	46.75	52.50	59.50
Veneer, face block or concrete brick	31.00	35.75	41.25	48.00
Common brick	31.50	36.75	42.75	49.75
Face brick	36.00	41.50	48.25	55.00
Mortarless brick	36.25	41.25	47.50	54.00
Stone, ashlar veneer	55.00	64.00	74.50	86.00
Rubble or rustic	45.00	52.50	61.00	71.50
Synthetic veneer or panel	32.75	39.50	48.00	58.00
Thin veneer on rigid insulation	38.25	44.50	51.00	59.50

Wood or Steel Stud Walls (Continued)

	1	2	3	4
Add for sheathing	1.47	1.80	2.17	2.64
Add for seismic/wind bracing	0.78	0.94	1.15	1.40
Add for insulation	1.05	1.25	1.52	1.84
Add for air infiltration wrap	0.34	0.43	0.55	0.69
Add for air space wrap	1.03	1.16	1.33	1.49
Add for double–stud walls	2.30	2.73	3.26	3.89
Add for wood stresskin sandwich panels	6.76	7.99	9.40	11.05

EXTERIOR, BASEMENT AND TOWER STAIRS – Per riser.

Concrete	281.00	386.00	540.00	745.00
Steel pans or prefab. concrete on steel	311.00	415.00	565.00	765.00
Steel or aluminum grating	364.00	476.00	620.00	820.00
Wood	108.00	171.00	252.00	384.00

For fire escapes, see Section UIP 5.

BASEMENT WALLS – Apply to basement wall area.

Basement Walls

Concrete block, reinforced, 6”	16.50	18.50	20.85	23.55
8”	18.40	20.75	23.45	26.50
12”	22.75	25.75	29.00	32.75
For each additional 4” of block, add	4.38	4.86	5.41	6.00
Concrete, reinforced, 6”	19.60	22.15	25.00	28.25
8”	22.15	24.90	28.00	31.50
12”	27.00	30.25	33.75	38.00
16”	32.00	35.75	40.25	45.00
For each additional 4” of concrete, add	4.96	5.44	5.95	6.51
Masonry, brick, 8”	27.50	30.75	34.75	39.00
Stone, 12”	39.00	45.25	52.50	60.50
For each 4” variation in thickness, add or deduct	8.43	9.31	10.30	11.40
Wood, treated	15.35	18.70	22.80	28.00
Add for stay in place forming	1.02	1.49	2.15	3.14
Add for waterproofing	1.53	1.90	2.37	2.93
Earth sheltered structures	1.90	2.80	4.10	6.06
Add for insulation	1.16	1.65	2.36	3.34
Earth sheltered structures	1.84	2.70	3.96	5.83

For specific earth sheltered waterproofing, see Section UIP 1.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face,				
Roman or Norman	16.65	19.25	22.25	25.75
Face, standard size	18.20	21.05	24.60	28.50
Mortarless brick	19.15	21.95	25.25	29.00
Select common	16.20	18.70	21.75	25.25
Used	17.70	20.35	23.45	27.00
Simulated veneer or panel, 1/4" – 3/8"	14.70	17.90	21.75	26.25
Thin veneer on rigid insulation	18.70	21.05	23.65	26.75
Add for pictorial carved artwork	236.00	265.00	303.00	349.00
Cement fiber siding	5.14	6.32	7.73	9.47
Concrete, ornamental cast stone	37.25	45.00	53.50	64.00
Concrete block, imitation flagstone	14.70	17.25	20.10	23.55
Solar screen	15.90	18.65	21.95	25.75
Ornamental face, slump, fluted, Split or ground	15.85	18.25	21.00	24.30
Glazed one side, add	9.47	10.60	11.85	13.25
Cut stone, carved	150.00	220.00	326.00	485.00
Glass block, white or aqua	59.50	65.50	72.50	80.50
Colors or solar reflective	82.00	90.00	98.50	108.00
Granite, ashlar or panel	77.50	90.00	103.00	120.00
Limestone, ashlar or panel	56.50	66.50	77.50	91.50
Local stone, ashlar veneer or panel	49.00	57.50	67.00	79.00
Rubble or rustic	36.50	43.50	52.50	62.50
Imitation precast stone	17.25	22.25	29.00	37.50
Marble, panels	63.50	74.50	86.00	102.00
Metal panels, screens, louvers	27.50	36.00	47.25	61.50
Preformed wall panels	5.41	9.72	16.20	25.75
Add for curved panels	1.55	2.17	3.05	4.27
Ornamental doorways	105.00	205.00	349.00	560.00
Slate, panels	52.50	61.00	70.50	82.00
Stucco	6.00	6.72	7.53	8.43
On masonry	4.80	5.45	6.19	7.03
Add for synthetic on rigid insulation, (EIFS)	3.86	4.92	6.25	7.97
*Built–up (EIFS) panel relief	8.18	10.45	13.30	17.10
Terra Cotta	43.50	51.50	61.00	72.00
Tile, ceramic	21.15	24.25	27.75	31.75
*Mosaics	31.25	38.00	46.50	56.00
Hand painted tiles	174.00	243.00	342.00	469.00
*Note - For pictorial artwork, add	16.80	23.35	32.75	46.00
Vinyl siding	5.14	6.14	7.34	8.74
Vitrolite (structural glass)	35.00	41.00	48.25	56.00
Wood, plywood	4.01	5.05	6.35	7.99
Shingles	5.58	6.61	7.84	9.28
Siding	4.96	6.18	7.67	9.52
Ornamented molding or trim	14.55	20.45	28.75	40.50
Add for treated wood	0.75	0.90	1.10	1.36

STAINED GLASS – Apply to art glass in window, dome or skylight area. These costs vary greatly, and the following typical cost ranges should be used with caution. See Section UIP 6 for complete description and detailed costs. For residential straight seams or simple bevel, deduct 50% from the Low Cost. For ceiling domes, use low-cost range for plastic, average for stock glass and high-cost for custom stained glass.

	1	2	3	4
Low cost, plain, min. work or detailed bevel etched	106.00	146.00	197.00	273.00
Average, simple figures and scenes	342.00	454.00	615.00	825.00
High cost, highly detailed work (including domes)	735.00	1020.00	1410.00	1940.00

MISCELLANEOUS – Apply to total square feet of lined area if required.

Secure compartmentalization, layered drywall	8.27	9.44	10.75	12.25
Metal shielding, radio frequency	35.25	48.00	65.00	87.50
Radiation protection	19.75	25.00	32.00	40.50
Ballistic shielding, fiberglass panels	32.75	47.50	69.00	100.00
Cold storage	2.65	3.54	4.69	6.25
For each inch over 2", add	0.46	0.65	0.96	1.38

EXTERIOR BALCONIES – Apply to balcony area.

Concrete	29.50	38.25	49.75	64.00
Steel	27.75	38.00	51.00	70.00
Wood	23.60	31.50	42.00	56.00
Add for ornate finishes, balustrades	25.75	31.75	39.00	48.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

ROOF STRUCTURE – Apply to roof area.

	1	2	3	4
Concrete joists, slab	16.95	19.30	22.00	25.25
Lift slab	15.15	17.15	19.55	22.05
Pan or waffle slab and joists	15.70	17.80	20.20	22.75
Precast joists and deck	14.85	16.80	19.10	21.60
Precast joists, wood deck	11.70	13.25	15.00	16.95
Cored plank on bearing walls	13.05	14.85	16.80	19.05
Thin shell	25.75	30.75	37.00	44.25
Concrete dome, cast in place	54.50	60.00	66.50	73.50
Thin shell	36.00	40.75	46.00	52.00
Fabric roof, air supported	57.00	61.50	67.50	73.50
Tension supported	65.00	73.00	80.00	91.00
Add for thermal liner	5.58	6.79	8.27	10.05
Steel joists, concrete slab	19.85	22.80	26.25	30.00
Gypsum on formboard	10.30	12.95	16.40	20.70
Precast deck	17.30	19.70	22.50	25.75
Steel deck	11.05	14.10	18.10	23.10
Light–gauge truss joists	9.05	11.70	15.15	19.55
Steel deck, gypsum or concrete	14.10	17.60	21.95	27.50
Wood or composition deck	9.05	11.60	14.90	19.05
Light–gauge truss joists	7.69	9.99	12.95	16.85
Open steel system for corrugated metal	4.49	6.61	9.72	14.25
Light purlin supports only	2.14	2.76	3.59	4.65
Steel space frame and sheathing three dimensional	33.50	43.00	55.50	70.00
Architectural exclusive of glazing	50.50	78.50	118.00	180.00
Metal dome and cover	43.50	50.00	58.00	67.00
Glazed or translucent panels	100.00	121.00	148.00	180.00
Wood joists, wood or composition deck	7.05	9.21	12.05	15.70
Exposed rafters, 2” T&G sheathing	10.25	12.90	16.15	20.30
Prefab. panels (exclusive of girders)	2.80	3.46	4.26	5.25
Stresskin sandwich panels (exclusive of purlins)	10.15	13.00	16.55	21.30
Add for snow roof, furred sheathing layer	2.85	3.17	3.51	3.90
Open wood system for corrugated metal	2.54	4.53	7.54	12.00
Light purlin supports only for metal, wood or fiberglass	1.16	1.52	2.04	2.70
Wood dome and deck	29.50	36.25	44.50	54.00
Add for seismic/hurricane truss ties	0.53	0.63	0.78	0.94
Add for monitor roof	60%	50%	40%	40%
Add for sawtooth roof	40%	35%	35%	25%
Add for complex roof, turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER – Apply to roof area.

	1	2	3	4
Aluminum or steel, corr., crimped or tile panels, preformed, light, to 26 gauge	3.09	3.95	5.04	6.44
Heavy, under 26 gauge	6.44	7.23	8.13	9.15
Formed seam, flat or standing	8.18	10.00	12.20	14.95
Batten seam	9.55	11.55	14.05	17.10
Sandwich panels, pre–engineered	13.10	16.30	20.20	25.00
Shingles	6.25	7.43	8.78	10.45
Aggregate finish	8.04	9.61	11.50	13.70
Thatch	26.25	28.25	30.75	33.50
Add for interior metal liner	2.74	3.17	3.64	4.18
Plastic	2.50	2.90	3.36	3.86
Add for porcelain enamel finish	4.27	5.05	5.95	7.03
Add for stainless steel or Textured (Galbestos)	4.80	5.69	6.76	8.04
Asphalt, corrugated	2.52	2.89	3.31	3.76
Atrium skylight, frame and glazing	51.50	68.00	90.00	117.00
Built–up composition	2.98	3.68	4.57	5.67
Cement fiber, shingles	6.51	7.93	9.64	11.70
Corrugated or sheet (Transite)	6.00	8.24	11.35	15.70
Composition, roll, mineral surface	1.58	1.87	2.21	2.62
Composition shingles, light, to 235 lb.	2.64	2.95	3.30	3.68
Heavy, over 235 lb. or laminated	3.58	4.42	5.48	6.79
Copper, flat or standing seam	17.10	19.75	22.85	26.50
Batten seam	18.35	21.15	24.60	28.50
Shingles	16.95	18.10	19.45	20.85
Elastomeric or modified bitumen, single ply	5.05	6.56	8.49	11.00
Reinforced sheet or spray fluid coat	8.66	9.99	11.50	13.25
Fiberglass, corrugated or sheet, light	3.09	3.58	4.14	4.80
Sandwich panels	5.22	5.88	6.62	7.45
Heavy, FRP, over 8 oz.	6.25	7.68	9.41	11.55
Slate	11.95	14.05	16.65	19.45
Red	22.75	27.00	32.00	38.00
Composite, reinforced fiber	8.66	10.20	12.05	14.20
Terne, flat or standing seam	16.50	18.95	21.90	25.25
Batten seam	17.90	20.55	23.65	27.25
Tile, clay	11.00	13.75	17.25	21.50
Concrete	7.79	8.99	10.40	11.95
Plastic or rubber	6.76	7.78	8.94	10.25
Add for custom coloring or glazing	1.89	2.40	3.05	3.86
Wood, shakes	5.46	6.22	7.10	8.09
Shingles	4.96	5.75	6.67	7.71
Fiber shingles	3.52	4.13	4.88	5.73
Add for fire–resistant finish	0.77	0.93	1.13	1.40
Add for roof insulation	1.38	2.17	3.36	5.11
Earth sheltered structures	2.28	3.51	5.32	8.04
Add for earth sheltered waterproofing	2.05	3.01	4.41	6.47

NOTE: For underroof insulation and supporting structures, see Ceiling Extras on Page 2. For specific earth-sheltered waterproofing, see Section UIP 1. For earthen roof cover, see Fill costs on Page 1. See Section UIP 13 for top dressing, sod and/or sprinklers.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

OFFICES, BANKS AND HOSPITALS

SECTION SEG 5
(SEGREGATED COST METHOD)

Square foot of horizontal roofed area.

Rise	:	Run	Multiplier	Rise	:	Run	Multiplier
6'	:	12'	1.12	12'	:	12'	1.42
8'	:	12'	1.20	18'	:	12'	1.80

TRUSSES AND GIRDERS – Apply to area supported.

	1	2	3	4
Steel trusses or longspan girders	3.89	4.91	6.20	7.84
Timber trusses	4.32	5.45	6.88	8.66
Glued, laminated trusses or girders	3.96	4.95	6.19	7.73

CANOPIES OR MARQUEES – Apply to horizontal area. For light false-mansard structures, deduct 50% to 60%. For greater detail, see Section UIP 4 or 6.

Wood frame	36.50	45.75	56.00	70.00
Steel frame	44.50	56.00	71.00	90.00

CUPOLA STRUCTURES, CLOCKS, etc. – See Section UIP 4. For clock or bell towers, see notes in Section SEG 6.

ELEVATORS – Apply against area served if detailed costs from Section UIP 7 are not used.

Banks, branch,				
Classes A and B	5.51	8.01	11.60	-----
Classes C, D and S	-----	3.45	5.67	9.42
Central office, Classes A and B	-----	7.85	11.45	16.75
Classes C, D and S	-----	3.15	5.15	8.54
Convalescent hospitals,				
Classes A and B	-----	5.51	7.85	-----
Governmental buildings,				
Classes A and B	-----	8.06	11.60	16.75
Hospitals (incl. dumbwaiters),				
Classes A and B	5.51	8.09	11.85	17.55
Classes C, D and S	-----	3.57	5.63	8.93
Medical office buildings,				
Classes A and B	5.39	7.86	11.45	16.75
Classes C, D and S	-----	3.23	5.28	8.61
Office buildings,				
Classes A and B	5.28	7.73	11.30	16.60
Classes C, D and S	-----	3.03	5.03	8.36
Public libraries,				
Classes A and B	-----	3.15	5.39	-----
Veterinary hospitals,				
Classes A and B	-----	5.58	-----	-----

NUMBER OF STORIES MULTIPLIER

To allow for the cost of hoisting materials, increased labor costs, and miscellaneous costs due to high-rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% for each story over three.

Example: Twenty-three story building: Multiplier = 1.050

ATRIUM HVAC

To price the heating and cooling of large atrium areas, simply refine the appropriate square foot system cost to be applied to the ground floor area by 100% plus 3% for each foot over the 12-foot average story height adjustment found on Page 4.

Example: Multistory building, atrium height of 52': Multiplier = 2.20

COMPLETION OF BUILDING VALUATION

Contractors' overhead and profit, sales taxes, permit fees, and insurance during construction are included in the above costs. Interest on interim construction financing is also included, but not financing costs, real estate taxes, or brokers' commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multiplier which bring the base costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

Theaters, auditoriums, bowling alleys and other large recreational buildings are characterized by their large capacity for seating, wide clear spans, high ceilings and relatively few partitions. If any of these buildings is part of a building designed for other purposes, price the church, theater, auditorium, etc., from this section, and the balance of the building from the appropriate section. However, ancillary offices, projection rooms or booths, etc., which are normal to the uses included in this section, are included in the interior construction costs. For descriptions of buildings included in this section, see the Calculator Section.

Foundations for Class A and B auditorium type structures can be priced quite accurately on a square foot of floor area basis. However, with light Class C, D and S buildings, a perimeter foundation or footings may carry most or all of the load, and the cost is generally proportional to the perimeter. Such costs may be better computed on the linear foot of bearing wall basis, with costs of column footings added if interior columns support a roof or floor load above.

Marquees, stepped balconies, galleries and mezzanines should be priced separately from the building shell. Stage costs are listed separately from the other interior costs.

Fixtures which are included in the Interior costs are those permanently attached as part of the real property, including projection rooms, asbestos curtains, fly galleries, etc. Not included are draperies, scenery, movable wings, seating, counters, kitchen/snack bar equipment or the alleys and pinsetters in a bowling alley. Prices of such items may be found in Section UIP 12.

Electrical costs include all house lights, outlets, fixtures and switchboards. Movable lights, spots, border lights and cables are considered equipment and are not included. The normal criteria, is whether the item is usually included as part of the general building contract.

Stained-glass windows are not included in the wall costs but should be priced in detail from Section UIP 6

SEGREGATED COSTS

(For explanation of the rating numbers see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation (per cu. ft.)	0.52	0.69	0.94	1.27
Seismic, dry moat (per cu. ft.)	0.83	1.00	1.24	1.52
Fill (per cu. ft. of compacted earth)	0.56	0.69	0.88	1.09
Site preparation (per sq. ft. of site)	0.46	0.57	0.72	0.93

FOUNDATION – Table I gives complete average costs per square foot of floor area. If a more detailed estimate is desired for Class C, D or S buildings with bearing walls, use Tables II and III as appropriate.

TABLE I. CONCRETE FOUNDATIONS – Apply to total floor area, including basements but excluding mezzanines or balconies.

Concrete foundations for:				
Class A	4.24	5.48	7.10	9.18
Class B	4.48	5.74	7.35	9.41
Class C, bearing wall	3.89	5.07	6.60	8.60
Nonbearing wall	3.72	4.84	6.31	8.20
Class D, masonry veneer	3.47	4.55	5.96	7.81
Siding or stucco	3.04	3.99	5.22	6.84
Pole frame construction	2.85	3.71	4.83	6.29
Class S	3.07	4.05	5.35	7.04
Class C, D and S light perimeter foundation for large open shell–type structures	1.19	1.54	1.99	2.60
Add for perimeter insulation, ground floor area only	0.15	0.27	0.40	0.62
Earth sheltered structures	0.22	0.38	0.59	0.91
Add for seismic, base isolators damping devices	2.86	3.85	5.17	6.95

TABLE II. ALTERNATE METHOD – Apply to linear feet of continuous footings or foundation walls if Table I is not used. See discussion above.

Heavy grade beam or stem footing				
Class C	51.00	69.00	93.50	127.00
Class D, masonry veneer	46.50	63.50	86.50	118.00
Siding or stucco	40.75	55.50	76.00	103.00
Class S	41.00	56.00	77.50	106.00
Light, reinforced grade beam, Classes C, D and S	31.25	43.75	60.50	84.50
Add for perimeter insulation	1.47	3.20	5.76	9.58
Earth sheltered structures	2.09	4.61	8.38	14.00
Add for perim. radon control matting	4.26	5.02	5.95	7.03
Add for perim. raised floor skirting	12.65	14.70	17.25	20.10

TABLE III. CONCRETE COLUMN FOOTINGS – Apply to total number of columns if Table I is not used. Costs apply to one-story buildings. For others, add 20% for each story over one.

	1	2	3	4
Concrete columns	91.50	159.00	259.00	411.00
Steel columns	84.50	149.00	248.00	391.00
Light pre–engineered frame	64.50	85.00	113.00	149.00
Light tubular/pipe frame	49.25	69.50	97.50	137.00
Wood columns	74.00	119.00	184.00	283.00
Light pole–frame	50.50	71.00	98.50	137.00
Piers, precast footing	18.95	30.00	46.00	70.50
Formed in place	64.00	76.50	91.50	109.00

FOUNDATION ADJUSTMENTS – Apply to base cost used.

Add 2% for each foot over 16' average story height. Deduct 2% for each foot under 16' average story height. For multistory buildings deduct .8% for each story over one, aboveground. For one story buildings with light perimeter-grade beam or foundations and footings formed and poured monolithically with floor slabs, use 60% of the above costs, for that floor only. Add for pilings from Section UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

FRAME – Apply to total floor area including framed basements, but excluding mezzanines.

Brg. walls, wd./stl floor sup. only	2.51	2.93	3.44	4.04
masonry supports only	3.62	4.27	5.00	5.91
Steel, fireproofed, Class A	27.00	33.00	40.25	48.75
Composite conc. steel, Class B	23.55	28.00	33.25	39.25
Concrete, reinforced, Class B	23.15	28.00	33.75	40.25
precast, post-tensioned	22.05	26.25	31.25	37.00
Steel, Classes C and D	9.47	11.90	14.90	18.70
Class S	8.95	11.25	14.15	17.70
Light pre–engineered frame	5.63	7.06	8.86	11.10
Light tubular/pipe frame	3.51	4.59	6.02	7.86
Add for fireproofing	1.36	2.17	3.39	5.20
Steel columns, wood beams	6.73	8.79	11.50	15.00
Wood, A–frame construction	7.70	9.32	11.30	13.75
Laminated bents and arches	8.76	10.55	12.70	15.25
Light arch rib construction	5.59	6.85	8.39	10.30
Mill–type (hvy timber) const.	9.06	11.00	13.30	16.05
Hvy timber/log construction, arch.	18.80	23.60	29.50	37.25
Post and beam construction	6.29	7.64	9.26	11.25
Light pole type construction	3.76	4.75	5.96	7.51
Add for seismic/wind bracing, Classes A and B	4.68	6.69	9.57	13.65
Open Classes C, D and S frames	1.24	1.53	1.92	2.39
dampening devices	1.89	2.49	3.29	4.33

FRAME ADJUSTMENTS – Apply to base cost used.

Add 4% for each foot of average story height over 16' base height. Deduct 4% for each foot of average story height under 16' base height. For multistory buildings, add 4% for each story over one to apply against the total floor area. For partially framed structures, see Section UIP 1.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

FLOOR STRUCTURE – Apply to area of described floor or mezzanine. For stepped balconies, see table below.

	1	2	3	4
Asphalt on ground, including base	8.55	5.04	6.01	7.18
Concrete: on ground excluding vapor barrier	7.18	10.35	5.97	8.62
Stepped incline	7.83	13.10	11.05	9.30
Lift slab	18.80	21.25	24.20	16.65
Elevated flat slab and joists	18.75	21.25	27.50	24.35
Pan or waffle slab and joists	22.05	17.20	24.95	19.45
Precast joists and deck	20.90	16.35	23.70	18.50
Precast joists, wood sheathing	16.30	14.40	18.45	12.80
Cored plank on bearing walls	18.40	16.20	20.75	14.40
Steel joists: flat slab	23.85	20.60	27.50	31.75
Corrugated deck and concrete	20.30	24.35	17.10	29.00
Cellular deck and concrete	24.35	20.25	25.25	29.00
Precast deck	26.75	17.95	23.40	20.45
Wood sheathing	16.05	20.45	9.96	12.65
Light–gauge truss joists	14.50	11.45	18.45	9.01
Wood: joists and sheathing	8.59	10.95	17.85	14.00
Joists and bridging only	11.45	8.69	15.05	6.61

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS – Add to floor structure costs.

Vapor barrier	1.05	1.49	2.09	2.96
Each inch of slab on grade over 10”, add	0.69	0.81	0.93	1.08
Each inch of sheathing over 1”, add	1.92	2.15	2.42	2.73
Foamed concrete surfacing, 1½” to 2”	1.55	1.89	2.28	2.77
Acoustical floating slab, incl. pads, 3” to 5”	8.06	8.60	9.19	9.81
Floor insulation, add	1.06	1.33	1.64	2.05
Cold storage (ice rink)	2.25	2.83	3.54	4.45
For each inch over 2”, add	0.44	0.63	0.94	1.37

STAGES AND PERMANENT STAGE FIXTURES – Apply to stage area.

Live performance	82.00	97.00	116.00	137.00
Motion picture only	40.25	51.00	64.50	82.00
Speaker’s platform	24.30	30.75	39.00	49.25

STEPPED BALCONY STRUCTURES – Apply to horizontal area of balcony. Add for soffit finish, floor covering and electrical for complete balcony cost.

Wood	25.25	30.00	35.75	42.75
Concrete	34.25	39.75	46.00	53.50
Structural steel and concrete	38.75	45.00	52.00	60.00
Structural steel and wood	31.25	36.00	41.50	48.25
Add for stadium support structure	13.75	19.10	26.25	36.50

BALCONIES (INTERIOR CONSTRUCTION) – Apply to open balcony or mezzanine area. (Cost of miscellaneous items such as rail, stairs, etc.)

	4.57	5.44	6.47	7.69

CATWALKS – Apply to linear footage of walkway.

Catwalks, steel	146.00	168.00	196.00	228.00
Wood	61.50	72.50	86.00	101.00
Ladders, steel	23.15	30.75	41.00	54.00
Wood	20.40	27.25	36.25	48.25

MISCELLANEOUS – Apply to total square footage of surface area. These costs vary greatly, and the following typical cost ranges should be used with caution. Built-in equipment which is normally included under the general contract is included in the interior construction costs.

Swimming pools, recreational	75.00	101.00	136.00	183.00
Competition, Olympic size	159.00	197.00	243.00	296.00
Ice skating rinks, complete incl. refrigeration	61.00	68.00	76.00	84.50

FLOOR COVER – Apply to area of described floor.

	1	2	3	4
Access (computer) floor, on stanchions	28.25	33.50	39.75	47.25
Asphalt tile	3.27	3.82	4.46	5.22
Bamboo, laminated plank	15.75	18.95	22.60	27.00
Brick pavers, in concrete	15.25	18.20	21.80	26.00
Carpet and pad	4.08	6.54	10.20	15.60
Custom carpet and pad	14.30	24.00	38.25	60.00
Indoor/outdoor	2.99	3.99	5.33	7.13
Color, concrete	1.52	1.93	2.46	3.12
Cork	8.52	9.93	11.60	13.50
Diato, magnesite, etc.	11.05	12.85	14.95	17.40
Flagstone, random local stone, In concrete	20.40	24.30	29.00	34.25
Hardener and sealer, concrete	1.27	1.72	2.36	3.21
heavy duty	2.89	3.55	4.39	5.41
Aggregate topping, 1/2” to 1”	7.78	10.20	13.45	17.70
*Hardwood	12.55	16.35	21.45	28.00
Sports gym floors on resilient sleepers	14.00	17.25	21.30	26.25
Leather	61.50	69.00	77.50	87.00
Linoleum	5.39	6.54	7.91	9.58
Marble or granite	38.00	52.50	73.50	102.00
Cast tile	22.55	26.50	31.50	36.75
Melamine laminated tile or sheet	4.89	6.64	8.97	12.15
Deluxe	11.10	13.10	15.40	18.10
Plastic tile, interlocking	10.45	11.75	13.15	14.70
Rubber fabric tile	14.50	16.85	19.75	23.00
Rubber tile or sheet	6.36	8.72	11.95	16.45
Seamless plastic, epoxy, urethane, neoprene, 1/32” - 1/16” thincoat	5.80	7.25	9.02	11.25
1/8” - 3/8”	9.49	11.85	14.80	18.55
Add for colored chips or glitter	2.61	3.21	3.93	4.82
Slate, grouted	22.85	27.25	32.25	38.25
Softwood	9.46	11.40	13.70	16.50
Stone Plank	24.45	29.00	34.00	39.75
Synthetic sports surfacing	11.50	14.25	17.70	21.90
Terrazzo (exclusive of base slab)	16.45	20.25	25.00	31.00
Tile	30.25	34.50	39.50	45.25
Tile, ceramic or quarry	16.45	20.70	26.25	33.00
Custom tile	37.25	44.50	54.00	65.00
*Wood over concrete, hardwood	14.40	18.55	23.85	30.75
Parquet block, prefinished, In mastic	14.70	20.20	27.75	38.00
Softwood	10.85	12.95	15.40	18.45
Vinyl composition tile or sheet	3.09	4.04	5.26	6.87
Vinyl sheet	5.22	7.17	9.84	13.50
Vinyl tile	5.55	8.07	11.75	17.10
*Add for custom wood floors	9.56	19.35	34.00	56.00
For pictorial artwork, add	14.95	21.05	29.75	41.50

For pool decking, see Section UIP 16.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

CEILING – Apply to area of described ceiling. To convert costs to floor area for high-pitched ceilings, use the roof slope multipliers on Page 8.

	1	2	3	4
Acoustical ceilings, tile or panels:				
Metal panels, incl. pads and suspension system	10.70	13.35	16.65	20.70
Mineral fiber, fiberglass, panels only	2.56	3.59	5.02	7.06
Organic fiber, wood or cane, panels only2.11	3.05	3.55	4.14	4.83
Embossed metal	9.18	12.30	16.50	22.15
Fiber sports court panel with suspension system	8.69	10.60	12.85	15.60
Gypsum board, taped and painted	3.02	3.36	3.73	4.13
spray on texture	2.93	3.20	3.46	3.77
Mirror faced panels	29.25	32.25	36.00	39.75
Paint or stain, bottom of roof or floor	1.05	1.36	1.75	2.27
Plaster on lath: acoustical	6.22	6.95	7.78	8.69
Spray on, thincoat with texture on lath or drywall	4.49	4.94	5.42	5.97
Standard, add 20% for Keene's	5.39	6.10	6.90	7.78
Add for metal lath	0.72	0.87	1.05	1.25
Plaster on masonry soffit: acoustical	5.32	5.95	6.66	7.43
spray on, thincoat with texture	3.51	3.86	4.24	4.64
Standard, add 24% for Keene's	4.49	5.04	5.69	6.36
Plaster panels, decorative, panels only	19.95	22.10	24.45	27.00
Plastic panels, with suspension system, but excluding lighting	10.30	12.25	14.60	17.40
Plywood (softwood) or hardboard panels	4.76	5.51	6.37	7.37
Hardwood	6.84	8.24	9.94	11.95
Coffered or vaulted panel with molding	14.90	20.20	27.50	37.25
Custom woods, site–built	37.00	43.25	51.00	60.00
Polylaminated panels (FRP)	4.82	5.39	6.06	6.79
Insulated panels	6.95	7.94	9.08	10.35
Wood, boards or T & G, softwood	4.50	5.31	6.25	7.37
Hardwood	7.37	8.65	10.20	11.95
Carved, decorative	14.20	20.20	28.75	40.75

CEILING EXTRAS – Add to ceiling costs. For special ornamentation, see Section UIP 2.

Ceramic tile, add	20.40	26.00	33.25	42.00
Custom tile, decorative	41.50	51.00	62.00	76.00
Custom papers, stenciling, staff, add	19.95	27.25	37.25	50.50
Border or coving only	4.96	6.38	8.16	10.45
Extensive decor., custom plaster, Terra cotta, add	56.00	71.00	90.50	116.00
Wood furring	1.43	1.76	2.17	2.65
Metal furring	2.20	2.80	3.55	4.52
If ceiling structure is required which is not part of the roof or floor structure, add	2.27	2.86	3.61	4.57
Suspended ceiling, metal suspension sys., add	2.06	2.62	3.36	4.27
Fiberglass, FRP	3.42	4.05	4.83	5.76
Hardwood, decorative	5.59	7.70	10.55	14.50
For seismic supports, add	0.37	0.47	0.62	0.81
Ceiling insulation, add	1.06	1.36	1.72	2.18
Vinyl faced, exposed	1.47	1.74	2.02	2.37
Add for underdeck supporting bands	0.49	0.57	0.68	0.81
Rigid board, faced	2.08	2.78	3.70	4.92

For ceiling domes, see stained glass, Page 7.

INTERIOR CONSTRUCTION – Apply to total floor area. Costs do not include seating, organs, pulpits or interior equipment, or other decoration which is not normally included in the general contract. See Section UIP 12 for theater and bowling equipment costs, etc. Icemaking equipment and bleachers can be found in Section UIP 14. See Section UIP 2 for special interior decorating. Add for pools from Section UIP 13.

Add or deduct 5% for each foot of variation from 16' average story height.

FRAME INTERIOR PARTITIONS:	1	2	3	4
Arcade buildings	8.04	11.00	15.05	20.55
Auditoriums	25.25	33.50	44.25	58.50
Bowling centers (excluding alleys and equip.)	6.48	9.44	13.80	20.10
Casinos	30.00	39.75	53.00	70.50
Churches, with Sunday School	30.25	38.75	49.25	63.00
Without Sunday School	35.50	46.00	59.50	77.50
Educational wings	29.25	35.25	42.75	51.50
Fellowship halls	23.15	31.50	43.00	58.50
Foyers/narthexes	17.10	21.75	27.50	35.00
Community recreation centers (excl. pools/rinks)	37.25	46.50	57.50	71.50
Convention centers	38.00	44.25	51.00	59.00
Fitness centers (excluding pools)	11.65	18.70	29.25	45.00
Fraternal buildings	29.50	38.75	51.00	66.50
Handball–racquetball clubs	19.60	28.25	40.50	58.50
Indoor tennis clubs	5.61	7.82	10.90	15.15
Museums	33.50	43.50	56.50	73.00
Pavilions	1.89	2.81	4.21	6.29
Skating rinks, ice excluding icemaking equip.	14.50	22.70	35.00	53.00
Roller rink	10.55	15.75	23.50	35.25
Theaters, live stage presentation	22.85	33.00	48.00	69.00
Cinema	20.55	27.00	35.25	46.00
Visitor centers	18.70	25.50	34.75	47.25
Finished basements, churches	19.60	23.70	28.75	34.75
Theaters	16.60	19.75	23.65	28.25

MASONRY INTERIOR PARTITIONS:				
Arcade buildings	9.25	12.40	16.65	22.30
Auditoriums	27.25	35.75	46.75	61.00
Bowling centers excluding alleys and equip.	7.57	10.75	15.30	21.90
Casinos	32.00	42.25	56.00	73.50
Churches, with Sunday School	32.25	41.00	52.00	65.50
Without Sunday School	37.50	48.25	61.50	79.00
Educational wings	31.25	37.50	45.00	54.00
Fellowship halls	25.00	33.75	45.25	61.00
Foyers/narthexes	18.70	23.50	29.50	37.25
Community recreation centers (excl. pools/rinks)	39.50	48.50	60.00	73.50
Convention centers	40.25	46.50	53.50	61.50
Fitness centers (excluding pools)	13.20	20.40	31.25	47.25
Fraternal buildings	31.50	41.00	53.00	69.00
Handball racquetball clubs	21.45	30.25	43.00	61.00
Indoor tennis clubs	6.60	9.02	12.35	16.85
Museums	35.75	45.75	58.50	75.00
Pavilions	2.36	3.45	5.04	7.40
Skating rinks, ice excluding icemaking equipment	16.15	24.45	36.75	55.50
Roller rink	12.10	17.55	25.50	37.25
Theaters, live stage presentation	24.75	35.50	50.50	72.00
Cinema	22.30	29.00	37.25	48.00
Visitor centers	20.40	27.50	36.75	49.25
Finished basements, churches	21.60	25.75	30.75	36.75
Theaters	18.40	21.75	25.50	30.25

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

PLUMBING – Apply to total floor area or use Section UIP 3 for cost per fixture. Balcony plumbing is included in the building costs. The following costs represent typical ranges only.

	1	2	3	4
Arcade buildings	2.76	5.76	10.20	16.85
Auditoriums	5.70	10.00	16.50	26.25
Bowling centers	3.36	4.15	5.16	6.38
Casinos	7.79	11.00	15.55	22.05
Churches, with Sunday School	5.78	10.30	17.10	27.25
Without Sunday School	4.63	8.38	14.00	22.30
Educational wings	5.35	7.41	10.25	14.15
Fellowship halls	3.99	6.41	9.97	15.30
Foyers/narthexes	10.45	15.30	22.30	32.75
Community recreation centers	7.71	10.60	14.60	20.10
Convention centers	6.35	8.72	12.00	16.60
Fitness centers	4.92	6.84	9.46	13.10
Fraternal buildings	5.72	9.41	15.05	23.35
Handball–racquetball clubs	4.91	6.36	8.21	10.60
Indoor tennis clubs	3.36	4.45	5.91	7.84
Museums	5.26	8.00	12.05	18.10
Pavilions	2.36	3.51	5.23	7.81
Skating rinks, ice	5.07	7.20	10.20	14.40
Roller rink	3.74	4.91	6.45	8.44
Theaters, live–stage presentation	9.74	12.75	16.70	21.90
Cinema	5.41	7.26	9.72	13.05
Visitor centers	9.89	12.90	16.80	21.90

ELECTRICAL AND LIGHTING – Apply to total floor area. Live stage presentation theaters and convention centers are listed by occupancy but are not included in the general tables.

Few Outlets:				
Nonmetallic	6.94	8.53	10.50	12.95
Armored cable (BX)	8.29	10.10	12.35	15.05
Flexible conduit	9.81	11.90	14.45	17.55
Rigid conduit	11.65	14.05	16.95	20.40
Average Number of Outlets:				
Nonmetallic	9.58	11.75	14.40	17.70
Armored cable (BX)	11.60	14.15	17.30	21.15
Flexible conduit	13.90	17.00	20.70	25.25
Rigid conduit	16.70	20.35	24.75	30.25
Many Outlets:				
Nonmetallic	13.20	16.20	19.80	24.30
Armored cable (BX)	16.15	19.75	24.15	29.75
Flexible conduit	19.60	24.10	29.50	36.25
Rigid conduit	24.00	29.50	36.25	44.50
Unfinished Areas:				
Nonmetallic	2.64	3.14	3.74	4.43
Armored cable (BX)	3.14	3.73	4.41	5.23
Flexible conduit	3.71	4.39	5.22	6.19
Rigid conduit	4.39	5.20	6.16	7.26

Typical costs for selected occupancies.

Arcade buildings	6.88	13.20	22.70	36.75
Auditoriums	8.62	16.20	27.50	44.50
Bowling centers	11.75	14.10	16.95	20.25
Casinos	19.95	29.25	42.25	61.50
Churches, with Sunday School	12.65	17.70	24.75	34.75
Without Sunday School	10.60	16.80	26.00	39.75
Educational wings	8.62	11.65	15.85	21.45
Fellowship halls	6.41	11.75	19.75	31.75
Foyers/narthexes	9.89	16.00	25.00	38.75
Community recreation centers	11.50	15.75	21.50	29.50
Convention centers	11.35	19.45	31.75	49.75
Fitness centers	7.88	11.25	16.05	22.85
Fraternal buildings	7.78	13.45	21.95	34.75
Handball/racquetball clubs	7.82	10.50	14.15	19.00
Indoor tennis clubs	6.97	9.52	13.05	17.85
Museums	16.70	24.60	36.25	53.00
Pavilions	9.00	13.35	19.90	29.50
Skating rinks, ice	8.69	12.55	18.05	26.00
Roller rinks	6.76	8.75	11.35	14.70
Theaters, live stage presentation	17.10	25.50	38.25	57.00
Cinema	14.10	19.15	26.00	35.50
Visitor centers	12.80	18.40	26.50	38.00

SPRINKLERS – Apply to sprinklered area. Costs include all piping and connections to main for light-hazard occupancies but do not include tanks. For double sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost.

	1	2	3	4
3,000 square feet	5.16	6.59	8.38	10.70
5,000	4.79	6.06	7.66	9.66
10,000	4.32	5.39	6.76	8.44
15,000	4.02	5.02	6.31	7.88
20,000	3.86	4.80	6.00	7.45
30,000	3.61	4.49	5.58	6.94
40,000	3.46	4.29	5.30	6.56
60,000	3.27	4.01	4.92	6.06
80,000	3.12	3.83	4.69	5.75
100,000	3.01	3.68	4.49	5.50
125,000	2.93	3.57	4.33	5.27
150,000	2.81	3.42	4.15	5.07
200,000	2.71	3.29	3.98	4.82
250,000	2.61	3.15	3.83	4.63
300,000	2.55	3.06	3.70	4.45
400,000	2.43	2.93	3.52	4.24
500,000	2.37	2.83	3.39	4.04

HEATING, COOLING AND VENTILATION – Apply to total floor area.

Add or deduct 3% for each foot of variation from 16' average story height. For high-arched ceilings, as in churches, use wall height plus 1/2 the height from eaves to ridge to determine effective height.

For ice rink refrigeration, see Section UIP 14.

Costs are given for gas-fired heating surfaces. Add or deduct as follows for other fuels.

Oil fired +7% Coal, stoker +7% Coal, hand fired -2%

Heating Only				
Electric, cable or baseboard	5.32	7.06	9.34	12.40
Radiant panels	5.02	5.95	7.03	8.29
Electric wall heaters (including FWA)	2.53	3.08	3.74	4.54
Forced–air furnace	5.52	8.03	11.60	16.85
Hot water, baseboard or convectors	10.05	13.20	17.40	22.85
Radiant floor or ceiling	9.81	13.35	18.20	24.75
Radiant heat, gas, suspended	2.43	3.29	4.42	5.97
Space heaters, gas, with fan	1.97	2.73	3.77	5.20
Steam radiator, with boiler	9.33	12.15	15.90	20.70
Without boiler	7.71	10.35	13.90	18.70
Wall or floor furnace	2.64	3.29	4.05	5.02
Heating and Cooling				
Zoned A.C., hot and chilled water (zoned)	24.30	31.75	41.25	54.00
Warm and cooled air (zoned)	14.65	20.50	28.75	40.25
Package heating and cooling, short ducts	9.81	13.70	19.15	26.75
Heat pump system	10.85	15.75	22.90	33.50
Add for ground loop heat source	2.43	3.61	5.36	7.97
Individual thru wall heat pumps	4.54	6.11	8.21	11.05
Cooling Only				
Evaporative coolers	4.60	5.39	6.34	7.41
Refrigerated air conditioning only, Zoned system	8.85	11.40	14.70	19.00
Package unit, short ducts	6.54	8.28	10.50	13.25
Ventilation only, with ducts and blowers	1.84	2.43	3.21	4.24

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

EXTERIOR WALL – Apply to total wall area. Costs do not include stained glass. For tower costs, see Note on Page 7.

Concrete or Masonry Walls	1	2	3	4
Adobe or hollow clay block, 6”	31.50	35.00	38.50	43.00
8”	33.75	37.50	42.25	46.75
12”	38.25	42.50	47.25	52.50
14”	42.50	47.25	52.50	58.50
Adobe block, grouted or cavity				
22” - 24”	49.00	55.00	61.00	67.50
30” - 32”	52.50	58.50	65.50	73.00
Block, concrete, 6”	27.25	30.25	33.75	37.00
8”	29.50	32.75	36.00	40.00
12”	33.75	37.00	41.50	45.75
16”	37.75	42.25	46.50	51.50
For each additional 4” of block, add	4.08	4.51	4.96	5.46
Block, grouted or cavity, 10” - 12”	31.75	35.25	38.50	43.00
*Add for ornamented face block	2.06	3.06	4.54	6.76
Brick, block backup, 8”	35.50	39.25	43.50	48.25
12”	40.00	44.00	48.75	54.00
16”	43.50	48.25	53.50	59.50
Brick, common, 8”	40.00	44.00	48.75	54.00
12”	48.00	53.50	58.50	65.00
16”	56.00	61.50	68.50	75.50
For each additional 4” of brick, add	8.22	9.01	9.87	10.80
Brick, grouted or cavity, reinforced, 9” - 10”	43.25	48.00	53.50	58.50
Block backup, 9” - 10”	39.00	43.50	48.25	53.50
Block backup, 12” - 14”	43.25	48.00	53.50	59.00
Brick, 6” SCR modular	30.25	33.75	37.75	42.25
8”	33.50	37.00	41.00	45.75
*Add for face brick	4.51	4.94	5.42	5.94
Concrete, reinforced, formed, 4”	31.25	34.75	38.25	42.50
6”	33.25	36.75	41.00	45.50
8”	35.50	39.25	43.50	48.25
12”	40.25	44.75	49.25	55.00
For each additional 4” of concrete, add	4.74	5.16	5.61	6.10
Precast panels, 2”	25.50	28.50	31.50	35.25
4”	27.25	30.25	33.75	37.00
6”	30.00	33.25	36.75	40.75
8”	33.25	36.50	40.25	44.25
12”	39.00	43.00	46.75	51.50
Tilt–up panels, 4”	25.50	28.50	31.75	35.50
6”	27.50	30.75	34.50	38.25
8”	29.75	33.25	37.00	41.75
10”	32.00	36.00	40.25	45.00
12"	34.75	38.50	43.25	48.25
Add for insulated sandwich	2.41	2.98	3.69	4.58
Add for brick or tile inserts	8.69	10.80	13.45	16.65
Glass block, white or aqua	68.50	73.00	77.00	82.00
Colors or reflective	91.00	95.00	101.00	107.00
Local stone, block backup, Ashlar veneer, 12”	64.00	71.50	80.50	91.00
Rubble or rustic, veneer, 12”	51.00	58.50	67.50	77.00
For each 4’’ variation in thickness	4.08	4.51	4.96	5.46
Local fieldstone, in mortar, 12”	46.50	52.00	57.50	64.50
For each 4” variation in thickness	3.93	4.54	5.23	6.01
Local stone, rough cut, solid, 12”	66.50	80.50	98.00	119.00
Granite	70.50	88.50	112.00	141.00
Limestone	74.00	91.00	109.00	133.00
For each 6” variation in thickness	30.50	36.00	42.50	50.00
Rammed earth, soil cement, 24”	34.75	39.25	44.75	51.00
Pneumatic build–up, formed one side	53.50	59.00	66.50	73.50
For each 6” variation in thickness	1.93	2.25	2.61	3.03
Tile, structural clay, 6”	29.50	33.00	36.75	41.50
10”	34.50	38.25	43.00	47.50

EXTERIOR WALL (Continued)

Concrete or Masonry Wall Extras	1	2	3	4
Add for stay in place forming	1.67	2.19	2.85	3.73
Add for glazed block or tile, each side	9.09	10.20	11.40	12.80
Add for pilasters	1.73	2.09	2.54	3.07
Add for bond beams	1.82	2.18	2.59	3.10
Add for seismic reinforcement	0.74	1.20	1.87	2.90
Add for synthetic plaster on rigid insulation (EIFS)	7.15	8.79	10.85	13.35
Deluxe textured or aggregate	11.60	14.00	16.80	20.20
Add for thin masonry on rigid insulation	18.10	20.20	22.55	25.25
Add for clay tile backup in lieu of block	3.04	3.57	4.21	4.97
Add for earth sheltered waterproofing	1.34	2.08	3.16	4.81
Add for insulation	1.11	1.60	2.25	3.20
Earth sheltered structures	1.80	2.65	3.89	5.74

For special stonework, see Section UIP 6.

Buttresses – Apply to cubic foot of buttress wall area.

Concrete	35.50	39.50	44.25	49.25
Masonry	40.50	45.00	49.25	54.50
Local stone, ashlar veneer	75.00	83.00	93.00	103.00
Rubble or rustic veneer	56.00	63.50	72.00	82.00
Rough cut, solid, local stone	65.00	76.50	91.50	108.00
Granite	69.50	85.50	106.00	130.00
Limestone	69.00	82.50	98.50	119.00

Curtain Walls

Brick or tile panels	36.50	43.75	52.50	63.00
Concrete and glass panels, Precast	45.00	51.50	60.00	69.00
Glass fiber reinforced, molded	38.75	47.50	58.50	72.00
Metal and glass panels (ordinary)	49.25	58.50	69.00	82.00
Stainless steel or bronze and glass	72.50	83.00	96.00	111.00
Stone panels, local stone	65.50	72.00	79.00	87.00
Granite	72.00	81.00	92.00	105.00
Limestone or slate	68.00	74.50	82.00	90.00
Marble	66.50	76.50	87.50	100.00
Composite or aggregate panels	46.00	56.50	70.50	87.00
Structural glazed atrium including supports	114.00	152.00	203.00	274.00
Steel studs and stucco	26.25	31.00	36.50	43.00
synthetic plaster on rigid insulation (EIFS)	30.25	36.50	43.50	52.50
Deluxe textured or aggregate	35.50	42.00	50.00	59.50
Wood or aggregate board siding	26.75	32.75	40.25	49.25
Add for insulation to insulated area only	1.47	2.15	3.15	4.63

Pre-engineered Walls

Sandwich panels, alum. or steel, both sides	29.00	33.25	38.00	43.75
Cement fiber or shotcrete, two sides	22.15	26.50	31.75	38.00
Fiberglass panels, two sides	28.75	34.00	39.75	47.25
Glass exterior, metal interior	33.00	37.50	42.75	48.50
Add for stainless steel or textured (Galbestos)	4.64	5.52	6.60	7.85
Add for polylaminated (FRP) Interior	1.24	1.50	1.86	2.28
Deduct for gypsum or hardboard interior	2.05	2.22	2.42	2.61

***NOTE:** The additional cost on this page for ornamented face block or face brick is the difference between the cost of the face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented block veneer or face brick veneer, see Wall Ornamentation on Page 7.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

Single Wall Construction	1	2	3	4
Aluminum or steel, on steel frame	10.95	13.25	16.15	19.60
On wood frame	9.81	12.05	14.80	18.10
Add for porcelain enamel finish	4.08	4.86	5.79	6.87
Add for stainless steel or textured (Galbestos)	4.64	5.52	6.60	7.85
Cement fiber (transite),				
On steel frame	12.30	15.05	18.40	22.55
Sheet siding on wood frame	11.20	13.75	16.95	20.90
Siding or shingles on wood frame	12.10	14.70	17.95	21.90
Fiberglass, light panels,				
On steel frame	8.85	10.20	11.75	13.50
Sandwich panels	11.10	12.55	14.20	16.05
Heavy, (FRP), over 8 oz.	14.25	16.65	19.45	22.70
Light panels on wood frame	7.84	9.02	10.40	12.00
Sandwich panels	10.05	11.35	12.80	14.50
Heavy, (FRP), over 8 oz.	13.10	15.40	18.05	21.15
Glass panels	32.75	41.25	52.50	66.50
Projected greenhouse	69.00	77.50	87.00	97.00
Log, up to 10” diameter	27.00	35.25	45.75	59.50
Deluxe, hand hewn or oversized	40.25	49.75	61.50	76.00
Plywood, boards or siding,				
On steel frame	11.05	13.25	15.90	19.15
On wood frame	9.64	11.65	14.10	17.00
Stucco on baled straw	22.55	27.00	32.75	39.00
Stucco on wood frame	11.20	13.05	15.15	17.70
Syn. plaster on rigid insul. (EIFS),on steel frame	16.00	18.95	22.40	26.50
Wood shingles on wood frame	11.40	13.35	15.65	18.30
Add for exterior sheathing, per layer	1.68	1.93	2.22	2.53
Add for interior sheathing or liner, finished	2.95	3.48	4.10	4.83
Polylaminated panel (FRP)	3.99	4.74	5.66	6.72
Add for stud wall backing	1.08	1.31	1.58	1.92
Add for insulation	1.05	1.27	1.52	1.84
Vinyl faced, exposed	1.37	1.53	1.72	1.92
Rigid board faced	1.80	2.34	3.05	3.98
Add for air infiltration wrap	0.31	0.38	0.49	0.62

EXTERIOR WALL (Continued)

Wood or Steel Stud Walls	1	2	3	4
Aluminum or steel siding, horizontal	24.15	28.00	32.50	37.50
Sheet panels	21.90	25.50	30.00	35.25
Asphalt siding	21.15	24.30	28.00	32.25
Cement fiber siding or shingles, horizontal	23.65	27.50	32.00	36.75
Sheet, embossed	22.05	25.25	29.25	33.50
Hardboard siding or shingles, horizontal	22.85	26.25	30.25	34.75
Sheet, embossed	21.75	24.90	28.75	32.75
Plywood, textured	21.60	24.75	28.50	32.75
Deluxe, redwood, cedar, etc.	24.00	27.50	32.00	36.75
Shingles or shakes, wood	24.45	28.50	33.00	38.25
Stucco	24.00	28.00	32.50	37.50
Synthetic plaster on rigid insulation (EIFS)	28.25	32.75	38.25	44.50
Deluxe, textured or aggregate	33.25	38.75	45.00	52.50
Vinyl siding or shingles	24.00	28.00	32.50	37.50
Wood siding	22.45	26.00	29.75	34.25
Deluxe redwood, cedar, etc.	25.50	29.75	34.75	40.25
Log veneer siding	28.50	34.00	41.00	49.00
Deluxe, half round, full corners	39.75	45.00	50.50	56.50
Veneer, face block or concrete brick	29.75	34.25	39.50	45.25
Common brick	30.25	35.00	40.50	46.75
Face brick	34.75	39.75	45.75	52.50
Mortarless brick	34.75	39.50	45.25	51.50
Stone, ashlar veneer	53.00	61.50	71.00	82.00
Rubble or rustic	42.25	49.25	58.00	67.00
Synthetic veneer or panel	31.25	37.50	45.00	54.00
Thin veneer on rigid insulation	36.50	42.00	48.25	55.50
Add for sheathing	1.40	1.68	2.05	2.48
Add for seismic/wind bracing	0.75	0.91	1.10	1.37
Add for insulation	1.02	1.24	1.49	1.81
Add for air infiltration wrap	0.35	0.44	0.53	0.66
Add for air space wrap	1.00	1.12	1.27	1.41
Add for double–stud walls	2.24	2.65	3.15	3.77
Add for wood stresskin sandwich panel	6.72	7.84	9.15	10.70

MISCELLANEOUS – Apply to total square footage of lined area.

Cold storage, insulation board	2.77	3.68	4.88	6.48
for each inch over 2”, add	0.46	0.66	1.00	1.47

BASEMENT WALLS – Apply to basement wall area.

Concrete block, reinforced, 6”	15.70	17.95	20.50	23.50
8”	17.85	20.35	23.15	26.25
12”	21.90	24.80	28.25	32.00
For each additional 4” of block, add	4.26	4.64	5.07	5.55
Concrete, reinforced, 6”	19.00	21.65	24.70	28.25
8”	21.45	24.40	27.75	31.75
12”	26.25	29.75	33.50	38.00
16”	31.25	34.75	39.00	43.75
For each additional 4” of concrete, add	4.82	5.24	5.72	6.22
Masonry, brick, 8”	26.75	30.50	34.50	39.00
Stone, 12”	38.00	44.25	51.50	60.00
For each 4” in thickness	8.29	9.15	10.10	11.10
Wood, treated	14.50	18.05	22.45	28.00
Add for stay in place forming	0.99	1.44	2.12	3.12
Add for waterproofing	1.52	1.89	2.34	2.90
Earth sheltered structures	1.87	2.77	4.07	6.03
Add for insulation	1.10	1.59	2.31	3.34
Earth sheltered structures	1.81	2.67	3.93	5.83

For specific earth sheltered waterproofing, see Section UIP 1.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

WALL ORNAMENTATION – Apply to ornamented area.

	1	2	3	4
Brick, split face, Roman or Norman	16.15	18.50	21.15	24.15
Face, standard size	17.40	20.10	23.20	27.00
Mortarless	18.70	21.15	23.95	27.00
Select common	15.70	17.95	20.65	23.65
Used	17.10	19.50	22.25	25.50
Simulated veneer or panel, 1/4" - 3/8"	13.90	16.80	20.35	24.60
Thin veneer on rigid insulation	18.55	20.55	22.85	25.50
add for pictorial carved artwork	228.00	258.00	289.00	327.00
Cement fiber siding	4.64	5.52	6.60	7.85
Concrete, ornamental cast stone	36.50	43.00	51.00	60.00
Concrete block, imitation flagstone	14.30	16.50	19.10	22.05
Solar screen	15.30	17.85	20.70	24.15
Ornamented face, slump, fluted, Split or ground	15.25	17.45	20.05	23.00
Glazed one side, add	9.33	10.40	11.60	12.95
Cut stone, carved	144.00	208.00	301.00	433.00
Glass block, white or aqua	57.50	63.00	69.00	76.00
Colors or solar reflective	79.00	87.00	94.50	103.00
Granite, ashlar or panel	74.50	84.50	96.50	111.00
Limestone, ashlar or panel	55.00	63.50	73.50	84.50
Local stone, ashlar veneer or panel	48.00	55.50	64.00	74.50
Rubble or rustic	34.75	41.25	49.25	59.00
Imitation precast stone	16.45	21.00	26.75	34.25
Marble, panels	61.00	70.50	82.50	96.00
Metal panels, screens, louvers	26.50	34.25	43.75	56.50
Preformed wall panels	5.22	9.19	15.10	24.00
Add for curved panels	1.55	2.12	2.93	4.02
Ornamental doorways	100.00	190.00	324.00	525.00
Slate, panels	51.50	59.50	68.00	77.50
Stucco	5.73	6.41	7.16	8.00
On masonry	4.57	5.20	5.91	6.72
Add for synthetic on rigid Insulation (EIFS)	3.76	4.76	6.04	7.66
*Built–up (EIFS) panel relief	8.00	10.10	12.75	16.15
Terra cotta	41.25	48.50	57.50	68.00
Tile, ceramic	20.40	23.20	26.50	30.25
*Mosaics	30.50	36.50	43.75	52.50
Hand painted tiles	159.00	220.00	303.00	426.00
Vinyl siding	4.96	5.85	6.87	8.06
Vitrolite (structural glass)	33.75	39.00	45.25	52.50
Wood, plywood	3.93	4.86	6.01	7.44
Shingles	5.35	6.29	7.38	8.66
Siding	4.93	6.01	7.33	8.90
Ornamented molding or trim	14.00	19.65	27.75	39.00
Add for treated wood	0.72	0.87	1.06	1.29
*For pictorial artwork, add	16.05	22.40	31.50	43.75

STAINED GLASS – Apply to art glass for window, dome or skylight area. These costs vary greatly and the following typical cost ranges should be used with caution. See Section UIP 6 for complete description and detailed costs. For residential straight seams or simple bevel, deduct 50% from the Low Cost. For ceiling domes, use low-cost range for plastic, average for stock glass and high-cost for custom stained glass.

	1	2	3	4
Low cost, plain, min. work, detailed bevel etched	103.00	143.00	197.00	274.00
Average, simple figures and scenes	327.00	448.00	610.00	825.00
High cost, highly detailed work (including domes)	705.00	985.00	1380.00	1930.00

EXTERIOR, BASEMENT AND TOWER STAIRS – Per riser.

Concrete	289.00	395.00	530.00	730.00
Steel pans or prefab. concrete on steel	311.00	418.00	570.00	765.00
Steel or aluminum grating	364.00	479.00	625.00	810.00
Wood	108.00	166.00	255.00	386.00

For fire escapes, see Section UIP 5.

EXTERIOR BALCONIES – Apply to balcony area.

Concrete	30.50	39.00	50.50	65.00
Steel	28.75	38.75	52.00	70.50
Wood	24.10	32.25	43.25	58.00
Add for ornate finishes, balustrades	25.50	31.75	39.00	48.50

ROOF STRUCTURE – Apply to roof area.

Concrete joists, slab	17.10	19.55	22.40	25.50
Lift slab	15.30	17.35	19.75	22.50
Pan or waffle slab and joists	15.65	17.80	20.25	23.05
Precast joists and deck	15.00	17.00	19.30	22.00
Precast joists, wood deck	11.75	13.35	15.05	17.10
Cored plank on bearing walls	13.25	15.00	16.95	19.25
Thin shell	26.50	31.75	37.75	45.50
Concrete dome, cast–in–place	54.00	60.00	67.00	74.00
Thin shell	36.50	41.50	47.25	53.50
Fabric roof, air supported	57.50	62.50	68.00	74.00
Tension supported	65.00	73.00	81.50	91.00
Add for thermal liner	5.39	6.63	8.16	10.05
Steel joists, concrete slab	20.05	23.10	26.75	30.50
Gypsum on formboard	10.50	13.30	16.85	21.30
Precast deck	17.60	19.90	22.75	26.00
Steel deck	11.30	14.55	18.60	24.05
Light-gauge truss joists	9.37	12.15	15.80	20.50
Steel deck, gypsum or concrete	14.45	18.10	22.60	28.50
Wood or composition deck	9.20	11.85	15.25	19.60
Light gauge truss joists	7.87	10.30	13.45	17.60
Open steel system for Corrugated metal	4.59	6.81	10.05	14.85
Light purlin supports only	2.14	2.79	3.68	4.81
Steel space frame and sheathing three dimen.	33.75	43.00	55.50	71.50
Architectural (exclusive of glazing)	52.50	79.50	120.00	180.00
Metal dome and cover	45.75	53.50	62.00	73.00
Glazed or translucent panels	103.00	127.00	153.00	188.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

ROOF STRUCTURE (Continued)

	1	2	3	4
Wood joists, wood or comp. deck	7.27	9.45	12.35	16.05
Exposed rafters, 2" T&G sheathing	10.50	13.20	16.50	20.70
prefab. panels (exclusive of girders)	2.90	3.56	4.34	5.31
Stresskin sandwich panels (exclusive of purlins)	10.90	13.75	17.20	21.70
Add for snow roof, furred sheathing layer	3.03	3.31	3.64	3.99
Open wood system for corrugated metal	2.57	4.63	7.74	12.35
Light purlin supports only for metal, wood or fiberglass	1.25	1.63	2.14	2.78
Lamella	19.80	23.50	28.00	33.00
Wood dome and deck	30.50	37.75	46.00	56.50
Add for seismic/hurricane truss ties	0.55	0.65	0.78	0.93
Add for monitor roof	60%	50%	40%	40%
Add for sawtooth roof	40%	35%	35%	25%
Add for complex roof, turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOFCOVER – Apply to roof area.

Aluminum or steel, corrugated, crimped or tile panels, preformed light, to 26 gauge	2.95	3.83	4.96	6.45
Heavy, under 26 gauge	6.04	7.03	8.16	9.49
Formed seam, flat or standing	7.78	9.74	12.25	15.30
Batten seam	9.00	11.20	13.90	17.25
Sandwich panels, pre–engineered	12.25	15.70	20.10	25.75
Shingles	5.80	7.13	8.72	10.70
Aggregate finish	7.69	9.34	11.35	13.85
Thatch	24.90	27.50	30.50	33.50
Add for interior liner, metal	2.76	3.15	3.64	4.20
Plastic	2.43	2.87	3.37	3.98
Add for porcelain enamel finish	4.08	4.86	5.79	6.87
Add for stainless steel or Textured (Galbestos)	4.64	5.52	6.60	7.85
Asphalt, corrugated	2.33	2.74	3.23	3.80
Atrium skylight, frame and glazing	48.25	65.00	88.50	120.00
Built–up composition	2.80	3.57	4.55	5.83
Cement fiber, shingles	6.13	7.66	9.53	11.90
Corrugated or sheet (Transite)	5.55	7.97	11.40	16.45
Composition, roll, mineral surface	1.47	1.80	2.17	2.64
Composition shingles, light, to 235#	2.48	2.83	3.24	3.70
Heavy, over 235# or laminated	3.31	4.24	5.44	6.97
Copper, flat or standing seam	16.05	19.00	22.55	26.75
Batten seam	17.25	20.35	24.10	28.50
Shingles	16.30	17.70	19.25	20.90
Elastomeric or modified bitumen, single ply	4.64	6.25	8.34	11.20
Reinforced sheet or spray fluid coat	8.06	9.50	11.25	13.25
Fiberglass, corrugated or sheet, light	2.89	3.45	4.10	4.89
Sandwich panels	4.96	5.75	6.60	7.62
Heavy, FRP, over 8 oz.	5.47	7.09	9.15	11.85
Slate	11.25	13.55	16.30	19.60
Red	21.60	26.00	31.50	38.00
Composite reinforced fiber	8.00	9.72	11.85	14.40
Terne, flat or standing seam	15.75	18.55	21.80	25.50
Batten seam	17.10	20.05	23.55	27.50
Tile, clay	10.30	13.25	17.10	22.05
Concrete	7.43	8.74	10.30	12.15
Plastic or rubber	6.47	7.57	8.85	10.35
Add for custom coloring or glazing	1.90	2.43	3.09	3.95

ROOF STRUCTURE (Continued)

	1	2	3	4
Wood, shakes	5.18	6.04	7.04	8.20
Shingles	4.85	5.65	6.60	7.69
Fiber shingles	3.21	3.89	4.73	5.76
Add for fire–resistant finish	0.72	0.90	1.09	1.36
Add for roof insulation	1.34	2.12	3.30	5.05
Earth sheltered structures	2.18	3.43	5.29	8.06
Add for earth sheltered waterproofing	1.94	2.90	4.32	6.45

NOTE: For underroof insulation and supporting structures, see Ceiling Extras on Page 3. For specific earth sheltered waterproofing, see Section UIP 1. For earthen roof cover, see Fill costs on Page 1. See Section UIP 13 for top dressing, sod and/or sprinklers.

ROOF MODIFIERS – Use the following multipliers for sloping roofs to convert the unit costs to cost per square foot of horizontal roofed area.

	Rise	:	Run	Mult.	Rise	:	Run	Mult.
Less than	3'	:	12'	1.00	6'	:	12'	1.12
	3'	:	12'	1.03	8'	:	12'	1.20
	4'	:	12'	1.06	12'	:	12'	1.42
	5'	:	12'	1.08	15'	:	12'	1.60
					18'	:	12'	1.80

TRUSSES AND GIRDERS – Apply to area supported.

Steel trusses or longspan girders	3.83	4.91	6.31	8.06
Timber trusses	4.24	5.45	7.01	9.00
Glued, laminated trusses or girders	3.90	4.95	6.31	7.99

MARQUEES OR CANOPIES – Apply to horizontal area. For light false mansard structures, deduct 50% to 60%. For greater detail, see Section UIP 4 or 6.

Wood frame	36.50	45.00	55.50	69.00
Steel frame	44.50	56.50	71.00	90.00

MISCELLANEOUS

Bells, chimes and carillons	Section UIP 12
Built-in appliances, fireplaces	Section SEG 1
Elevators and escalators	Section UIP 7
Kitchen, snack bar equipment	Section UIP 12
Orchestra lifts	156000.00 – 304000.00
Ornamental columns	Section UIP 6
Specialized interior ornament	Section UIP 2
Stained glass	Section UIP 6
Theater and auditorium seating	Section UIP 12

BELL/CLOCK TOWERS

Towers frequently start at ground level and extend above the roofline. They may be an integral part of the building, simply attached or entirely separate. When the base of the tower is large enough to be used as a room, perhaps a foyer or an office and is finished inside, that portion should be priced with the rest of the building on a square foot of floor and wall area basis. A tower cost would only apply to the unfinished portion above the roofline. If all of the tower from the ground up is unfinished inside, it should all be priced as a tower. Towers are priced on a square foot of vertical surface, adding 15% to 20% to the appropriate Exterior Wall cost.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

THEATERS AND AUDITORIUMS

SECTION SEG 6
(SEGREGATED COST METHOD)

NUMBER OF STORIES MULTIPLIER

To allow for the cost of hoisting materials, increased labor costs, and miscellaneous costs due to high-rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% for each story over three.

Example: Seven-story building: Multiplier = 1.010

SPECIAL HEIGHT MULTIPLIER – TALL BUILDINGS

To allow for the cost of hoisting materials, increased labor costs, and other increased costs due to great wall heights on major theaters or other tall single-story buildings, multiply the total Segregated Cost of these buildings by 100% plus .25% for each foot over 30 feet of wall height.

Example: Story height = 50 feet: Multiplier = 1.050

COMPLETION OF BUILDING VALUATION

Contractors' overhead and profit, sales taxes, permit fees and insurance during construction are included in the above costs. Interest on interim construction financing is also included, but not financing costs, real estate taxes or brokers' commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers, which bring the basic costs up to date for each locality, are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

Sheds include low cost, utilitarian buildings are generally found near industrial buildings and on farms ranches. They are usually lighter than typical industrial or warehouse buildings.

Farm buildings ranging from simple sheds to major buildings and large general purpose barns may be priced from this section.

Grain elevators, silos, and grain and feed bins may be priced from CAL 399-400.

Greenhouses and lath houses may be priced from CAL 96-101.

The costs given include professional construction labor. Farm or ranch–built buildings must be graded according to the quality of workmanship, and sometimes the value of the labor is very low, bringing the end costs below those listed.

Foundations may be quite heavy for some large farm buildings, while in areas not under any building codes, they may be very light, or the buildings may be supported only by wood blocks or sills or column footings, where the cost is generally proportional to the perimeter.

Such costs for light shell–type structures may be better computed on the basis of linear footage of bearing wall, with costs of column footings added, if there are interior columns supporting a roof or floor load above. Basement or pit walls are not a part of the foundation, but of the basement or pit, which is computed separately. When basement walls replace part of the foundation, a lower cost rank should be considered, always including the cost for a foundation.

Interior construction costs include feed and storage bins, tackrooms, cow stanchions and stalls, conforming to the quality of the building, but do not include items normally classed as equipment such as cages, display boxes, machinery, conveyors, etc.

Exterior walls may contain doors and windows or vent panels, or they may have none at all. Therefore, the exterior wall costs vary widely, depending on the amount and quality of fenestration.

Roof structures and covers may be quite heavy, with good venting, skylights and guttering, or they may be very light, with no flashings or ancillary components.

SEGREGATED COSTS

(For explanation of the rating numbers see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation, bulk (per cu. ft.) . .	0.41	0.57	0.78	1.08
Fill (per cu. ft. of compacted earth)	0.43	0.56	0.72	0.94
Site preparation (per sq. ft. of site)	0.34	0.44	0.60	0.80

FOUNDATION - Table I gives complete average costs per square foot of floor area. If a more detailed estimate is desired for Class C, D or S buildings with continuous or column footing foundations, use Tables II and/or III as appropriate.

TABLE I. CONCRETE FOUNDATIONS - Apply to total floor area including basements, but excluding mezzanines or lofts.

Continuous Foundations:				
Class A	2.95	4.08	5.56	7.64
Class B	2.98	4.09	5.58	7.59
Class C, bearing wall	2.57	3.53	4.87	6.72
Non–bearing wall	2.39	3.33	4.64	6.47
Class D, masonry veneer, concrete	2.31	3.21	4.47	6.24
Treated wood	2.39	3.08	4.00	5.16
Siding or stucco, concrete .	1.98	2.78	3.86	5.41
Treated wood	1.72	2.27	2.95	3.86
Pole–frame construction . . .	1.88	2.62	3.61	5.00
Class S	1.95	2.79	3.93	5.60
Classes C, D and S light perimeter foundation for open shell type structures	0.96	1.35	1.91	2.68
Add for perimeter insulation, ground floor area only	0.15	0.28	0.44	0.71
Earth sheltered structures .	0.19	0.35	0.62	1.02
Column Footing Foundations Only:				
Steel columns, light pre–engineered frame	0.31	0.50	0.79	1.22
Light tubular/pipe frame . . .	0.32	0.45	0.66	0.94
Wood columns	0.52	0.79	1.18	1.78
Light pole frame	0.36	0.50	0.69	0.95
Piers with concrete footings . .	0.36	0.93	1.78	3.04
Wood blocks or sills	0.44	0.86	1.51	2.48

CONCRETE FOUNDATIONS (Continued) - ALTERNATE METHOD

TABLE II. CONCRETE FOUNDATIONS - Apply to linear footage of continuous footings or foundation walls if Table I is not used. See discussion above.

	1	2	3	4
Heavy grade beam or stem footing				
Class C	30.75	42.50	58.50	81.50
Class D, masonry veneer, concrete	27.50	38.75	55.00	76.00
Treated wood	29.50	38.25	49.50	64.00
Siding or stucco, concrete .	24.25	34.25	48.00	68.00
Treated wood	21.35	28.00	36.50	47.75
Class S	24.45	34.50	49.25	69.50
Classes C, D and S, reinforced				
Light grade beam	18.75	26.75	38.25	54.50
Unreinforced grade beam . .	9.57	13.70	19.65	28.00
Wood, treated, sills	3.28	4.83	7.14	10.50
Add for perimeter insulation . . .	1.36	2.81	4.98	8.22
Earth sheltered structures .	2.06	4.24	7.50	12.35
Add for perimeter radon control matting	4.36	4.94	5.60	6.34
Add for perimeter raised floor skirting/knee wall	12.65	14.25	16.15	18.10

TABLE III. CONCRETE COLUMN FOOTINGS - Apply to total number of columns if Table I is not used.

Concrete columns	67.50	116.00	189.00	294.00
Steel columns	62.50	108.00	176.00	283.00
Light pre–engineered frame	53.00	70.00	91.50	121.00
Light tubular/pipe frame . . .	40.25	56.00	79.00	109.00
Wood columns	57.00	90.50	142.00	220.00
Light pole frame	40.00	55.50	77.00	108.00
Piers, precast concrete footing .	13.90	24.50	40.25	64.00
Formed in place	54.50	65.50	80.00	96.50

FOUNDATION ADJUSTMENTS - Apply to base cost used.

Add 1% for each foot of average story height over a 10’ base height.
Subtract 1% for each foot of average story height under a 10’ base height.

For one–story buildings with foundations and footings formed and poured monolithically with floor slabs, use 70% of costs above.

Add for pilings from UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

FRAME - Apply to total floor area including basements, but excluding mezzanines or lofts.

	1	2	3	4
Bearing walls, wood or steel floor supports only	1.72	2.04	2.44	2.87
Masonry supports only	2.48	2.93	3.46	4.08
Steel, fireproofed, Class A	18.25	21.30	24.90	29.00
Composite concrete/steel, Class B	16.05	18.50	20.95	23.90
Concrete, reinforced, Class B	15.65	18.15	21.05	24.30
Precast, post-tensioned	15.20	17.45	19.90	22.70
Steel, Classes C and D	6.07	7.69	9.72	12.30
Class S	5.78	7.36	9.34	11.90
Light pre–engineered frame	3.66	4.63	5.85	7.42
Slant–wall frame	3.01	3.63	4.38	5.29
Light tubular/pipe frame	2.19	2.93	3.93	5.29
Hoop–arch frame	1.63	2.18	2.85	3.77
Add for fireproofing	1.08	1.66	2.48	3.75
Steel columns, wood beams	4.26	5.65	7.54	10.05
Wood, A–frame construction	4.85	6.04	7.54	9.36
Laminated bents and arches	5.51	6.87	8.56	10.65
Light arch–rib construction	3.46	4.36	5.52	7.00
Mill–type (heavy timber) construction	5.75	7.18	8.93	11.15
Heavy timber/log construction, architectural	11.15	14.55	18.95	24.60
Post and beam construction	3.94	4.92	6.17	7.73
Light pole type construction	2.24	2.90	3.81	5.00
Add for seismic/wind bracing for open, Class C/D/S frames	1.08	1.40	1.82	2.34

FRAME ADJUSTMENTS - Apply to base cost used.
Add 2% for each foot of average story height over a 10' base height. Subtract 2% for each foot of average story height under a 10' base height. For partially framed structures, see UIP 1.

FLOOR STRUCTURE - Apply to area of described floor, mezzanine or loft.

Clay	1.22	1.43	1.68	1.99
Compacted earth	0.34	0.40	0.47	0.57
Gravel	0.72	0.85	1.00	1.19
Sand with crushed stone base	2.31	2.74	3.26	3.87
Asphalt, on ground, including base	2.74	3.46	4.38	5.55
Concrete: on ground exclusive of vapor barrier	4.50	5.46	6.64	8.06
Plain (unreinforced)	3.95	4.73	5.68	6.85
Lift slab	13.70	15.40	17.45	19.75
Elevated flat slab and joists	15.40	17.45	19.90	22.50
Pan or waffle slab and joists	14.30	16.15	18.15	20.45
Precast joists and deck	13.50	15.20	17.10	19.25
Precast joists, wood sheathing	10.60	11.95	13.45	15.15
Cored plank on bearing walls	11.75	13.25	14.90	16.85
Steel joists: flat slab	16.85	19.15	21.90	24.95
Corrugated deck and concrete	11.90	14.40	17.50	21.35
Cellular deck and concrete	16.50	19.15	22.40	26.25
Ventilated deck and plenum assembly	14.00	16.40	19.15	22.40
Open metal grating	24.80	33.50	45.00	61.50
Precast deck	14.75	16.70	18.90	21.35
Wood sheathing	7.41	9.67	12.65	16.50
Light gauge truss joists	6.67	8.76	11.50	15.15
Wood: boards on ground or elevated (w/o supports)	1.63	2.09	2.71	3.46
Boards or plywood on ground with sleepers	1.98	2.58	3.34	4.34
Joists and sheathing	6.40	8.39	11.00	14.40
Joists and bridging only	4.76	6.44	8.72	11.85

For treated wood, increase costs by 10% to 20%.

FLOOR EXTRAS - Add to floor structure costs.

	1	2	3	4
Vapor barrier	0.94	1.31	1.83	2.56
Each inch of slab on grade over 8", add	1.64	1.92	2.21	2.56
Each inch of sheathing or boards over 1", add	0.69	0.80	0.93	1.08
Slotted floors (excluding floor supports), concrete	8.79	9.71	10.70	11.85
Metal or plastic	4.96	6.43	8.40	10.90
Wood	3.86	4.90	6.27	7.97
Manure gutter, gutter area only (w/o grating)	7.07	7.82	8.62	9.55
Foamed concrete surfacing, 1½" - 2"	1.34	1.66	2.06	2.56
Floor insulation, add	0.99	1.22	1.52	1.90
Cold storage	2.06	2.61	3.27	4.11
For each inch over 2", add	0.41	0.60	0.88	1.27

FLOOR COVER - Apply to area of described floor.

Asphalt tile	2.89	3.39	3.99	4.69
Block, wood, treated	9.03	10.75	12.75	15.15
Brick, common, in mortar	11.50	13.60	16.05	18.95
Brick pavers, in concrete	13.50	16.15	19.30	23.05
Carpet and pad	2.80	4.51	7.06	10.85
Indoor/outdoor	2.71	3.46	4.43	5.69
Color, concrete	1.30	1.64	2.08	2.64
Cork	7.73	8.99	10.50	12.15
Diato, magnesite, etc.	9.87	11.50	13.40	15.60
Gratings, plastic	13.50	21.95	34.50	53.50
Steel or aluminum	14.50	22.55	34.50	52.50
Stainless steel	64.50	89.00	127.00	177.00
Hardener and sealer, concrete	0.99	1.36	1.87	2.56
Heavy duty	2.31	2.93	3.70	4.69
Aggregate topping	6.75	8.75	11.35	14.80
Hardwood	10.55	13.85	18.20	23.80
Leather	49.75	58.00	68.00	79.00
Linoleum	4.76	5.76	6.95	8.37
Melamine laminated tile or sheet	3.70	5.10	7.04	9.69
Deluxe	9.87	11.60	13.65	16.15
Plastic tile, interlocking	9.87	10.95	12.15	13.50
Rubber fabric tile	13.00	15.15	17.70	20.55
Rubber tile or sheet	5.19	7.04	9.56	13.00
Seamless plastic, epoxy, urethane, neoprene, 1/32" - 1/16" thin–coat	5.01	6.23	7.71	9.55
1/8" - 3/8"	8.22	10.20	12.60	15.60
Add for colored chips or glitter	2.14	2.68	3.34	4.20
Softwood	8.71	10.45	12.50	15.05
Stone Plank	18.95	23.00	28.00	33.75
Terrazzo (exclusive of base slab)	14.15	17.55	21.65	26.75
Tile, ceramic or quarry	13.80	17.55	22.10	28.00
Wood over concrete, hardwood	12.50	16.05	20.50	26.25
Parquet block, prefinished, in mastic	11.50	15.85	21.60	29.75
Softwood	10.05	11.90	14.20	16.85
Vinyl composition, tile or sheet	2.64	3.27	4.04	5.01
Vinyl sheet	4.20	5.70	7.75	10.55
Vinyl tile	4.36	6.34	9.16	13.30

CEILING - Apply to area of described ceiling. To convert costs to floor area for high–pitched ceilings, use the roof slope multipliers found on Page 8 of this section.

Acoustical ceilings, tile or panels:				
Mineral fiber, fiberglass, panels only	1.64	2.37	3.42	4.94
Organic fiber, wood or cane, panels only	2.56	3.02	3.57	4.20
Gypsum board, taped and painted	2.80	3.09	3.42	3.79
Spray on texture	2.64	2.92	3.21	3.55
Paint or stain, bottom of roof or floor	0.77	1.03	1.40	1.90

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

CEILING (Continued)	1	2	3	4
Plaster on lath				
spray on, thin coat with texture				
on lath or drywall	3.95	4.41	4.94	5.51
Standard, add 20% for Keene's	4.76	5.39	6.11	6.92
Add for metal lath	0.69	0.80	0.93	1.08
Plaster on masonry soffit:				
Spray on, thin coat with texture	3.21	3.55	3.93	4.36
Standard, add 24% for Keene's	3.95	4.49	5.11	5.85
Plastic panels, with suspension system,				
but excluding lighting	8.22	9.97	12.05	14.65
Plywood (softwood) or hardboard				
panels	3.87	4.61	5.51	6.59
Unfinished	1.99	2.21	2.45	2.71
Hardwood	5.69	6.95	8.47	10.35
Polylaminated panels (FRP)	4.20	4.70	5.27	5.94
Insulated panel	6.42	7.25	8.16	9.19
Wood, boards or T&G, softwood	3.70	4.45	5.38	6.51
Hardwood	6.34	7.51	8.88	10.55

CEILING EXTRAS - Add to area of described ceiling. To convert costs to floor area for high–pitched ceilings, use the roof slope multipliers found on Page 8 of this section.

Ceramic tile	16.50	21.60	28.25	36.75
Wood furring	1.27	1.56	1.94	2.39
Metal furring	1.99	2.50	3.14	3.95
If ceiling structure is required which is no				
part of the roof or floor structure,				
add	1.99	2.50	3.14	3.95
Suspended ceiling, metal				
suspension sys. add	1.72	2.24	2.89	3.70
Fiberglass, FRP	2.80	3.40	4.13	5.01
Hardwood, decorative	4.76	6.53	8.90	12.15
Seismic supports, add	0.34	0.43	0.56	0.71
Ceiling insulation, add	0.94	1.19	1.50	1.90
Vinyl faced, exposed	1.37	1.59	1.86	2.14
Add for underdeck supporting				
Bands	0.43	0.52	0.62	0.72
Rigid board, faced	1.90	2.46	3.23	4.20
Cold storage	2.80	3.77	5.07	6.84
For each inch over 2", add	0.41	0.60	0.88	1.28
Vapor barrier, plastic	0.19	0.27	0.37	0.53

For specific cold storage insulation, see Section 58.

INTERIOR CONSTRUCTION - See UIP 2 or 5 for detailed costs. TABLE I. Apply to total floor area. Partition heights and materials should be considered in selecting the cost column. Costs do not include items normally classed as equipment. See UIP 7 for cold storage costs.

FRAME INTERIOR PARTITIONS:				
Arenas	0.85	3.66	7.87	14.10
Lean–tos	1.81	4.34	8.14	13.80
Barns, free stall	2.05	2.52	3.07	3.77
Confinement	1.30	1.81	2.51	3.46
General purpose	1.45	2.81	4.83	7.89
Special purpose	6.08	7.31	8.76	10.50
Boat storage (including racks)	12.15	16.90	23.75	33.25
Calving barns	0.96	1.63	2.68	4.19
Commodity barns and sheds	2.05	3.84	6.52	10.50
Commodity warehouse	0.40	0.95	1.75	2.95
Cotton gins (including tunnels)	30.50	43.00	61.00	85.50

INTERIOR CONSTRUCTION (Continued) FRAME INTERIOR PARTITIONS:	1	2	3	4
Dairies and milking parlors	4.67	6.48	8.92	12.35
Dehydrator buildings	22.95	25.75	29.00	33.00
Equipment buildings, sheds and				
shops, commercial	0.36	0.75	1.29	2.12
Farm implement	0.32	0.47	0.69	1.00
Farm cold storage	0.14	0.93	2.09	3.86
Controlled atmosphere	3.36	4.60	6.34	8.69
Feed handling and mixing buildings	0.62	0.75	0.92	1.09
Feeder barns and sheds, cattle,				
sheep	0.32	0.44	0.60	0.85
Fertilizer storage, bag	2.39	2.90	3.51	4.27
Bulk	9.03	9.88	10.85	11.85
Fruit packing	5.51	6.81	8.37	10.35
Golf cart storage	12.00	13.30	14.70	16.25
Golf starter booths	22.60	27.50	33.25	40.25
Grain storage, granary				
(including bins and ducts)	6.32	7.05	7.83	8.69
Hog barns (excluding crates),				
breeding/gestation	1.38	2.52	4.22	6.75
Farrowing	1.88	3.36	5.56	8.86
Finishing/growing	1.18	1.72	2.54	3.70
Nursery	2.80	4.66	7.50	11.65
Sheds	1.18	1.45	1.79	2.24
Modified sheds	1.30	1.68	2.12	2.72
Labor dormitories	1.08	2.97	5.79	10.00
Lumber storage (including racks)	2.48	3.46	4.82	6.75
Milk houses and sheds	0.44	1.26	2.52	4.34
Potato storage	2.24	6.09	11.90	20.50
Poultry, cage houses, enclosed,				
(excluding cages)	1.35	2.25	3.54	5.51
Screened	0.17	0.79	1.72	3.11
Floor operations, breeder houses	0.19	0.47	0.93	1.58
Broiler houses	0.07	0.20	0.40	0.67
Seed processing storage	3.04	3.71	4.52	5.51
Shed office structures	21.35	23.80	26.50	29.50
Sheep barns	1.05	1.56	2.34	3.46
Sheds	0.70	1.02	1.48	2.12
Stables	3.28	5.85	9.69	15.40
High–value (estate)	15.40	25.75	40.75	64.00
Tobacco barns (including racks),				
air curing	3.53	4.23	5.08	6.08
Flue curing	4.27	5.22	6.38	7.81
Transient labor cabins	1.00	1.71	2.74	4.27
Turkey barns	0.14	0.33	0.62	1.06
Utility buildings, commercial	0.23	0.53	0.98	1.63
Manufacturing	0.87	1.99	3.66	6.15
Vegetable buildings, environmental	12.15	13.55	15.05	16.80
Add for masonry partitions	15%	13%	11%	10%

MEZZANINES - Apply to open mezzanine or loft area. (Cost of miscellaneous items such as rail, stairs, etc.). For stepped balcony structures, see SEG 6.

Mezzanine, finished	2.64	3.11	3.69	4.34
Barn loft, unfinished	0.20	0.30	0.44	0.67

MISCELLANEOUS - Apply to linear footage of walkway.

Catwalks, steel	158.00	181.00	214.00	247.00
Wood	60.00	71.00	84.00	99.00
Ladders, steel	24.75	33.00	44.00	58.50
Wood	18.50	24.95	33.50	45.25

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

TABLE II. - ALTERNATE METHOD - Apply to square footage of partition area. Do not use these costs if Table I is used. Costs do not include doors, cabinetry or other interior items. For unfinished pen wall partitions, deduct 20%. For treated wood, increase costs by 10%.

	1	2	3	4
Wood frame, unfinished board on				
One side	3.86	4.60	5.51	6.58
Two sides	5.33	6.42	7.79	9.36
Each inch of board over 1", add	1.72	1.96	2.25	2.55
Deduct for spaced boards	0.70	0.86	1.06	1.30
Add for metal panels	0.14	0.19	0.24	0.33
Add for finished wood or gypsum board, per side	0.96	1.10	1.29	1.49
Add for polylaminated panel, per side	2.05	2.37	2.72	3.11
Add for concrete curb, per linear foot	4.52	5.79	7.43	9.52
Masonry partitions, unfinished, block	9.68	11.00	12.45	14.10
Concrete	11.00	12.80	14.85	17.30
Add for plaster finish, each side	0.66	0.75	0.86	0.99
Steel rods pens	5.66	5.82	5.99	6.15

For treated wood, increase costs by 10%.

PLUMBING - Use UIP 3 if more detailed costs are desired. See Apply to total floor area.

Arenas	0.19	1.02	2.27	4.11
Lean–tos	0.28	1.64	3.70	6.75
Shelters	0.18	0.34	0.60	0.99
Barns, free stall and confinement	0.24	0.63	1.24	2.14
General purpose and sheep	0.28	0.80	1.61	2.80
Special purpose	2.31	4.15	6.91	11.00
Calving barns	0.25	0.62	1.16	1.99
Commodity warehouse	0.74	1.03	1.41	1.99
Cotton gins	1.19	1.71	2.46	3.55
Dairies and milking parlors	1.90	4.55	8.53	14.50
Dehydrator buildings	6.08	6.69	7.34	8.06
Equipment buildings, sheds and shops, commercial	1.03	1.40	1.94	2.64
Farm implement	0.25	0.57	1.06	1.80
Farm cold storage	0.46	1.62	3.34	5.94
Feed handling and mixing buildings	0.34	0.55	0.85	1.31
Feeder barns	0.25	0.29	0.35	0.43
Fertilizer storage, bulk	1.34	1.62	1.97	2.39
Fruit packing	0.57	1.58	3.09	5.35
Golf cart storage	1.38	1.80	2.36	3.05
Golf starter booths	6.51	8.52	11.15	14.65
Greenhouses	0.32	0.41	0.55	0.71
Hog barns, breeding, farrowing and finishing	0.90	1.34	2.03	3.05
Nursery	1.36	2.03	3.01	4.43
Hog and sheep sheds	0.32	0.44	0.63	0.90
Modified sheds	0.43	0.84	1.41	2.31
Labor dormitories	0.84	2.06	3.87	6.59
Milk houses and sheds	4.20	5.35	6.85	8.71
Potato, controlled atmosphere and vegetable storage	0.21	0.32	0.53	0.80
Poultry, cage houses, enclosed and screened	0.74	1.56	2.78	4.61
Floor operations and turkey barns	0.31	0.47	0.72	1.09
Seed processing storage	0.28	0.62	1.12	1.90
Shed office structures	4.36	5.73	7.53	9.87
Stables	0.24	1.65	3.80	7.00
High–value (estate)	7.25	9.66	12.90	17.25
Storage buildings and sheds; boat, lumber, material	0.32	0.46	0.68	0.99
Tobacco barns	0.31	0.84	1.62	2.80
Transient labor cabins and shelters	2.06	2.77	3.73	5.01
Utility buildings, commercial	0.72	0.99	1.33	1.80
Farm buildings and lean–tos	0.25	0.56	1.03	1.72
Manufacturing	1.10	1.83	2.87	4.43

SPRINKLERS - Apply to sprinklered area. Costs include all piping and meters but do not include tanks and pumps. For fly control assemblies, deduct 50% to 75%.

	1	2	3	4
1,000 square feet	4.94	6.42	8.34	10.85
2,500	4.27	5.50	7.04	9.03
5,000	3.87	4.92	6.28	7.99
7,500	3.62	4.58	5.79	7.32
10,000	3.45	4.35	5.50	6.92
15,000	3.21	4.05	5.14	6.51
20,000	3.12	3.90	4.88	6.08
40,000	2.80	3.49	4.32	5.35
60,000	2.64	3.26	4.01	4.94
80,000	2.48	3.08	3.85	4.76
100,000	2.39	2.96	3.65	4.52
125,000	2.31	2.86	3.54	4.36
150,000	2.24	2.76	3.39	4.20

HEATING, COOLING AND VENTILATION - Apply to heated or cooled area or see UIP 3. Add or deduct 3% for each foot of deviation from a 10' base height.
Costs are given for gas fired heating surfaces. Add or deduct as follows for oil fired +7%

Heating Only				
Electric cable or baseboard	3.21	3.95	4.88	6.01
Radiant panels	3.05	3.49	3.96	4.52
Electric wall heaters (inc. FWA)	1.64	1.92	2.21	2.56
Forced air, ducted	3.37	4.26	5.35	6.75
Heaters or furnace, vented	0.97	1.22	1.52	1.90
Hot water, baseboard or radiators	5.69	7.29	9.36	12.00
Radiant floor	5.19	6.92	9.25	12.35
Boiler, piping only	3.21	3.96	4.91	6.08
Radiant heat, gas, suspended	1.80	2.34	3.01	3.87
Solar heat, active air	3.37	3.68	4.01	4.36
Space heaters, gas, with fan	1.31	1.77	2.43	3.30
Steam coil, with boiler	2.48	3.03	3.70	4.52
Without boiler	1.64	2.09	2.65	3.37
Add for fan–jet duct distribution	0.62	0.80	1.05	1.36
Steam, radiator, with boiler	5.51	6.88	8.56	10.70
Without boiler	4.52	5.76	7.35	9.37
Wall or floor furnace	1.72	2.09	2.53	3.05
Heating and Cooling				
Zoned A.C., hot and chilled water	14.30	17.85	22.10	27.50
warm and cooled air	8.71	10.95	13.75	17.25
Package heating and cooling, short ducts	5.94	7.76	10.15	13.30
Heat pump system	6.51	8.60	11.40	15.15
Add for ground loop heat source	1.90	2.48	3.26	4.27
Individual thru wall heat pumps	3.12	4.18	5.61	7.50
Cooling Only				
Evaporative coolers, short ducts	3.05	3.64	4.35	5.19
Coolers only	2.06	2.42	2.81	3.30
Refrigerated air conditioning only,				
Zoned system	6.08	7.50	9.21	11.35
Package unit, short ducts	4.11	5.29	6.81	8.71
Cooling units only	2.71	3.67	4.98	6.75
Ventilation only, with ducts and				
Blowers	1.06	1.28	1.56	1.90
Fans only	0.47	0.56	0.66	0.77
Controlled–atmosphere, environmental buildings				
livestock, air/air exchanger	3.12	3.54	3.99	4.52
Earth–tube	6.51	7.31	8.19	9.19
Nonenvironmental buildings, potato/fruit packing, etc.				
Conditioned air	2.96	3.74	4.73	6.01
Cooled air	8.13	10.10	12.50	15.45

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

ELECTRICAL AND LIGHTING - Apply to total floor area. See UIP 3 for detailed costs of service panels and costs per outlet.

	1	2	3	4
Finished buildings:				
Non-metallic	3.79	5.66	8.38	12.50
Armored cable (BX)	4.52	6.72	9.96	14.80
Flexible conduit	5.35	7.99	11.85	17.75
Rigid conduit	6.34	9.43	14.05	21.00
Exposed circuits:				
Non–metallic	1.61	2.11	2.77	3.62
Armored cable (BX)	1.99	2.56	3.31	4.27
Flexible conduit	2.48	3.11	3.92	4.94
Rigid conduit	3.12	3.86	4.73	5.85

Typical costs for some finished and unfinished occupancies.

Arenas	0.28	1.61	3.61	6.59
Lean–tos	0.44	1.37	2.77	4.86
Shelters	0.31	0.87	1.69	2.96
Barns, free stall and confinement	0.31	0.74	1.40	2.39
General purpose and sheep	0.32	0.90	1.75	3.05
Special purpose	2.71	3.95	5.76	8.37
Bulk oil storage	2.31	2.92	3.67	4.61
Calving barns	0.41	1.00	1.90	3.21
Commodity warehouses	0.32	0.91	1.80	3.12
Cotton gins	1.58	2.27	3.23	4.61
Dairies and milking parlors	2.39	4.07	6.60	10.35
Dehydrator buildings	36.75	41.00	44.50	49.75
Equipment buildings, sheds and shops,				
Commercial	1.13	1.72	2.64	3.95
Farm implement	0.34	0.91	1.75	3.05
Farm cold storage & controlled–atmosphere buildings	2.39	3.83	6.00	9.19
Feed handling and mixing	1.12	1.44	1.87	2.39
Feeder barns	0.31	0.52	0.81	1.27
Fertilizer storage, bag	2.31	2.92	3.67	4.61
Bulk	2.56	3.57	4.96	6.92
Flathouse storage	0.55	0.87	1.34	2.06
Fruit packing	2.56	3.57	4.96	6.92
Golf cart storage	3.55	4.77	6.48	8.71
Golf starter booths	4.61	6.08	8.00	10.55
Greenhouses	0.32	0.97	1.94	3.37
Hog barns, breeding/gestation	1.27	2.06	3.26	5.01
Farrowing	1.64	2.62	4.07	6.26
Finishing/growing	1.09	1.47	2.02	2.71
Nursery	2.31	3.54	5.33	8.06
Hog and sheep sheds	0.44	0.65	0.94	1.37
Labor dormitories	1.64	2.64	4.11	6.34
Milk houses and sheds	3.70	5.26	7.51	10.70
Potato storage	0.28	0.84	1.65	2.89
Poultry, cage operation, enclosed houses	1.58	2.42	3.65	5.51
Screened houses	1.28	2.06	3.23	4.94
Floor operations and turkey barns	0.44	0.80	1.34	2.14
Seed processing storage	2.14	2.81	3.73	4.94
Shed office structures	3.37	4.46	5.95	7.90
Stables	0.44	1.50	3.08	5.42
High value (estate)	5.51	8.68	13.45	20.55
Storage buildings, boat and material	1.36	2.31	3.73	5.85
Lumber	0.57	1.22	2.20	3.62
Storage sheds and shelters	0.32	0.74	1.37	2.31
Tobacco barns, air curing	0.31	0.55	0.88	1.40
Flue curing	1.34	1.61	1.94	2.31
Transient labor cabins and shelters	1.00	1.64	2.61	4.04
Utility buildings, commercial/commodity				
Warehouses	0.31	0.84	1.62	2.80
Farm buildings, corncribs, toolsheds and lean–tos	0.28	0.49	0.80	1.28
Manufacturing	2.24	4.30	7.40	12.00
Vegetable storage buildings	1.13	2.53	4.58	7.65

EXTERIOR WALL- Apply to total wall area.

Concrete or Masonry Walls				
Adobe or hollow clay block, 6”	24.95	28.25	31.75	36.00
8”	26.50	30.00	34.25	39.00
12”	30.00	34.25	39.00	44.00
14”	33.25	37.75	43.00	49.00
Adobe block, grouted or cavity,				
22” - 24”	38.25	43.25	49.25	56.50
30” - 32”	41.75	47.50	53.50	61.50
Block, concrete, 6”	21.70	24.55	27.75	31.25
8”	23.30	26.50	29.75	33.75
12”	26.50	30.00	34.00	38.50
16”	29.75	33.75	38.25	43.25
For each additional 4” of block, add	3.37	3.79	4.28	4.81
Block, grouted or cavity, 10” - 12”	25.25	28.50	32.25	36.50
*Add for ornamented face block	1.93	2.94	4.42	6.67
Brick, block backup, 8”	27.75	31.50	36.00	40.75
12”	31.25	35.75	40.25	45.50
16”	34.75	39.25	44.25	50.50
Brick common, 8”	31.25	35.50	40.00	44.75
12”	39.00	43.50	49.25	56.00
16”	46.50	52.00	58.50	66.00
For each additional 4” of brick, add	7.73	8.53	9.44	10.45
Brick, grouted or cavity, reinforced,				
9” - 10”	34.75	39.00	44.00	49.75
Block backup, 9” - 10”	30.75	35.00	39.75	44.75
Block backup, 12” - 14”	34.25	39.00	43.50	49.75
Brick, 6” SCR modular	23.30	26.75	30.50	35.00
8”	26.25	29.75	34.00	38.50
*Add for face brick	4.02	4.41	4.83	5.30
Concrete, reinforced, formed,				
4”	24.05	27.25	31.25	35.50
6”	26.25	29.50	33.75	38.25
8”	28.50	32.00	36.00	40.75
12”	32.50	36.50	41.00	46.50
For each additional 4” of concrete, add	4.17	4.51	4.90	5.30
Precast panels, 2”	20.10	22.85	25.75	29.25
4”	21.70	24.55	27.75	31.25
6”	23.70	27.00	30.50	34.75
8”	26.50	29.75	33.50	37.75
12”	31.25	35.25	39.25	44.00
tilt–up panels, 4”	19.75	22.55	25.75	29.75
6”	21.35	24.30	27.75	31.75
8”	22.90	26.25	30.00	34.75
10”	24.50	28.25	32.25	37.00
12"	26.50	30.50	35.00	40.00
Add for insulated sandwich	2.08	2.64	3.32	4.17
Add for brick or tile inserts	8.37	10.20	12.40	15.15
Glass block, white or aqua	62.00	66.50	70.50	75.50
Colors or reflective	81.50	87.00	93.50	99.50
Local stone, block backup, ashlar				
Veneer, 12”	49.00	57.00	65.00	74.00
Rubble or rustic, veneer, 12”	39.00	45.00	52.50	62.00
For each 4” variation in thickness	3.37	3.79	4.28	4.81
Local fieldstone, in mortar, 12”	37.00	42.50	48.75	56.00
For each 4” variation in thickness	3.30	3.83	4.48	5.23
Local stone, rough cut, solid, 12”	62.50	72.00	83.00	96.50
Granite	65.00	77.00	91.50	108.00
Limestone	70.50	81.50	93.50	107.00
For each 6” variation in thickness	29.00	34.75	41.00	49.00
Rammed earth, soil cement, 24”	26.25	30.25	35.25	40.75
Pneumatic build–up, formed one side	41.75	47.50	54.00	62.00
For each 6” variation in thickness	1.69	1.97	2.33	2.74
Tile, structural clay, 6”	22.90	26.25	30.00	34.25
10”	27.00	30.50	35.00	39.75

***NOTE: -** The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face or synthetic masonry veneer, see wall ornamentation on Page 7 of this section.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

	1	2	3	4
Masonry Wall Extras				
Add for stay in place forming	1.40	1.90	2.58	3.46
Add for glazed block or tile, each side	8.53	9.41	10.35	11.45
Add for pilasters	1.48	1.82	2.25	2.74
Add for bond beams	1.60	1.93	2.33	2.81
Add for seismic reinforcement	0.68	1.12	1.79	2.81
Add for synthetic plaster on rigid insulation (EIFS)	6.85	8.37	10.25	12.55
Deluxe, textured or aggregate	11.45	13.60	16.20	19.25
Add for thin masonry on rigid insulation	16.50	18.50	20.70	23.30
Add for clay tile back up in lieu of block	2.74	3.32	3.99	4.81
Add for earth sheltered waterproofing	1.23	1.80	2.71	4.02
Add for insulation	0.99	1.43	2.06	2.98
Earth sheltered structures	1.60	2.36	3.44	5.06
Deduct for plain shed type walls	6.93	8.10	9.48	11.10
Buttresses - Apply to cubic footage of buttress wall area.				
Concrete	27.25	31.75	36.75	42.50
Masonry	33.75	38.25	43.25	49.00
Local stone, ashlar veneer	59.50	67.50	77.00	87.00
Rubble or rustic veneer	42.50	50.00	59.00	69.00
Rough cut, solid, local stone	46.50	57.50	70.50	86.00
Curtain Walls				
Brick or tile panels	32.50	38.75	46.50	55.00
Concrete and glass panels, precast	41.00	47.50	55.00	63.00
Glass fiber reinforced, molded	33.75	41.25	51.00	62.00
Metal and glass panels (ordinary)	44.25	52.50	61.50	72.50
Stainless steel or bronze and glass	66.50	76.50	87.50	102.00
Stone panels, local stone	63.00	68.50	75.00	82.00
Granite	66.50	75.00	84.50	96.50
Limestone or slate	63.50	70.00	76.50	84.50
Marble	63.50	72.00	82.00	93.50
Composite or aggregate panels	39.50	49.00	61.00	75.00
Structural glazed atrium including supports	95.00	127.00	169.00	233.00
Steel studs and stucco	23.80	28.00	32.75	38.00
Synthetic plaster on rigid insulation (EIFS)	26.75	32.00	38.25	46.50
Deluxe, textured or aggregate	31.75	37.50	44.25	52.50
wood or aggregate board siding	23.05	28.50	35.00	42.75
Add for insulation, insulated areas only	1.37	2.00	2.90	4.20
Pre–engineered Walls				
Sandwich panels, alum. or steel, both sides	24.45	28.75	34.00	39.75
Cold storage, metal both sides	30.50	35.00	39.75	45.50
Cement fiber or shotcrete, two sides	17.05	21.20	26.50	33.00
Fiberglass panels, two sides	23.15	28.00	34.00	41.25
Glass exterior, metal interior	27.25	32.25	38.00	44.75
Add for stainless steel or textured (Galbestos)	4.23	5.09	6.15	7.42
Add for polylaminated (FRP) interior	1.09	1.36	1.70	2.11
Deduct for gypsum or hardboard interior	1.79	2.01	2.26	2.53
Prefabricated building panels				
Aluminum or steel and glass panels	37.00	41.00	45.00	50.00
Add for porcelain enamel finish	3.66	4.39	5.29	6.34
Add for block backup	7.73	8.73	9.80	11.05
Stucco on steel panel	39.00	44.00	50.00	56.00
Veneer, block or brick,				
On steel panel	44.75	51.50	59.00	67.00
Stone, rubble or rustic	59.00	65.00	72.00	79.00

EXTERIOR WALL (Continued)

Fabric covers, see Page 8.

	1	2	3	4
Single Wall Construction				
Aluminum or steel, on steel frame	6.75	8.80	11.50	15.05
On wood frame	5.94	7.81	10.25	13.50
Add for porcelain enamel finish	3.70	4.45	5.38	6.51
Add for stainless steel or textured (Galbestos)	4.36	5.20	6.22	7.41
Asphalt siding, on wood frame	5.85	7.22	8.90	11.00
Cement fiber (Transite), on steel frame.	7.50	9.38	11.80	14.80
Sheet siding on wood frame	6.67	8.41	10.65	13.50
Siding or shingles on wood frame	7.41	9.21	11.50	14.30
Fiberglass light panels on steel frame	6.34	7.26	8.31	9.55
sandwich panels	8.22	9.30	10.50	11.85
Heavy, FRP, over 8 oz	8.55	10.35	12.50	15.15
Light panels on wood frame	5.61	6.38	7.25	8.22
Sandwich panels	7.57	8.43	9.43	10.55
Heavy, FRP, over 8 oz	7.82	9.46	11.40	13.80
Glass panels	17.75	24.55	34.00	47.25
Projected greenhouse	42.75	51.00	61.00	72.50
Log, up to 10” diameter	18.95	25.25	33.50	44.25
Deluxe, hand–hewn or oversized	29.25	36.75	47.50	60.00
Plywood, boards or siding,				
On steel frame	7.07	9.03	11.55	14.80
On wood frame	6.34	8.13	10.50	13.50
Deduct for spaced boards	0.90	1.38	2.12	3.21
Stucco, on baled straw	18.10	21.75	26.00	31.25
Stucco, on wood frame	7.65	9.41	11.60	14.30
Synthetic plaster on rigid insul. (EIFS), on steel frame	11.50	14.15	17.45	21.35
Wire mesh on wood frame	4.61	5.57	6.69	8.06
Wood shingles on wood frame	7.99	9.89	12.20	15.15
Deduct for light farm grade panels	2.24	3.05	4.17	5.69
Deduct for shed walls without openings	0.84	1.33	2.09	3.21
Add for ext. sheathing or unfin. shed splash boards	1.30	1.58	1.92	2.31
Add for interior sheathing or liner, finished	2.24	2.76	3.39	4.20
Polylaminated panel (FRP)	3.62	4.24	4.98	5.85
Each inch of board or sheathing over 1”, add	1.80	2.06	2.33	2.64
Add for stud wall backing	0.90	1.12	1.43	1.80
Add for insulation	0.96	1.18	1.41	1.72
Vinyl faced, exposed	1.30	1.44	1.62	1.80
Rigid board, faced	1.64	2.18	2.87	3.79
Baled straw insulation	0.52	0.65	0.84	1.08
Add for air infiltration wrap	0.25	0.32	0.41	0.56

For earthen sidewalls, see Fill or Excavation costs on Page 1. For treated wood, add 10%.

Wood or Steel Stud Wall				
Aluminum or steel siding, horizontal	16.80	20.05	24.00	28.75
Sheet panels	14.90	18.00	21.80	26.25
Asphalt siding	14.90	17.70	21.10	25.00
Cement fiber siding or shingles, horizontal	16.40	19.55	23.35	28.00
Sheet, embossed	15.70	18.55	21.85	25.75
Hardboard siding or shingles, horizontal	16.25	19.30	22.80	27.00
Sheet, embossed	15.55	18.50	21.80	25.75
Plywood, textured	15.40	18.20	21.50	25.50
Deluxe, redwood, cedar, etc.	17.30	20.35	24.00	28.25
Shingles or shakes, wood	16.80	20.15	24.25	29.00
Stucco	16.80	20.05	24.00	28.75
Synthetic plaster on rigid insulation (EIFS)	19.30	23.25	28.00	33.75
Deluxe, textured or aggregate	22.95	27.50	33.25	39.75
Vinyl siding	16.80	20.05	24.00	28.75

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)

	1	2	3	4
Wood or Steel Stud Wall				
Wood siding	16.40	19.50	23.15	27.50
Deluxe, redwood, cedar, etc.	17.65	21.20	25.50	30.75
Log veneer siding	18.05	22.75	28.50	35.75
Deluxe, half round, full corners	30.50	35.00	39.75	46.00
Veneer, face block or concrete brick	20.95	24.90	29.50	35.25
Common brick	21.35	25.50	30.25	36.25
Face brick	24.60	29.00	34.50	40.50
Mortarless brick	25.00	29.25	34.50	40.25
Stone, ashlar veneer	37.25	44.50	52.50	63.50
Rubble or rustic	29.50	35.50	42.75	51.00
Synthetic veneer or panel	19.70	24.80	31.25	39.00
Thin veneer on rigid insulation	26.25	31.00	36.50	43.25
Add for sheathing	1.22	1.49	1.81	2.24
Add for seismic/wind bracing	0.67	0.82	1.00	1.23
Add for insulation	0.86	1.08	1.32	1.63
Add for air infiltration wrap	0.32	0.40	0.47	0.57
Add for air space wrap	0.87	0.99	1.09	1.23
Add for double stud walls	1.59	2.05	2.62	3.36
Add for wood stresskin sandwich panel	5.99	7.13	8.43	10.00
Deduct for single wall	6.65	7.63	8.75	10.00
MISCELLANEOUS - Apply to total square footage of lined area.				
Cold storage, insulation board	2.56	3.37	4.46	5.94
For each inch over 2", add	0.41	0.60	0.90	1.30
WALL ORNAMENTATION - Apply to ornamented area.				
Brick, split face, Roman or Norman	13.60	15.80	18.25	21.20
face, standard size	14.85	17.30	19.95	23.15
Mortarless brick	15.85	18.15	20.90	24.00
Select common	13.45	15.55	17.95	20.85
Used	14.70	16.85	19.45	22.40
Simulated veneer or panel, 1/4" - 3/8"	12.00	14.55	17.75	21.55
Thin veneer on rigid insulation	16.35	18.25	20.40	22.75
Add for pictorial carved artwork	189.00	219.00	249.00	287.00
Cement fiber siding	3.76	4.55	5.53	6.72
Concrete, ornamental cast stone	29.50	35.50	42.50	51.00
Concrete block, imitation flagstone	12.00	14.00	16.35	19.15
solar screen	12.95	15.15	17.80	20.85
Ornamented face, slump, fluted, Split or ground	13.10	15.05	17.35	19.95
Glazed one side, add	8.32	9.17	10.15	11.20
Cut stone, carved	128.00	189.00	280.00	408.00
Glass block, white or aqua	51.00	56.50	62.50	69.50
Colors or solar reflective	72.00	78.50	86.00	95.00
Granite, ashlar or panel	63.00	73.50	84.50	98.00
Limestone, ashlar or panel	46.50	54.50	63.50	74.00
Local stone, ashlar veneer or panel	40.00	47.25	55.00	65.00
rubble or rustic	28.50	34.00	41.00	49.25
Imitation precast stone	12.65	16.30	21.05	27.25
Marble panels	51.00	60.00	70.00	81.50
Metal panels, screens, louvers	22.40	28.50	36.00	45.75
Preformed metal panels	2.88	5.39	9.12	14.70
Add for curved panels	1.20	1.70	2.45	3.52
Ornamental doorways	75.00	151.00	271.00	445.00
Slate panels	44.00	51.00	58.50	67.50
Stucco	5.19	5.79	6.46	7.19
On masonry	4.08	4.61	5.22	5.91
Add for synthetic on rigid insulation (EIFS)	2.80	3.60	4.64	6.00
*Built–up (EIFS) panel relief	6.23	7.93	10.05	12.80
Terra cotta	34.50	41.00	49.00	58.50
Tile, ceramic	17.95	20.45	23.20	26.50
*Mosaics	24.80	30.00	36.50	44.00
Hand–Painted tiles	125.00	182.00	257.00	362.00

EXTERIOR WALL (Continued)

	1	2	3	4
WALL ORNAMENTATION - Apply to ornamented area.				
Vinyl siding	3.99	4.80	5.75	6.88
Vitrolite (structural glass)	28.50	33.25	39.00	45.75
Wood, plywood	3.11	3.90	4.90	6.15
Shingles	4.59	5.48	6.55	7.81
Siding	4.03	4.99	6.17	7.64
Ornamented molding or trim	12.35	17.30	24.10	33.75
Add for treated wood	0.67	0.82	1.00	1.23
*Note - For pictorial artwork, add	14.15	19.80	27.75	38.75
EXTERIOR BALCONIES - Apply to balcony area.				
Concrete	24.70	32.25	42.00	55.00
Steel	22.15	30.75	42.00	58.50
Wood	19.35	26.50	36.25	49.75
Add for ornate finishes, balustrades	20.55	26.00	33.00	41.50
BASEMENT WALL - Apply to basement wall area.				
Concrete block, reinforced, 6"	12.65	14.40	16.45	18.80
8"	14.25	16.20	18.50	21.20
12"	17.20	19.60	22.40	25.50
For each additional 4" of block, add	3.27	3.70	4.22	4.80
deduct for plain, unreinforced walls	0.62	0.85	1.17	1.60
Concrete, reinforced, 6"	15.05	17.20	19.60	22.40
8"	17.20	19.60	22.40	25.50
12"	21.20	23.95	27.00	30.50
16"	25.25	28.50	32.00	36.00
For each additional 4" of concrete, add	4.17	4.51	4.87	5.28
Deduct for plain, unreinforced walls	0.98	1.33	1.79	2.39
Masonry, brick, 8"	21.20	24.05	27.50	31.25
Stone, 12"	29.25	34.25	40.25	47.25
For each 4" variation in thickness	7.68	8.53	9.48	10.55
Wood, treated	11.20	14.35	18.40	23.65
Add for stay in place forming	0.75	1.18	1.80	2.71
Add for waterproofing	1.25	1.59	2.02	2.57
Earth sheltered structures	1.67	2.46	3.60	5.28
Add for insulation	0.98	1.35	1.90	2.64
Earth sheltered structures	1.59	2.32	3.43	5.04

For specific earth sheltered waterproofing, see UIP 1.

EXTERIOR AND BASEMENT STAIRS - Per riser. For fire escapes, see UIP 5.

Concrete	248.00	333.00	441.00	595.00
Steel pans or prefab. concrete on steel	271.00	357.00	471.00	630.00
Steel or aluminum grating	318.00	410.00	525.00	680.00
Wood	89.00	133.00	202.00	295.00

ROOF STRUCTURE - Apply to roof area. See pg. 8 for roof modifiers.

Concrete joists, slab	14.50	16.50	18.75	21.35
Lift slab	13.20	14.85	16.80	18.90
Pan or waffle slab and joists	13.35	15.15	17.10	19.25
Precast joists and deck	12.70	14.40	16.35	18.50
Precast joists, wood deck	10.15	11.45	12.95	14.65
Cored plank on bearing walls	11.25	12.80	14.55	16.50
Thin shell	20.45	24.65	29.75	35.75
Concrete dome, cast–in–place	50.50	55.50	60.00	66.00
Thin shell	33.25	36.75	41.00	45.50

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

ROOF STRUCTURE - Apply to roof area.

	1	2	3	4
Steel joists, concrete slab	16.55	19.05	22.15	25.75
Gypsum on formboard	7.23	9.51	12.45	16.40
Precast deck	14.45	16.65	19.00	21.75
Steel deck	7.57	10.10	13.50	18.10
Light-gauge truss joists	6.06	8.24	11.15	15.15
Steel deck, gypsum or concrete	10.25	13.20	17.00	21.75
Wood or composition deck	6.06	8.16	11.00	14.80
Light gauge truss joists	4.96	6.82	9.41	12.95
Open steel system for corrugated metal	3.54	5.13	7.42	10.75
Light purlin supports only for metal or fiberglass	1.79	2.27	2.90	3.71
Steel space frame and sheathing	27.00	35.00	45.75	59.00
Metal dome and cover	39.00	45.50	53.00	61.50
Wood joists, wood or composition deck	4.45	6.24	8.76	12.35
Exposed rafters, 2" T&G sheathing	7.33	9.65	12.75	16.80
Prefab. panels (exclusive of girders)	2.39	2.97	3.70	4.59
Stresskin sandwich panel (exclusive of purlins)	8.37	10.85	14.00	18.05
Add for snow roof, furred sheathing layer	2.72	3.00	3.33	3.70
Open wood system for Corrugated metal	2.48	3.84	5.92	9.03
Light purlin supports only for metal, wood or fiberglass	0.82	1.18	1.68	2.39
Wood dome and deck	25.75	31.50	38.75	47.75
Add for seismic/hurricane truss ties	0.46	0.56	0.68	0.81
Add for complex roof, turrets, ornate trim	70%	55%	45%	35%

For treated wood, increase costs by 10% to 20%.

ROOF COVER - Apply to roof area.

Aluminum or steel, corr., crimped or tile panels, Preformed light, to 26 gauge	2.31	3.08	4.11	5.51
Heavy, under 26 gauge	5.10	6.07	7.22	8.55
Formed seam, flat or standing	5.76	7.56	9.90	13.00
Batten seam	6.92	8.90	11.50	14.80
Sandwich panels, pre–engineered	9.03	12.05	16.05	21.35
Cold storage	23.80	27.75	32.25	37.25
Shingles	4.69	5.88	7.35	9.19
Aggregate finish	6.08	7.66	9.65	12.15
Thatch	22.60	25.50	28.75	32.50
Add for interior liner, metal	2.31	2.70	3.17	3.70
Plastic	2.14	2.53	2.99	3.55
Add for porcelain enamel finish	3.70	4.45	5.38	6.51
Add for stainless steel or textured (Galbestos)	4.36	5.20	6.22	7.41
Asphalt, corrugated	1.99	2.36	2.78	3.30
Atrium skylight, frame and glazing	32.50	47.25	67.00	96.50
Built–up composition	2.14	2.81	3.70	4.86
Cement fiber shingles	4.69	6.06	7.78	10.05
Corrugated or sheet (Transite)	4.11	5.35	6.97	9.03
Composition roll, mineral surface	1.22	1.52	1.89	2.31
Composition shingles, to 235#	2.14	2.52	2.95	3.45
Over 235# or laminated	2.64	3.45	4.52	5.94
Copper, flat or standing seam	14.65	17.30	20.50	24.30
Batten seam	16.00	18.70	22.05	26.00
Shingles	15.15	16.35	17.60	18.95
Elastomeric or modified bitumen, Single ply	3.62	4.94	6.75	9.19
Reinforced sheet or spray–fluid coat	6.84	8.19	9.86	11.85
Fiberglass, corrugated or sheet, light	2.31	2.81	3.43	4.20
Sandwich panels.	4.43	5.04	5.73	6.51
Heavy, FRP, over 8 oz.	4.69	6.01	7.71	9.87
Shade cover, light plastic netting	0.37	0.46	0.57	0.71
Heavy fabric or canvas	1.08	1.28	1.53	1.80

ROOF COVER (Continuation)

	1	2	3	4
Slate	9.03	11.30	14.15	17.75
Red	17.75	21.95	27.25	33.75
Composite reinforced fiber	6.51	8.07	10.05	12.50
Terne, flat or standing seam	13.50	16.15	19.30	23.05
Batten seam	14.50	17.30	20.65	24.70
Tile, clay	7.50	10.25	14.10	19.35
Concrete	6.19	7.41	8.88	10.70
Plastic or rubber	5.42	6.50	7.72	9.19
Add for custom coloring or glazing	1.61	2.05	2.61	3.30
Wood, boards or siding	2.56	3.20	3.96	4.94
Plywood sheets	1.72	2.00	2.30	2.64
Shakes	4.52	5.38	6.42	7.65
Shingle	4.11	4.94	5.92	7.07
Fiber shingles	2.64	3.29	4.10	5.10
Add for fire–resistant finish	0.71	0.87	1.06	1.30
Add for roof insulation	1.24	1.92	2.90	4.36
Earth sheltered structures	1.64	2.70	4.24	6.59
Baled straw insulation	0.55	0.72	0.97	1.30
Add for earth sheltered waterproofing	1.40	2.22	3.40	5.19

NOTE - For underroof insulation supporting structures, see Ceiling Extras on Page 3. For earthen roof cover, see Fill costs on Page 1. See UIP 13 for top dressing, sod and/or sprinklers. For specific earth–sheltered waterproofing, see UIP 1.

ROOF MODIFIERS – Use the following multipliers for sloping roofs to convert the unit costs to cost per square foot of horizontal roofed area.

	Rise	:	Run	Mult.	Rise	:	Run	Mult.
Less than	3'	:	12'	1.00	6'	:	12'	1.12
	3'	:	12'	1.03	8'	:	12'	1.20
	4'	:	12'	1.06	12'	:	12'	1.42
	5'	:	12'	1.08	15'	:	12'	1.60
					18'	:	12'	1.80

TRUSSES AND GIRDERS – Apply to area supported.

Steel trusses or longspan girders	3.21	4.05	5.14	6.51
Timber trusses	3.45	4.42	5.67	7.25
Glued, laminated trusses or girders	3.21	4.05	5.14	6.51

CANOPIES - Apply to horizontal area.

Wood frame	7.00	8.80	11.10	14.00
Steel frame	7.25	9.21	11.75	15.05

CUPOLAS - Costs are given per square foot of external surface, where no dimension shall be considered as less than 2 feet.

Wood or fiberglass	24.70	30.00	36.25	43.50
Aluminum or steel	54.50	73.50	101.00	136.00
Copper or terne	67.50	93.50	129.00	177.00
Add for weather vanes, each	287.00	610.00	1100.00	1800.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SHEDS AND FARM BUILDINGS

SECTION SEG 7
(SEGREGATED COST METHOD)

FALSE MANSARD FASCIAS - See UIP 4 Roofs.

DORMERS - See UIP 4; solar rooms and greenhouses, see UIP 11.

ARCHITECTURAL COLUMNS - See UIP 6.

FIREPLACES AND BUILT–IN APPLIANCES - See SEG 2.

MISCELLANEOUS

Range fencing	UIP 13
Personnel man–lifts	UIP 7
Water well drilling	UIP 3

COMPLETION OF BUILDING VALUATION

Contractors' overhead and profit, sales taxes, permit fees, and insurance during construction are included in the above costs. Interest on interim construction financing is also included, but not financing costs, real estate taxes, or broker's commissions.

Architects' fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers which bring the basic costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS

SECTION SEG 8
(SEGREGATED COST METHOD)

School buildings comprise a wide range of buildings, from the small neighborhood bungalow classroom to the multi-story university structure and large field house. Within each group, certain segregated costs may vary greatly.

Interior construction in most of these buildings usually can be priced very well on a square foot basis; however, in buildings such as classrooms with large open areas, it may be advisable to check by the built up cost method in UIP 2. Not included are seating, audio visual, kitchen or athletic equipment. Prices of these items may be found in UIP 12.

Stepped balconies and mezzanines should be priced separately from the building shell. Stage costs are listed separately from the other interior costs.

Miscellaneous interior additives include special items found in some buildings, which are not usually included in the general contract for the building but are a necessary part of the occupancy.

Mixed occupancies should be valued by separating the areas and pricing each occupancy individually.

Plumbing costs are given on the basis of floor area; however, it may be better in many cases to make an actual count of fixtures and price them from UIP 3.

SEGREGATED COSTS

(For explanation of the rating numbers see Introduction to SEG Method.)

EXCAVATION AND SITE PREPARATION

	1	2	3	4
Excavation, bulk (per cu. ft.)	0.50	0.66	0.90	1.21
Seismic, dry moat (per cu. ft.)	0.77	0.94	1.18	1.43
Fill (per cu. ft. of compacted earth)	0.55	0.68	0.84	1.05
Site preparation (per sq. ft. of site)	0.44	0.56	0.71	0.88

FOUNDATION - Apply to total floor area including basements, but excluding mezzanines.

Continuous Foundations:

Class A	4.20	5.40	6.96	8.96
Class B	4.34	5.54	7.11	9.10
Class C, bearing wall	3.59	4.66	6.05	7.83
Nonbearing wall	3.43	4.47	5.82	7.55
Class D, masonry veneer	3.23	4.23	5.52	7.21
Siding or stucco	2.88	3.76	4.86	6.31
Pole frame construction	2.72	3.51	4.52	5.82
Class S	2.89	3.75	4.92	6.40
Classes C, D and S light perimeter foundation for large, open shell–type Structures	1.13	1.47	1.89	2.44
Add for perimeter insulation, Ground floor area only	0.15	0.25	0.38	0.60
Earth sheltered structures	0.21	0.34	0.55	0.85
Add for seismic, base isolators	6.97	10.10	14.65	21.30
Damping devices	2.86	3.85	5.17	6.97

FOUNDATION ADJUSTMENTS - Apply to base cost used.

Add 1% for each foot of average story height over a 10' base height.
Subtract 1% for each foot of average story height under a 10' base height.

For one story buildings with foundations and footings formed and poured monolithically with floor slabs, use 70% of costs above.

Add for pilings from UIP 1. If foundations are brick or stone instead of concrete, increase costs by 20%. For concrete block, reduce costs by 8%.

FRAME - Apply to total floor area including basements, but excluding mezzanines.

Bearing walls, wood or steel floor supports only	2.17	2.55	2.97	3.50
Masonry supports only	3.08	3.63	4.28	5.04
Steel, fireproofed, Class A	22.95	28.00	34.00	41.50
Composite concrete steel, Class B.	20.30	24.15	28.75	34.00
Concrete, reinforced, Class B	19.90	24.00	29.00	34.75
Precast, post tensioned	19.00	22.55	26.75	31.75
Steel, Classes C and D	8.19	10.25	12.85	16.10
Class S	7.67	9.62	12.05	15.10
Light pre–engineered frame	4.92	6.11	7.61	9.46
Light tubular/pipe frame	3.04	3.98	5.18	6.76

FRAME (Continuation)

	1	2	3	4
Add for fireproofing	1.36	2.14	3.30	5.01
Steel columns, wood beams	5.59	7.28	9.51	12.40
Wood, A–frame construction	6.65	8.04	9.75	11.80
Laminated bents and arches	7.51	9.05	10.90	13.15
Light arch rib construction	4.70	5.79	7.16	8.82
mill–type (heavy timber) const.	7.90	9.52	11.50	13.90
Heavy timber/log construction, architectural	16.15	20.30	25.50	32.00
Post and beam construction	5.49	6.64	8.02	9.66
Light pole type construction	3.27	4.10	5.18	6.51
Add for seismic/wind bracing, Class A/B	4.61	6.63	9.56	13.80
Open Class C,D and S frames	1.19	1.51	1.92	2.44
Damping devices	1.81	2.43	3.24	4.36

FRAME ADJUSTMENTS - Apply to base cost used.

Add 3% for each foot of average story height over a 10–foot base height.
Deduct 3% for each foot under the 10–foot base.

For multistory buildings, add 2% for each story over one, aboveground, to apply against the total floor area, up to 30 stories; over 30, add 1% for each additional story. For partially framed structures, see UIP 1.

FLOOR STRUCTURE - Apply to area of described floor or mezzanine. For stepped balconies, see table below:

Asphalt on ground, including base	5.04	6.00	7.15	8.50
Concrete: on ground exclusive of vapor barrier	6.07	7.28	8.72	10.40
Stepped incline	7.97	9.44	11.20	13.25
Lift slab	16.95	19.10	21.70	24.55
Elevated flat slab and joists	19.10	21.75	24.70	28.00
Pan or waffle slab and joist	17.50	19.75	22.40	25.25
Precast joists and deck.	16.65	18.90	21.35	24.15
Precast joists, wood sheathing	12.95	14.55	16.50	18.60
Cored plank on bearing walls	14.50	16.45	18.65	21.20
Steel joists: flat slab	20.95	24.20	28.00	32.25
Corrugated deck and concrete	17.75	20.90	24.80	29.25
Cellular deck and concrete	20.55	24.65	29.50	35.25
Precast deck	18.40	20.85	23.85	27.00
Wood sheathing	10.30	13.00	16.35	20.60
Light gauge truss joists	9.09	11.55	14.65	18.65
Wood joists and sheathing	8.83	11.25	14.30	18.15
Joists and bridging only	6.75	8.86	11.65	15.25

For treated wood, increase costs by 10% to 20%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS
SECTION SEG 8
(SEGREGATED COST METHOD)

FLOOR EXTRAS - Add to floor structure costs.

	1	2	3	4
Vapor barrier	1.05	1.47	2.03	2.83
Each inch of slab on grade over 10", add	0.71	0.83	0.93	1.06
Each inch of sheathing over 1", add	1.93	2.17	2.43	2.71
Foamed concrete surfacing, 1½" - 2"	1.49	1.84	2.27	2.81
Floor insulation, add	1.09	1.34	1.65	2.03
Cold storage (ice rink)	2.27	2.84	3.57	4.46
For each inch over 2", add	0.46	0.66	0.94	1.36

STEPPED BALCONY STRUCTURES - Apply to horizontal area of balcony. Add for soffit finish, floor covering and electrical for complete balcony cost.

Wood	25.50	30.50	36.50	43.75
Concrete	34.25	39.75	45.75	53.50
Structural steel and concrete	39.00	45.50	53.00	62.00
Structural steel and wood	30.75	35.75	41.50	48.50

FLOOR COVER - Apply to area of described floor.

Access (computer) floor, on stanchions	29.50	34.50	40.50	48.00
Full classroom building floors	19.25	22.25	25.75	30.00
Asphalt tile	3.52	4.01	4.58	5.23
Bamboo, laminated plank	16.45	19.60	23.45	27.75
Block, wood, treated	10.75	12.75	15.15	17.90
Brick, common, in mortar	13.45	15.85	18.50	21.65
Brick, industrial, acidproof	25.75	32.00	39.50	48.50
Brick pavers, in concrete	15.70	18.70	22.25	26.50
Carpet and pad	4.24	6.66	10.25	15.60
Custom carpet and pad	14.60	24.40	39.00	61.00
Indoor/outdoor	3.20	4.20	5.52	7.28
Color, concrete	1.56	1.97	2.52	3.20
Cork	8.90	10.20	11.60	13.30
Diato, magnesite, etc.	11.35	13.15	15.30	17.75
Flagstone, random local stone, in concrete	21.30	25.00	29.50	34.50
Gratings, plastic	16.45	26.25	41.25	63.00
Steel or aluminum	18.35	27.25	40.50	60.00
Hardener and sealer, concrete	1.31	1.78	2.40	3.27
Heavy duty	3.02	3.68	4.49	5.48
*Hardwood	13.75	17.85	23.25	30.25
Sports/gym floors on resilient sleepers	14.90	18.10	22.05	26.75
Leather	56.50	66.00	76.50	89.00
Linoleum	5.73	6.81	8.10	9.64
Marble or granite	39.00	54.00	75.00	103.00
Cast tile	23.45	27.50	32.25	37.50
Melamine laminated tile or sheet	5.07	6.84	9.24	12.50
Deluxe	11.60	13.50	15.85	18.50
Plastic tile, interlocking	10.95	12.10	13.40	14.90
Rubber fabric tile	14.95	17.40	20.25	23.55
Rubber tile or sheet	6.63	8.99	12.20	16.60
Seamless plastic, epoxy, urethane, neoprene, 1/32" - 1/16" thincoat	6.13	7.59	9.37	11.60
1/8" - 3/8"	9.71	12.10	15.05	18.70
Add for colored chips or glitter	2.70	3.30	4.04	4.91

FLOOR COVER (Continuation)

	1	2	3	4
Slate, grouted	24.40	28.50	33.50	39.00
Softwood	10.40	12.40	14.70	17.55
Stone Plank	22.30	27.00	33.00	40.25
Synthetic sports surfacing	12.00	14.80	18.20	22.30
Terrazzo (exclusive of base slab)	17.10	21.00	25.75	31.75
tile	31.00	35.50	41.00	46.75
Tile, ceramic or quarry	17.10	21.35	26.75	33.50
Custom tile	38.25	46.00	55.00	66.50
*Wood over concrete, hardwood	15.85	20.15	25.75	32.75
Parquet block, prefinished, In mastic	15.05	20.55	28.25	38.25
Softwood	12.05	14.20	16.70	19.65
Vinyl composition tile or sheet	3.27	4.17	5.33	6.79
Vinyl sheet	5.48	7.47	10.20	13.85
Vinyl tile	5.88	8.40	12.00	17.25
*Add for custom wood floors	10.30	20.65	36.25	59.00
Add for pictorial artwork	15.45	21.60	30.25	42.25

Add 15% for conductive floor coverings.

For pool decking, see Section 66.

CEILING - Apply to area of described ceiling. To convert costs to floor area for high–pitched ceilings, use the roof slope multipliers on Page 9.

Acoustic ceilings, tile or panels: metal panels, incl. pads & suspension system	11.10	13.80	17.15	21.35
Clean room panels, incl. suspension system	17.75	19.50	21.45	23.55
Mineral fiber, fiberglass, panels only	2.53	3.57	5.05	7.12
Organic fiber, wood or cane, panels only	3.11	3.57	4.13	4.74
Embossed metal	9.38	12.50	16.80	22.40
Fiber sports court panel with suspension system	8.99	10.90	13.20	16.05
Gypsum board, taped and painted	3.02	3.39	3.80	4.24
Spray on texture	2.95	3.23	3.52	3.85
Mirror faced panels	30.00	33.00	36.50	40.50
Paint or stain, bottom of roof or floor	1.06	1.37	1.78	2.28
Plaster on lath: acoustical	6.38	7.15	8.03	8.99
Spray on, thincoat with texture on Lath or drywall	4.42	4.91	5.45	6.06
Standard, add 20% for Keene's	5.48	6.20	7.01	7.94
Add for metal lath	0.83	0.96	1.13	1.31
Plaster on masonry soffit: acoustical	5.32	6.00	6.75	7.62
Spray on, thincoat with texture	3.59	3.92	4.27	4.66
Standard, add 24% for Keene's	4.49	5.10	5.78	6.54
Plaster panels, decorative, panels only	20.65	22.85	25.25	28.00
Plastic panels, with suspension system, but excluding lighting	10.45	12.45	14.90	17.75
Plywood (softwood) or hardboard panels	5.20	5.94	6.77	7.73
Hardwood	7.41	8.89	10.70	12.85
Coffered or vaulted panel with molding	15.75	21.60	29.50	40.75
Custom woods, site–built	38.75	46.00	54.00	64.00
Polylaminated panels (FRP)	4.99	5.50	6.07	6.70
Insulated panel	7.37	8.29	9.34	10.55
Wood, board or T&G, softwood	5.05	5.82	6.71	7.73
Hardwood	8.14	9.45	11.00	12.80
Carved, decorative	14.20	20.70	30.25	44.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS

SECTION SEG 8
(SEGREGATED COST METHOD)

CEILING EXTRAS - Add to ceiling costs. For special ornamentation, see UIP 2.

	1	2	3	4
Ceramic tile, add	21.20	27.00	34.00	43.00
Custom tile, decorative.	43.75	53.00	63.50	76.50
Custom papers, stenciling, staff, add	20.85	28.00	37.50	51.00
Border or coving only	5.16	6.54	8.31	10.55
Ext. decorating, custom plaster, terra cotta, add	58.00	73.50	93.00	117.00
Wood furring	1.53	1.89	2.34	2.85
Metal furring	2.27	2.86	3.59	4.54
If ceiling structure which is not part of the roof or floor structure is required, add	2.36	2.95	3.71	4.63
Suspended ceiling, metal suspension sys. add	2.20	2.76	3.45	4.30
Fiberglass, FRP	3.52	4.15	4.91	5.79
Hardwood, decorative	6.15	8.42	11.55	15.75
For seismic supports, add	0.38	0.50	0.62	0.78
Ceiling insulation, add	1.09	1.37	1.74	2.20
Vinyl faced, exposed	1.53	1.75	2.03	2.36
Add for underdeck supporting bands	0.50	0.59	0.69	0.84
Rigid board, faced	2.18	2.86	3.76	4.92

For ceiling domes, see stained glass, Page 7.

INTERIOR CONSTRUCTION - Apply to total floor area. See UIP 2 for detailed costs.

Add or deduct 5% for each foot of variation from the 10–foot average story height. Add for fixed seating from UIP 12 and pools from UIP 13, or see Miscellaneous costs below.

FRAME INTERIOR PARTITIONS

Administration Building	30.25	39.50	51.50	66.50
Bookstores	16.00	22.00	30.25	42.00
Day–care centers	37.75	44.00	52.00	61.00
Field houses	7.61	16.40	29.75	49.50
Gymnasiums (excluding pools)	21.80	29.00	38.25	51.00
Libraries (excl. book stacks), academic, college	38.75	46.00	54.50	65.00
Elementary and secondary (media centers)	30.50	36.25	43.00	51.00
Maintenance buildings	0.47	0.82	1.36	2.14
Natatoriums (excluding pools)	25.00	28.75	33.00	38.25
Physical education (excluding pools)	27.75	36.25	47.25	62.50
Restroom buildings	35.50	43.75	53.50	66.00
Shower room buildings	42.75	46.00	49.00	52.50
Schools, elementary: entire school	46.00	55.50	67.50	81.50
secondary; intermediate	47.25	51.00	55.50	60.00
High schools	45.50	50.50	56.50	63.50
Alternative schools	38.75	48.50	60.50	75.50
Classrooms	37.75	43.00	48.75	55.00
Laboratory (excluding equip.)	39.75	47.25	56.50	67.00
Lecture (excluding fixed seating)	36.25	44.00	54.00	66.00
Special education	39.00	47.00	57.00	69.00
Fine arts	39.00	45.50	52.50	61.00
Manual arts	26.00	31.00	37.25	44.50
Multipurpose	33.50	39.75	46.50	55.00

FRAME INTERIOR PARTITIONS (Continuation)

	1	2	3	4
Schools, college level:				
Entire school	53.50	64.00	76.00	91.00
Arts and crafts	35.25	46.00	60.00	77.50
Classrooms	44.75	52.00	60.00	69.50
Commons	56.50	68.50	82.50	99.50
Lecture halls (excluding fixed seating)	43.25	49.00	55.00	62.50
Science buildings (excluding fixed equipment)	40.25	42.75	45.50	48.00
Technical trades	26.75	32.50	39.75	48.75
Schools, vocational: entire school	31.50	37.75	44.50	52.50

MASONRY INTERIOR PARTITIONS

Administration buildings	33.25	43.00	55.00	70.50
Bookstores	18.00	24.45	33.00	45.00
Day–care centers	40.75	47.50	55.00	65.00
Field houses	8.79	18.15	32.25	53.50
Gymnasiums (excluding pools)	24.15	31.75	41.75	54.50
Libraries (excl. book stacks), academic, college	41.75	49.25	58.50	69.00
Elementary and secondary (media centers)	33.25	39.25	46.50	54.50
Maintenance buildings	0.56	0.97	1.57	2.45
Natatoriums (excluding pools)	27.75	31.75	36.50	41.50
Physical education (excluding pools)	30.50	39.75	51.00	66.00
Restroom buildings	39.00	47.25	57.50	70.50
Shower room buildings	46.50	49.25	53.00	56.00
Schools, elementary: entire school	49.25	59.50	71.50	86.50
secondary; intermediate	51.00	55.00	59.00	64.00
High schools	49.00	54.00	60.00	67.00
Alternative schools	41.75	52.00	64.00	80.00
Classrooms	41.00	46.50	52.00	58.50
Laboratory (excluding fixed equipment)	43.25	51.00	60.00	71.00
Lecture (excluding fixed seating)	39.25	47.50	57.50	69.50
Special education	42.25	51.00	60.50	73.00
Fine arts	42.50	49.00	56.00	65.00
Manual arts	28.75	34.00	40.25	48.00
multipurpose	36.75	43.00	50.00	58.50
Schools, college level:				
Entire school	57.00	67.50	80.00	96.00
Arts and crafts	38.50	49.75	63.50	82.00
Classrooms	48.25	55.00	64.00	73.50
Commons	60.50	73.00	86.50	104.00
Lecture halls (excluding fixed seating)	47.25	53.00	59.00	66.50
Science buildings (excluding equipment)	44.00	46.50	49.00	52.00
Technical trades	29.50	35.75	43.25	52.50
Schools, vocational: entire school	34.50	40.75	48.00	56.00

BALCONIES - Apply to open balcony or mezzanine area. (Cost of miscellaneous items such as rail, stairs, etc.)

	4.91	5.69	6.57	7.62

STAGES AND PERMANENT STAGE FIXTURES - Apply to stage area.

Live performance	82.00	97.00	116.00	139.00
Practice only (band)	40.25	50.50	63.50	80.50
Speaker's platform	25.25	32.00	40.25	51.00

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS
SECTION SEG 8
(SEGREGATED COST METHOD)

STORAGE VAULTS - Per square foot of vault area, excluding doors. Add or deduct 2% for each foot of height variation from the 10 foot standard. For more detailed costs see UIP 2.

	1	2	3	4
Record storage	100.00	111.00	124.00	138.00
Modular vault systems, insulated/ record storage	66.50	82.00	100.00	123.00

MISCELLANEOUS - Apply to total square footage of building area, if required. These costs vary greatly, and the following typical cost ranges should be used with caution. Built–in equipment which is normally included under the general contract is included in the interior construction costs.

College commons kitchen equipment	10.95	13.15	15.85	19.00
Lecture halls, fixed seating	2.14	2.68	3.39	4.24
Library equipment, bookstacks, etc.	17.90	24.80	34.50	48.00
Natatoriums, swimming pools	20.85	29.25	41.25	58.00
Science, fixed laboratory equipment	20.85	27.25	35.75	46.75

SPRINKLERS - Apply to sprinklered area. Costs include all piping and connections to main for light–hazard occupancies but do not include tanks. For double–sprinkler systems with heads both above and below a ceiling, use sprinklered area and 1.6 times the listed cost.

3,000 square feet	5.22	6.69	8.55	10.95
5,000	4.85	6.16	7.82	9.93
10,000	4.36	5.48	6.92	8.69
15,000	4.10	5.13	6.42	8.04
20,000	3.89	4.86	6.08	7.62
30,000	3.67	4.57	5.69	7.06
50,000	3.40	4.20	5.19	6.41
75,000	3.23	3.95	4.85	5.94
100,000	3.08	3.76	4.58	5.60
125,000	2.96	3.61	4.42	5.39
150,000	2.90	3.52	4.27	5.19
200,000	2.78	3.36	4.07	4.91
250,000	2.68	3.24	3.90	4.71
300,000	2.59	3.12	3.77	4.54
400,000	2.49	2.98	3.58	4.30
500,000	2.40	2.89	3.45	4.13

PLUMBING - Apply to total floor area or use UIP 3 for cost per fixture. The following costs represent typical ranges only.

Administration buildings	6.82	11.00	17.15	26.50
Bookstores	5.23	7.59	11.00	15.90
Day–care centers	8.47	12.50	18.40	27.00
Field houses	3.34	8.03	15.05	25.50
Gymnasiums	9.46	12.90	17.70	24.15
Libraries, academic, college	6.98	10.55	15.90	23.95
Elementary and secondary (media centers)	7.72	10.65	14.70	20.35
Maintenance buildings	0.77	1.15	1.68	2.48
Natatoriums	11.35	15.25	20.55	27.50
Physical education	10.55	14.25	19.35	26.25
Restroom buildings	26.50	35.75	48.25	65.00
Shower room buildings	38.25	46.00	55.00	66.50
Shower/locker room buildings	15.10	21.20	29.75	41.50
Schools, elementary: entire school	9.28	13.20	18.85	27.00
secondary; intermediate	8.87	12.65	18.05	25.75

PLUMBING (Continuation)

	1	2	3	4
High schools	10.25	14.20	19.80	27.50
Alternative schools	9.58	13.70	19.65	28.25
Classrooms	8.22	12.15	17.95	26.50
Laboratory	9.59	14.45	21.80	32.75
Lecture	9.06	12.65	17.75	24.80
Special education	9.31	13.50	19.60	28.25
Fine arts	7.82	11.50	17.00	25.00
Manual arts	8.13	11.90	17.45	25.75
Multipurpose	8.93	13.05	19.25	28.25
Schools, college level: entire school	8.10	12.90	20.05	30.75
Arts and crafts	8.44	12.15	17.45	25.25
Classrooms	8.88	13.25	19.90	29.75
Commons	10.20	14.30	20.05	28.00
Lecture halls	7.82	11.25	16.20	23.45
Science buildings	11.95	19.30	30.25	46.50
Technical trades	8.27	12.10	17.70	25.75
Schools, vocational: entire school	9.13	13.50	20.05	29.50

HEATING, COOLING AND VENTILATING - Apply to total floor area. Add or deduct 3% for each foot of variation in average story height from a 10 foot base.

Costs are given for gas fired heating surfaces. Add or deduct as follows for other fuels.

Oil fired +7% Coal, stoker +7% Coal, hand fired -2%

For College Science Buildings use costs on CAL 315.

Heating Only				
Electric cable or baseboard	6.41	8.71	11.85	16.20
Radiant panels	6.04	7.29	8.77	10.60
Electric wall heaters	2.80	3.34	4.04	4.85
Forced air	6.98	9.64	13.35	18.50
Hot water, baseboard or radiators	11.80	15.55	20.40	27.00
Radiant floor	11.50	15.40	20.50	27.25
Radiant heat, gas, suspended	2.31	3.24	4.52	6.34
Space heaters, gas, with fan	1.75	2.56	3.76	5.48
Steam coil, with boiler	3.34	4.41	5.79	7.62
Without boiler	2.31	3.23	4.48	6.23
Add for fanjet duct distribution	0.65	0.85	1.13	1.49
Steam radiator, with boiler	10.85	14.15	18.50	24.15
Without boiler	9.37	12.45	16.60	22.05
Wall or floor furnace	2.86	3.45	4.15	5.02
Heating and Cooling				
Zoned A.C., hot and chilled water	27.50	34.00	42.25	52.50
warm and cooled air	17.90	22.10	27.25	33.75
Package heating and cooling, short ducts	9.86	12.75	16.50	21.30
Heat pump system	12.15	16.80	23.20	32.00
Add for ground loop heat source	6.04	7.09	8.31	9.74
Individual thru wall heat pumps	4.85	6.48	8.66	11.60
Cooling Only				
Evaporative coolers	4.54	5.32	6.19	7.25
Refrigerated air conditioning only, zoned system	9.74	12.25	15.40	19.35
Package unit, short ducts	7.25	8.90	10.95	13.45
Ventilation only, with ducts and blowers	1.87	2.50	3.33	4.45

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS

SECTION SEG 8
(SEGREGATED COST METHOD)

ELECTRICAL AND LIGHTING - Apply to total floor area.

	1	2	3	4
Few Outlets:				
Nonmetallic	7.81	9.72	12.15	15.15
Armored cable (BX)	9.36	11.65	14.55	18.20
Flexible conduit	11.20	14.00	17.55	21.90
Rigid conduit	13.45	16.80	21.00	26.25
Average Number of Outlets:				
Nonmetallic	10.90	13.60	16.95	21.15
Armored cable (BX)	13.25	16.65	20.75	26.00
Flexible conduit	16.15	20.25	25.50	32.00
Rigid conduit	19.65	24.75	31.25	39.50
Many Outlets:				
Nonmetallic	15.25	19.00	23.65	29.50
Armored cable (BX)	18.80	23.55	29.50	37.25
Flexible conduit	23.15	29.25	36.75	46.75
Rigid conduit	28.75	36.50	46.50	59.00
Unfinished Areas:				
Nonmetallic	3.06	3.57	4.15	4.85
Armored cable (BX)	3.59	4.18	4.86	5.67
Flexible conduit	4.26	4.94	5.75	6.67
Rigid conduit	5.02	5.83	6.78	7.90
Typical costs for some occupancies.				
Administration buildings	12.75	19.10	28.50	42.75
Bookstores	12.15	16.60	22.60	31.00
Day–care centers	10.40	17.70	28.50	44.50
Field houses	6.92	13.70	23.85	39.00
Gymnasiums	8.09	13.00	20.40	31.50
Libraries, academic, college	20.65	28.25	38.75	52.50
elementary and secondary (media centers)	14.05	19.35	26.75	36.50
Maintenance buildings	3.26	4.76	6.94	10.10
Natatoriums	11.50	17.25	25.75	38.75
Physical education	12.70	17.70	24.70	34.25
Restroom buildings	9.36	15.60	24.95	39.00
Shower room buildings	7.26	11.70	18.40	28.25
Schools, elementary: entire school	14.80	20.40	28.25	38.75
secondary; intermediate	15.05	20.05	26.75	35.50
High schools	16.95	22.45	29.75	39.75
Alternative schools	17.95	23.95	32.00	42.25
Classrooms	15.05	21.05	29.50	41.25
Laboratory	16.50	25.50	38.75	58.50
Lecture	16.45	24.40	36.25	54.00
Special education	16.35	24.75	37.25	56.00
Fine arts	14.25	19.95	28.00	39.00
Manual arts	13.35	18.35	25.25	34.50
Multipurpose	13.15	18.35	25.50	35.25
Schools, college level: entire school	14.80	21.60	31.50	45.75
Arts and crafts	15.40	22.90	34.00	51.00
Classrooms	14.30	21.20	31.50	46.50
Commons	13.05	19.50	29.25	43.50
Lecture halls	14.90	23.70	36.75	56.50
Science buildings	16.35	24.30	36.25	54.00
Technical trades	15.60	21.15	28.75	39.00
Schools, vocational: entire school	15.75	22.70	32.75	47.25

EXTERIOR WALL - Apply to total wall area.

Concrete or Masonry Walls	1	2	3	4
Adobe or hollow clay block, 6”	32.75	36.75	41.00	45.75
8”	35.50	39.75	44.75	50.00
12”	40.00	45.00	50.50	56.50
14”	44.25	49.75	56.00	62.50
Adobe block, grouted or cavity, 22” - 24”	51.00	57.50	65.00	73.00
30” - 32”	55.50	61.50	69.00	78.00
Block, concrete, 6”	29.00	32.25	36.00	40.00
8”	31.00	34.75	38.50	43.00
12”	35.25	39.25	43.50	48.75
16”	39.25	44.00	49.00	54.50
For each additional 4” of block, add	4.22	4.73	5.28	5.88
Block, grouted or cavity, 10” - 12”	33.25	37.00	41.00	45.75
*Add for ornamented face block	2.00	3.06	4.68	7.08
Brick, block backup, 8”	37.00	41.75	46.50	52.00
12”	41.50	46.00	52.00	58.00
16”	45.75	51.00	57.50	64.00
Brick common, 8”	42.25	46.50	52.00	57.50
12”	50.50	56.00	62.00	69.00
16”	58.50	65.00	72.00	80.00
For each additional 4” of brick, add	8.35	9.25	10.30	11.40
Brick, grouted or cavity, reinforced, 9” - 10”	45.50	51.00	56.50	63.00
Block backup, 9” - 10”	41.50	45.75	51.00	57.00
Block backup, 12” - 14”	45.00	50.50	56.50	63.00
Brick, 6” SCR modular	31.75	35.75	40.00	45.00
8”	35.25	39.25	44.00	49.00
*Add for face brick	4.66	5.06	5.52	6.01
Concrete, reinforced, formed, 4”	32.75	36.50	40.75	45.50
6”	35.25	39.25	43.50	48.75
8”	37.50	41.75	46.50	52.00
12”	42.50	46.75	52.00	58.00
For each additional 4” of concrete, add	4.90	5.38	5.91	6.50
Precast panels, 2”	26.75	30.00	33.50	37.50
4”	28.50	32.00	35.75	39.75
6”	31.25	35.00	39.00	43.50
8”	34.75	38.25	42.50	47.50
12”	40.00	44.25	49.25	54.50
Tilt–up panels, 4”	27.00	30.25	34.00	38.25
6”	29.00	32.50	36.75	41.00
8”	31.25	35.25	39.75	44.25
10”	33.50	37.75	42.50	48.25
12"	36.00	40.75	46.00	52.00
Add for insulated sandwich	2.41	3.03	3.82	4.81
Add for brick or tile inserts	9.01	11.25	14.05	17.45
Glass block, white or aqua	72.00	76.50	81.50	86.00
Colors or reflective	96.00	100.00	106.00	112.00
Local stone, block backup, Ashlar veneer, 12”	68.00	77.00	86.50	98.00
Rubble or rustic, veneer, 12”	54.50	62.50	71.50	82.00
For each 4” variation in thickness	4.42	4.79	5.20	5.62

***NOTE:** The additional cost for face block or brick is the difference between the cost of face block or brick and standard block or common brick in place as part of a wall. For the cost of ornamented, face or synthetic masonry veneer, see Wall Ornamentation on page 7.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS
SECTION SEG 8
(SEGREGATED COST METHOD)

EXTERIOR WALL - Apply to total wall area.

Concrete or Masonry Walls	1	2	3	4
Local fieldstone, in mortar, 12”	49.00	54.50	61.50	68.50
For each 4” variation in thickness	3.92	4.67	5.55	6.57
Local stone, rough cut, solid, 12”	70.00	86.00	105.00	128.00
Granite	73.50	93.50	120.00	153.00
Limestone	78.50	96.00	117.00	142.00
For each 6” variation in thickness	31.75	37.75	45.00	53.50
Rammed earth, soil cement, 24”	36.75	42.25	48.00	54.50
pneumatic build–up, formed				
One side	56.00	63.00	70.50	78.50
for each 6” variation in thickness	2.08	2.39	2.77	3.20
Tile, structural clay, 6”	30.75	34.75	39.00	44.00
10”	36.00	40.25	45.50	51.00
Concrete or Masonry Wall Extras				
Add for stay in place forming	1.74	2.29	2.98	3.91
Add for glazed block or tile,				
each side	9.47	10.60	11.85	13.25
Add for pilasters	1.84	2.23	2.68	3.23
Add for bond beams	1.93	2.31	2.75	3.30
Add for seismic reinforcement	0.79	1.25	1.97	3.03
Add for synthetic plaster on rigid				
insulation (EIFS)	7.47	9.17	11.25	13.80
deluxe textured or aggregate	12.10	14.55	17.45	20.90
Add for thin masonry on rigid				
insulation	18.75	20.95	23.55	26.50
Add for clay tile backup in lieu				
of block	3.20	3.76	4.44	5.22
Add for earth sheltered				
waterproofing	1.43	2.18	3.32	5.02
Add for insulation	1.18	1.69	2.38	3.36
earth sheltered structures	1.99	2.87	4.14	5.98

Buttresses - Apply to cubic footage of buttress wall area.

Concrete	35.50	39.75	44.25	49.75
Masonry	41.00	45.00	49.75	54.50
Local stone, ashlar veneer	76.50	84.50	93.00	103.00
rubble or rustic veneer	56.00	64.00	73.00	83.00
Rough cut, solid, local stone	64.50	76.50	90.00	107.00
Granite	68.00	84.50	105.00	130.00
Limestone	70.50	83.50	99.50	118.00
Curtain Walls				
Brick or tile panels	38.00	46.00	55.00	66.50
Concrete and glass panels, precast	47.25	54.50	63.50	73.50
glass fiber reinforced, molded	40.50	49.75	61.00	75.00
Metal and glass panels (ordinary)	52.50	62.00	73.50	86.00
Stainless steel or bronze and glass	75.00	87.00	102.00	118.00
Stone panels, local stone	67.50	75.00	83.00	92.00
Granite	74.50	84.50	96.50	110.00
Limestone or slate	70.50	77.50	85.50	94.50
Marble	70.50	81.00	92.00	105.00
Composite or aggregate panels	48.50	60.00	75.00	93.00
Structural glazed atrium				
including supports	120.00	162.00	217.00	290.00
Steel studs and stucco	27.50	32.25	38.25	45.00
synthetic plaster on rigid insulation				
(EIFS)	32.00	38.25	46.00	55.00
Deluxe textured or aggregate	37.25	44.50	53.00	63.00
Wood or aggregate board siding	28.50	35.25	43.25	53.50
Add for insulation, insulated				
area only	1.56	2.25	3.27	4.74

EXTERIOR WALL (Continued)

	1	2	3	4
Pre–engineered Walls				
Sandwich panels, aluminum or steel,				
both sides	31.25	36.00	41.50	48.00
Cold storage, metal both sides	37.50	42.25	47.25	53.00
Cement fiber or shotcrete,				
Two sides	24.25	29.00	34.50	41.25
Fiberglass panels, two sides	31.25	36.75	43.00	51.00
Glass exterior, metal interior	35.25	40.50	46.50	53.00
Add for stainless steel or				
textured (Galbestos)	4.99	5.94	7.07	8.41
Add for polylaminated (FRP) interior	1.31	1.62	1.99	2.46
Deduct for gypsum or				
hardboard interior	2.21	2.40	2.62	2.86
Prefabricated building panels				
Aluminum or steel and glass panels	41.25	45.00	49.25	54.00
Add for porcelain enamel finish	4.19	4.97	5.91	7.00
Add for block backup	8.46	9.55	10.75	12.15
Stucco on steel panel	46.50	51.00	56.00	61.00
Veneer, block or brick,				
On steel panel	54.00	59.50	66.50	73.00
Stone, rubble or rustic	66.50	72.00	79.00	86.50
Single–Wall Construction				
Aluminum or steel on steel frame	11.80	14.25	17.25	20.85
On wood frame	10.90	13.25	16.05	19.55
Add for porcelain enamel finish	4.26	5.08	6.04	7.19
Add for stainless steel or				
Textured (Galbestos)	4.89	5.80	6.88	8.15
Cement fiber (Transite), on				
steel frame	13.25	16.15	19.60	23.80
Sheet siding on wood frame	12.15	14.80	18.10	22.15
Siding or shingles on wood frame	13.00	15.85	19.15	23.20
Fiberglass light panels on steel frame	9.06	10.30	11.65	13.20
sandwich panels	10.85	11.85	13.00	14.20
Heavy, (FRP), over 8 oz.	13.95	16.30	18.95	22.10
Light panels on wood frame	8.09	9.10	10.30	11.60
sandwich panels	9.71	10.60	11.55	12.55
Heavy, (FRP), over 8 oz.	12.75	14.95	17.60	20.65
Glass panels	34.25	43.75	56.00	71.00
Projected greenhouse	73.50	82.00	90.50	101.00
Log, up to 10” diameter	29.00	37.50	48.50	63.00
Deluxe, hand hewn or oversized	43.00	53.50	65.50	81.00
Plywood, boards or siding,				
On steel frame	11.90	14.15	16.95	20.20
On wood frame	11.00	13.20	15.70	18.85
Stucco, on baled straw	24.15	29.00	34.50	41.25
Stucco, on wood frame	12.05	13.95	16.15	18.65
Synthetic plaster on rigid insul.				
(EIFS), on steel frame	17.45	20.40	23.85	28.00
Wood shingles, on wood frame	12.90	15.00	17.40	20.35
Add for exterior sheathing, per layer	1.81	2.05	2.34	2.67
Add for interior sheathing or liner,				
finished.	3.09	3.64	4.29	5.07
Polylaminated panel (FRP)	4.17	4.91	5.78	6.79
Add for stud wall backing	1.16	1.37	1.65	1.96
Add for insulation	1.09	1.33	1.59	1.92
Vinyl faced, exposed	1.46	1.61	1.78	1.96
Rigid board, faced	1.87	2.45	3.18	4.14
Add for air infiltration wrap	0.31	0.40	0.52	0.65

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS

SECTION SEG 8
(SEGREGATED COST METHOD)

EXTERIOR WALL (Continued)	1	2	3	4
Wood or Steel Stud Walls				
Aluminum or steel siding, horizontal	24.15	28.00	32.50	38.00
Sheet panels	21.95	25.75	30.00	35.25
Asphalt siding	21.05	24.30	28.00	32.25
Cement fiber siding or shingles, Horizontal	23.65	27.50	32.00	37.25
Sheet, embossed	22.05	25.25	29.25	33.50
Hardboard siding or shingles, horizontal	22.90	26.25	30.25	34.75
Sheet, embossed	21.80	25.00	28.75	33.00
Plywood, textured	21.95	25.25	29.00	33.50
Deluxe, redwood, cedar, etc.	24.45	28.25	32.50	37.75
Shingles or shakes, wood	24.95	29.00	33.75	39.50
Stucco	23.95	27.75	32.25	37.50
Synthetic plaster on rigid insulation (EIFS)	28.25	32.75	38.25	44.50
Deluxe, textured or aggregate	33.25	38.75	45.25	52.50
Vinyl siding or shingles	24.00	27.75	32.25	37.50
Wood siding	23.75	27.25	31.50	36.25
Deluxe, redwood, cedar, etc.	26.25	30.50	35.50	41.25
Log veneer siding	26.25	32.50	40.25	49.75
Deluxe, half round, full corners	45.25	48.50	52.00	56.00
Veneer, face block or concrete brick	29.75	34.25	39.50	45.25
Common brick	30.25	35.00	40.50	46.75
Face brick	34.25	39.50	45.25	52.50
Mortarless brick	34.75	39.75	45.25	51.50
Stone, ashlar veneer	53.50	62.00	71.50	82.50
Rubble or rustic	42.75	49.75	58.00	67.00
Synthetic veneer or panel	31.25	37.50	45.25	55.00
Thin veneer on rigid insulation	36.75	42.25	48.50	55.50
Add for sheathing	1.40	1.69	2.05	2.49
Add for seismic/hurricane bracing	0.77	0.93	1.09	1.31
Add for insulation	1.02	1.22	1.46	1.74
Add for air infiltration wrap	0.32	0.41	0.53	0.66
Add for air space wrap	1.05	1.19	1.34	1.53
Add for double–stud walls	2.21	2.65	3.20	3.85
Add for wood stresskin sandwich panels	6.58	7.77	9.16	10.85

BASEMENT WALLS - Apply to basement wall area				
Concrete block, reinforced, 6”	16.15	18.25	20.55	23.00
8”	18.25	20.55	23.00	25.75
12”	22.35	25.00	28.00	31.50
For each additional 4” of block, add	4.12	4.61	5.17	5.82
Concrete, reinforced, 6”	19.45	21.85	24.65	27.75
8”	22.00	24.65	27.75	31.00
12”	26.50	29.75	33.50	37.50
16”	31.50	35.00	39.00	43.50
For each additional 4” of concrete, add	4.84	5.27	5.78	6.28
Masonry, brick, 8”	27.25	30.50	34.25	38.50
Stone, 12”	38.50	44.25	51.00	58.50
For each 4” variation in thickness	8.23	9.09	10.05	11.15
Wood, treated	16.00	19.65	24.10	29.50
Add for stay in place forming	1.00	1.47	2.15	3.14
Add for waterproofing	1.55	1.92	2.36	2.92
Earth sheltered structures	1.89	2.78	4.11	6.06
Add for insulation	1.16	1.65	2.33	3.31
Earth sheltered structures	1.81	2.67	3.93	5.80

For specific earth sheltered waterproofing, see UIP 1.

EXTERIOR, BASEMENT AND TOWER STAIRS - Per Riser. Fire escapes, see UIP 5.	1	2	3	4
Concrete	293.00	401.00	550.00	750.00
Steel pans or prefab. concrete on steel	317.00	424.00	570.00	775.00
Steel or aluminum grating	371.00	486.00	635.00	825.00
Wood	113.00	172.00	264.00	399.00

WALL ORNAMENTATION - Apply to ornamented area.				
Brick, split face, Roman or Norman	16.30	18.85	21.80	25.25
face, standard size	17.70	20.65	23.95	27.75
Mortarless brick	18.95	21.60	24.70	28.25
Select common	15.75	18.25	21.20	24.55
Used	17.30	19.90	23.00	26.50
Simulated veneer or panel, 1/4” - 3/8”	14.05	17.15	21.05	25.75
Thin veneer on rigid insulation	18.85	21.05	23.50	26.25
Add for pictorial carved artwork	231.00	262.00	301.00	340.00
Cement fiber siding	4.58	5.51	6.62	7.94
Concrete, ornamental cast stone	36.00	43.00	51.50	62.00
Concrete block, imitation flagstone	14.35	16.85	19.75	23.15
Solar screen	15.40	18.05	21.20	24.95
Ornamented face, slump, fluted, Split or ground	15.40	17.75	20.55	23.80
Glazed one side, add	9.46	10.55	11.75	13.15
Cut stone, carved	147.00	214.00	312.00	454.00
Glass block, white or aqua	58.00	64.00	71.00	78.00
Colors or solar reflective	80.50	87.50	96.00	105.00
Granite, ashlar or panel	74.50	86.00	100.00	116.00
Limestone, ashlar or panel	55.00	64.50	76.00	89.00
Local stone, ashlar veneer or panel	48.00	56.00	66.00	77.50
Rubble or rustic	35.25	42.00	50.50	60.50
Imitation precast stone	16.60	21.45	27.75	36.00
Marble, panels	61.00	72.00	84.00	98.50
Metal panels, screens, louvers	26.25	34.50	45.25	59.50
Preformed wall panels.	5.07	9.21	15.40	24.70
Add for curved panels	1.47	2.08	2.95	4.17
Ornamental doorways	102.00	197.00	340.00	550.00
Slate, panels	52.00	60.00	70.00	81.00
Stucco	5.55	6.34	7.19	8.16
On masonry	4.49	5.16	5.91	6.79
Add for synthetic on rigid Insulation (EIFS)	3.77	4.82	6.14	7.84
*Built–up (EIFS) panel relief	7.84	10.05	12.90	16.60
*For pictorial artwork, add	16.20	22.75	32.00	45.00
Terra Cotta	41.50	49.75	59.00	70.50
Tile, ceramic	20.90	23.85	27.25	31.00
*Mosaics	30.50	36.75	44.50	54.00
Hand painted tiles	162.00	224.00	317.00	448.00
Vinyl siding	5.23	6.20	7.38	8.74
Vitrolite (structural glass)	33.50	39.50	46.50	55.00
Wood, plywood	3.50	4.56	5.94	7.73
Shingles	5.20	6.35	7.79	9.52
Siding	5.05	6.25	7.74	9.59
Ornamented molding or trim	14.70	20.80	29.50	41.50
Add for treated wood	0.70	0.89	1.10	1.39
*Note - For pictorial artwork, add	16.05	22.75	32.25	45.75

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS
SECTION SEG 8
(SEGREGATED COST METHOD)

STAINED GLASS - Apply to art glass for window, dome or skylight area. These costs vary greatly, and the following typical cost ranges should be used with caution. See UIP 6 for details. For residential straight seams or simple bevel, deduct 50% from the Low Cost. For ceiling domes, use low cost range for plastic, average for stock glass and high cost for custom stained glass.

	1	2	3	4
Low cost, plain, min. work or detailed bevel etched	108.00	147.00	197.00	268.00
Average, simple figures and scenes	340.00	463.00	625.00	840.00
High cost, highly detailed work (including domes)	705.00	985.00	1390.00	1960.00

MISCELLANEOUS - Apply to total square footage of lined area if required.

Metal shielding, radio frequency	36.00	49.00	66.50	90.50
Radiation protection	19.60	25.25	32.25	41.25
Ballistic shielding, fiberglass panels	32.75	47.50	69.00	99.50
Cold storage, insulation board	2.70	3.55	4.66	6.13
For each inch over 2", add	0.43	0.63	0.94	1.37

ROOF STRUCTURE - Apply to roof area.

Concrete joists, slab	17.60	20.05	22.85	26.00
Lift slab	15.85	17.95	20.25	22.85
Pan or waffle slab and joists	16.15	18.30	20.70	23.50
Precast joists and deck	15.35	17.45	19.75	22.40
Precast joists, wood deck	12.30	13.85	15.75	17.75
Cored plank on bearing walls	13.60	15.35	17.35	19.60
Thin shell	26.50	31.75	38.50	46.00
Concrete dome, cast–in–place	55.50	61.50	68.50	76.50
Thin shell	37.50	42.50	48.00	54.00
Fabric roof, air supported	59.50	65.00	70.50	77.50
Tension supported	67.50	76.00	84.50	95.00
Add for thermal liner	5.61	6.92	8.49	10.45
Steel joist, concrete slab	19.90	22.75	26.00	29.75
Gypsum on formboard	10.80	13.45	16.80	20.85
Precast deck	17.30	19.60	22.35	25.25
Steel deck	11.55	14.70	18.70	23.85
Light-gauge truss joist	9.62	12.40	15.85	20.45
Steel deck, gypsum or concrete	14.55	18.20	22.65	28.25
Wood or composition deck	9.48	12.10	15.40	19.65
Light gauge truss joists	8.10	10.50	13.55	17.55
Open steel system for corrugated metal	4.58	6.70	9.84	14.40
Light purlin supports only	2.17	2.81	3.64	4.73
Steel space frame and sheathing 3 dimensional	34.25	43.75	56.00	71.50
Architectural exclusive of glazing	51.00	78.00	119.00	178.00
Metal dome and cover	44.25	51.00	58.50	67.00
Glazed or translucent panels	102.00	124.00	152.00	184.00
Wood joists, wood or Composition deck	7.32	9.53	12.40	16.15
Exposed rafters, 2" T&G sheathing	10.35	13.05	16.45	20.65
Prefab. panels (exclusive of girders)	2.84	3.51	4.33	5.36
Stresskin sandwich panels (exclusive of purlins)	10.15	13.10	16.95	21.90
Add for snow roof, furred sheathing layer	2.92	3.23	3.58	3.96

ROOF STRUCTURE (Continued)

	1	2	3	4
Open wood system for corrugated metal	2.52	4.58	7.65	12.25
Light purlin supports only for metal, wood or fiberglass	1.16	1.55	2.05	2.73
Wood dome and deck	31.00	37.75	46.25	56.50
Add for seismic/hurricane truss ties	0.56	0.66	0.78	0.93
Add for monitor roof	69%	69%	69%	69%
Add for sawtooth roof	45%	45%	45%	45%
Add for complex roof, turrets, ornate trim	79%	79%	79%	79%

For treated wood, increase costs by 10% to 20%.

ROOF COVER - Apply to roof area.

Aluminum or steel, corrugated, crimped or tile panels, preformed light, to 26 gauge	3.11	3.98	5.09	6.50
Heavy, under 26 gauge	6.40	7.29	8.33	9.53
Formed seam, flat or standing	8.07	10.05	12.50	15.50
Batten seam	9.53	11.65	14.30	17.50
Sandwich panels, pre–engineered	12.70	16.05	20.40	26.00
Cold storage	28.00	31.75	35.75	40.75
Shingles	6.08	7.38	8.95	10.85
Aggregate finish	8.14	9.80	11.80	14.15
Thatch	25.75	28.25	31.25	34.25
Add for interior metal liner	2.88	3.27	3.72	4.24
plastic	2.70	3.06	3.46	3.92
Add for porcelain enamel finish	4.24	5.07	6.04	7.19
Add for stainless steel or textured (Galbestos)	4.91	5.82	6.90	8.16
Asphalt, corrugated	2.46	2.86	3.30	3.85
Atrium skylight, frame and glazing	50.50	68.00	91.50	123.00
Built–up composition	3.02	3.79	4.71	5.88
Cement fiber shingles	6.45	7.94	9.75	12.00
Corrugated or sheet (Transite)	5.98	8.34	11.65	16.35
Composition, roll, mineral surface	1.58	1.89	2.24	2.67
Composition shingles, light to 235#	2.65	2.98	3.34	3.76
Heavy, over 235# or laminated	3.51	4.42	5.54	6.98
Copper, flat or standing seam	16.80	19.75	23.15	27.25
Batten seam	18.35	21.35	24.95	29.00
Shingles	17.00	18.35	19.80	21.45
Elastomeric or modified bitumen, Single ply	4.99	6.54	8.59	11.25
Reinforced sheet or Spray fluid coat	8.65	10.00	11.60	13.45
Fiberglass, corrugated or sheet, light	3.11	3.62	4.26	4.99
Sandwich panels.	5.23	5.91	6.67	7.51
Heavy, FRP, over 8 oz.	5.88	7.43	9.37	11.85
Slate	11.85	14.05	16.80	19.95
Red	22.70	27.00	32.25	38.25
Composite reinforced fiber	8.32	10.00	12.05	14.55
Terne, flat or standing seam	16.60	19.30	22.40	26.00
Batten seam	18.05	20.90	24.25	28.00
Tile, clay	10.95	13.85	17.60	22.25
Concrete	7.75	9.01	10.50	12.20
Plastic or rubber	6.79	7.85	9.09	10.55
Add for custom coloring or glazing	1.96	2.46	3.08	3.85
Wood, shakes	5.85	6.71	7.69	8.79
Shingles	5.23	6.06	7.00	8.09
Fiber shingles	3.52	4.18	4.95	5.88
Add for fire–resistant finish	0.77	0.94	1.13	1.37
Add for roof insulation	1.37	2.18	3.39	5.17
Earth sheltered structures	2.31	3.55	5.39	8.13
Add for earth sheltered waterpoofing	2.03	3.02	4.49	6.66

NOTE: For underroof insulation and supporting structures, see Ceiling Extras on Page 2. For earthen roof cover, see Fill costs on Page 1. See UIP 13 for top dressing, sod and/or sprinklers. For specific earth–sheltered waterproofing, see UIP 1.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SCHOOL BUILDINGS
SECTION SEG 8
(SEGREGATED COST METHOD)

ROOF MODIFIERS – Use the following multipliers for sloping roofs to convert the unit costs to cost per square foot of horizontal roofed area.

Rise	Run	Multiplier	Rise	Run	Multiplier
6’	12’	1.12	12’	12’	1.42
8’	12’	1.20	18’	12’	1.80

TRUSSES AND GIRDERS – Apply to area supported.

Steel trusses or long span girders	3.95	5.01	6.34	8.01
Timber trusses	4.40	5.61	7.14	9.08
Glued, laminated trusses or girders	4.01	5.04	6.31	7.91

CATWALKS - Apply to linear footage of walkway.

Catwalks, steel	149.00	171.00	199.00	231.00
Wood	63.50	76.00	90.50	108.00
Ladders, steel	23.30	31.00	41.25	55.00
Wood	20.85	27.75	36.75	49.00

EXTERIOR BALCONIES - Apply to balcony area.

Concrete	30.00	39.25	51.00	66.00
Steel	27.75	37.50	50.50	68.00
Wood	26.00	34.50	46.25	61.50
Add for ornate finishes, balustrades	26.25	32.25	40.25	49.25

CANOPIES OR MARQUEES - Apply to horizontal area. For light false mansard structures, deduct 50%. For greater detail, see UIP 4 or UIP 6. For patio covers, see UIP 13.

Wood frame	38.00	47.00	58.00	71.50
Steel frame	44.25	56.00	70.50	88.50

DORMERS - See UIP 4, Roofs; for solar rooms, see UIP 4.

ARCHITECTURAL COLUMNS - See UIP 6.

ELEVATORS - Apply against area served if detailed costs from UIP 7 are not used.

Academic (college) libraries, Classes A and B	2.12	3.40	5.33	8.21
High schools, Classes A and B	1.14	1.92	3.06	4.78

MISCELLANEOUS

Athletic and playground equipment	UIP 12, 13 or 14
Bells, chimes and carillons	UIP 12
Flagpoles and fencing	UIP 13
Built–in appliances, fireplaces	SEG 1
Classroom and auditorium seating	UIP 12
Grandstands and bleachers	UIP 14
Kitchen, snack bar equipment	UIP 12
Lockers	UIP 12
Specialized interior ornament	UIP 2
Stained glass	UIP 6
Steeples, cupolas and clocks	UIP 4

BELL OR CLOCK TOWERS

Towers frequently start at ground level and extend above the roofline. They may be an integral part of the building, simply attached or entirely separate. When the base of the tower is large enough to be used as a room, perhaps a foyer or an office and is finished inside, that portion should be priced with the rest of the building on a square foot of floor and wall area basis. The tower cost would only apply to the unfinished portion above the roofline. If all the tower from the ground up is unfinished inside, it should all be priced as a tower. Towers are priced on the basis of square footage of vertical service, adding 15% to 20% to the appropriate Exterior Wall cost.

NUMBER OF STORIES MULTIPLIER

To allow for the cost of hoisting materials, increased labor costs and miscellaneous costs due to high–rise construction, multiply the total Segregated Costs of aboveground portions of the building by 100% plus .25% for each story over three.

Example: Seven–story building: Multiplier = 1.010

ATRIUM HVAC

To price the heating and cooling of large atrium areas, simply refine the appropriate square–foot–system cost to be applied to the ground floor area by 100% plus 3% for each foot over the 10–foot average story height adjustment found on Page 4.

Example: Seven–story building, atrium height of 74’: Multiplier = 2.92

COMPLETION OF BUILDING VALUATION

Contractors’ overhead and profit, sales taxes, permit fees and insurance during construction are included in the costs above. Interest on interim construction financing is also included, but not financing costs, real estate taxes or brokers’ commissions.

Architects’ fees are not included and should be added from Appendix C.

Depreciation suggestions are given in Appendix A.

County Multipliers which bring the basic costs up to date for each locality are found in Appendix D.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

Page Intentionally Left Blank

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.