CASINOS

OCCUPANCY DESCRIPTION: These buildings are designed mainly for gaming and entertainment, and include bars and lounges, showrooms, retail and food service facilities consistent with the level of quality.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Projection area, lighting and sound systems consistent with the overall quality. The costs include security and sound system, with better qualities having special lighting, stages, separate parlor and betting rooms and restaurants.

NOT INCLUDED IN COSTS: Gaming or food service equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 381.00	Heavy frame, best masonry walls, good entrance and lobby	Good gaming halls, show rooms and lobby, many extras	Special lighting, best sound system and plumbing, security	Hot and chilled water (zoned)
	Very good	330.00	Good architecture and trim, steel frame, best masonry	Central gaming, restaurants, retail, show, betting and meeting rooms	Special lighting and show sound system, good plumbing, security	Hot and chilled water (zoned)
	Good	272.00	Face brick, concrete and glass panels, good architecture, entry	Good gaming floor, betting, lounge and food areas, some good ornamentation	Good lighting and security system, good plumbing, food services	Warm and cool air (zoned)
	Average	205.00	Block, concrete panels, some trim, good entry	Drywall, vinyl, carpet, pavers, some lounge, betting rooms, coffee shop	Adequate lighting and plumbing, security system, bar and kitchen	Warm and cool air (zoned)
	Low-cost	151.00	Low-cost block, tilt-up, very plain, low-cost entry	Very plain, vinyl composition tile, carpet, few extras	Minimum lighting and plumbing	Heat pump system
D	Excellent	367.50	Face brick or stone veneer, heavy frame, good entrance and lobby	Good gaming halls, show rooms and lobby, many extras	Special lighting, best sound system and plumbing, security	Hot and chilled water (zoned)
	Very good	317.50	Good architecture and trim, heavy frame, best masonry veneer	Central gaming, restaurants, retail, show, betting and meeting rooms	Special lighting and show sound system, good plumbing, security	Hot and chilled water (zoned)
	Good	260.50	Brick veneer, best stucco, EIFS, siding, good trim, ornamental front	Good gaming floor, betting, lounge and food areas, some good ornamentation	Good lighting and security system, good plumbing, food services	Warm and cool air (zoned)
	Average	197.00	Good stucco or siding, some trim, good entry	Drywall, vinyl, carpet, pavers, some lounge, betting rooms, coffee shop	Adequate lighting and plumbing, security system, bar and kitchen	Warm and cool air (zoned)
	Low-cost	144.00	Low-cost stucco or siding, very plain, low-cost entry	Drywall, some acoustic, VCT, carpet, few rooms or extra	Minimum lighting and plumbing, limited lounge and food prep.	Heat pump system
S	Average	194.50	Metal sandwich panels, some trim, good entry	Drywall, vinyl, carpet, pavers, some lounge, betting rooms, coffee shop	Adequate lighting and plumbing, security system, bar and kitchen	Warm and cool air (zoned)
	Low-cost	142.50	Metal panels, very plain	Drywall, vinyl composition tile, carpet, few extras	Minimum lighting and plumbing	Heat pump system
CDS	Finished basement	176.50	Concrete masonry, finished interior	Adequate gaming, lounge area, restrooms, some utility and storage	Adequate lighting, plumbing and security, some extras	Heat pump system
	Finished mezzanine	120.00	Not included	Adequate lounge area, restrooms	Adequate lighting, plumbing and security	In building cost

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CASINOS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger or freight elevator with simple call system and push button control and two or three stops, costs $65,000 to $106,000.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG.	GOOD	EXCL.
Wood frame	$ 39.25	$ 48.50	$ 60.00	$ 74.50
Light false-mansard	21.65	26.50	33.00	40.75
Steel frame	48.25	61.00	77.00	97.00
Light false-mansard	26.50	33.50	42.25	53.00

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 5.18	$ 6.54	$ 8.28	$ 10.45
10,000	4.66	5.83	7.30	9.12
15,000	4.35	5.43	6.81	8.51
20,000	4.17	5.19	6.47	8.05
30,000	3.90	4.85	6.03	7.50
40,000	3.74	4.63	5.73	7.08
60,000	3.53	4.33	5.31	6.54
80,000	3.38	4.14	5.06	6.21
100,000	3.25	3.98	4.85	5.93
150,000	3.04	3.69	4.49	5.47
200,000	2.93	3.55	4.30	5.21

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 13.40	Package A.C. (short ductwork)	$ 28.75	Central refrigeration (zoned)	$ 20.50
Electric wall heaters	4.90	Warm and cool air (zoned)	43.25	package (short ductwork)	14.30
Forced air furnace	18.20	Hot/chilled water (zoned)	58.00	Central evaporative	8.01
Hot water, baseboard/convector	24.60	Heat pump system	36.25	Pkg. refrig.	$ 2,875 to $ 3,725 per ton capacity
Space heaters, with fan	5.62			Evap. coolers.	$ 427 to $ 700 per MCFM capacity
radiant	6.45				
Steam (including boiler)	22.35				
without boiler	20.20	Small indiv. heat pumps cost	$ 2,525 to $ 3,525	**VENTILATION ONLY**	
Wall or floor furnace	5.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 4.59

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
12	.889	28	1.313
14	.945	30	1.364
16	1.000 (base)	34	1.463
18	1.054	38	1.561
20	1.106	42	1.658
22	1.158	46	1754
24	1.210	50	1.849
26	1.262	54	1.943

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	175	200	250	300	400	500	600	700	800	900	1000	1200	1400	1600	Sq. Ft./Story
2,000	1.117	1.147	1.205	1.264	1.381	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000
5,000	.999	1.011	1.034	1.056	1.100	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,000
10,000	-----	-----	-----	-----	1.011	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	10,000
14,000	-----	-----	-----	-----	.982	1.001	1.018	1.034	1.049	1.063	-----	-----	-----	-----	14,000
20,000	-----	-----	-----	-----	-----	.971	.986	.999	1.011	1.023	1.034	1.056	-----	-----	20,000
25,000	-----	-----	-----	-----	-----	.954	.967	.980	.992	1.003	1.011	1.027	-----	-----	25,000
30,000	-----	-----	-----	-----	-----	.943	.954	.965	.976	.986	.995	1.011	1.026	-----	30,000
40,000	-----	-----	-----	-----	-----	-----	.938	.945	.954	.963	.971	.986	.999	1.011	40,000
45,000	-----	-----	-----	-----	-----	-----	.934	.939	.946	.954	.962	.976	.989	1.001	45,000
50,000	-----	-----	-----	-----	-----	-----	.930	.935	.941	.947	.954	.967	.980	.992	50,000
75,000	-----	-----	-----	-----	-----	-----	.920	.923	.926	.930	.934	.941	.949	.958	75,000
100,000	-----	-----	-----	-----	-----	-----	.914	.917	.920	.922	.925	.930	.935	.941	100,000

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CITY CLUBS



GOOD CLASS A/B



AVERAGE CLASS A

OCCUPANCY DESCRIPTION: City Clubs are private hotels. The structures are generally three or more stories in height, with multiple sleeping units having no individual kitchen facilities. Structures normally have combined heating and cooling systems.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowance for dining, gymnasium and library facilities and a lobby area. Service areas with good lighting, plumbing fixtures, and steam rooms. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, swimming pools, kitchen equipment, exercise equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Good	$314.00	Face brick or stone veneer, best metal and glass, concrete	Good plaster, paneling, carpet, fine detail, add for olympic pool	*TV and phone jacks in rooms, excellent service and fixtures	Hot and chilled water (zoned)
	Average	244.00	Brick, stone, metal or precast panels, little trim	Plaster or drywall, carpeting, good lounge and public area, gym	*Adequate, steam room, gym, add for swimming pool	Warm and cool air (zoned)
A-B	Finished basement	138.00	Finished interior	Plaster or drywall, vinyl comp., acoustic ceiling, shops, service functions	Adequate lighting/plumbing, restrooms, utility rooms	Hot water
	Parking basement	82.50	Unfinished	Concrete floor with hardener, lines and wheel stops	Minimum lighting/floor drains	Ventilation
	Utility basement	71.00	Painted interior	Few partitions and fire walls	Utility lighting/plumbing	None
C	Good	244.50	Face brick, stone or concrete and glass, good trim and entrance	Good plaster, paneling, carpet, good detail, add for olympic pool	*TV and phone jacks in rooms, good service and fixtures	Warm and cool air (zoned)
	Average	200.00	Brick, stone, metal or precast panels, little trim	Plaster or drywall, carpeting, good lounge and public areas, gym	*Adequate, steam room, gym, add for swimming pool	Warm and cool air (zoned)
C†	Finished basement	96.50	Finished interior	Plaster or drywall, vinyl composition, finished ceiling, service functions	Adequate lighting/plumbing, utility outlets and fixtures	Forced air
	Parking basement	52.50	Unfinished	Plaster ceiling, concrete floor with hardener	Minimum lighting/floor drains	Ventilation
	Utility basement	44.25	Unfinished	Unfinished, no ceiling	Minimum lighting/plumbing	None

†For fire-resistant Type I basements, with concrete slab separation under Class C, D or S units, add $8.79 per square foot to the basement cost.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CITY CLUBS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs	Classes C	Sq. Ft. Costs
Good	$ 8.20	Good	$ 5.28
Average	6.43	Average	4.25

ELEVATOR STOPS: For basement stops, add $ 9,550 to $14,400 per stop.

SWIMMING POOLS: Swimming pools, complete, cost $90.00 to $129.00 per square foot. For detailed costs, see Section UIP 16.

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$ 10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
75,000	3.00	3.73	4.59	5.71
100,000	2.69	3.30	4.06	5.01

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	14	1.114
9	.973	15	1.144
10	1.000 (base)	16	1.175
11	1.027	17	1.207
12	1.055	18	1.240
13	1.084		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLUBHOUSES



AVERAGE CLASS D



AVERAGE CLASS C

OCCUPANCY DESCRIPTION: Clubhouses are general-purpose recreation buildings such as Community Halls or Centers and Veteran Organization buildings. Large multipurpose complexes with auditoriums, kitchens, gamerooms and offices are classified as fraternal clubs.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowance for light kitchen facilities, large general-us room with stage, and multiple restrooms. The better facilities will have moveable partition walls and some small meeting rooms or offices.

NOT INCLUDED IN COSTS: Elevators, sprinklers, balconies, kitchen equipment or stage equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 278.50	Face brick, glass panels, stone, top quality	Plaster, terrazzo, tile pavers, hardwood, carpet, stage	Tiled restrooms, full kitchen, special lighting	Warm and cool air (zoned)
	Good	205.50	Face brick, concrete or metal panels, ornamentation	Plaster or drywall, carpet, hardwood, small stage, vinyl composition	Tiled restrooms, good kitchen, adequate lighting/plumbing	Heat pump system
	Average	146.50	Brick, block, concrete panels, some trim	Plaster or drywall, acoustic tile, vinyl composition, concrete slab	Adequate lighting/plumbing, average restrooms/kitchen	Forced air
	Low cost	100.00	Brick, block, tilt-up, no trim	Painted walls, concrete floor	Minimum lighting/plumbing	Wall furnace
D	Excellent	271.50	Stone or brick veneer, metal and glass panels, best quality	Plaster, terrazzo, tile pavers, hardwood, carpet, stage	Tiled restrooms, full kitchen, special lighting	Warm and cool air (zoned)
	Good	197.50	Brick veneer, good stucco or siding, ornamentation	Plaster or drywall, carpet, hardwood, vinyl composition, small stage	Tiled restrooms, good kitchen, adequate lighting/plumbing	Heat pump system
	Average	139.00	Brick veneer, stucco or siding, little trim	Plaster or drywall, acoustic tile, vinyl composition, concrete slab	Adequate lighting/plumbing, average restrooms/kitchen	Forced air
	Low cost	93.50	Stucco or siding, very plain	Drywall, concrete slab	Minimum lighting/plumbing	Wall furnace
D POLE	Low cost	84.00	Metal skin on pole frame and truss, some interior finish	Few partitions, concrete slab, part ceiling	Minimum electric/plumbing	Electric wall heaters
S	Excellent	243.00	Best sandwich panels, good fenestration and ornamentation	Drywall, terrazzo, tile pavers, hardwood, carpet, stage	Tiled restrooms, full kitchen, special lighting	Warm and cool air (zoned)
	Good	179.00	Insulated sandwich panels, some trim	Drywall, carpet and vinyl composition, small stage	Adequate lighting/plumbing, good kitchen and restrooms	Heat pump system
	Average	127.00	Insulated sandwich panels, pre-engineered frame	Gypsum or plywood, acoustic tile, vinyl composition	Adequate lighting/plumbing, average restrooms/kitchen	Forced air
	Low cost	84.50	Metal skin on pre-engineered frame, some interior finish	Few partitions, concrete slab, part ceiling	Minimum electric/plumbing	Electric wall heaters
CDS	Semifin. basement	62.00	Low-cost finishes	Minimum social functions	Minimum lighting/plumbing	Space htrs.
	Unfin. bsmt.	45.25	Unfinished interior	Unfinished storage and utility	Minimum lighting/drains	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLUBHOUSES

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small clubhouse elevator with simple call system and push-button control, four passenger cab and two or three stops costs $64,750 to $106,000.

KITCHEN UNITS: Average costs per linear foot of single-unit steel kitchens such as are found in clubhouses, containing sink, stove, oven and refrigerator. Add $199 to $1,420 for microwave oven.

	COST RANGE
Base section only	$1,070– $1,360
Base section and upper cabinets	1,460– 1,640

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$ 11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	14	1.114
9	.973	15	1.144
10	1.000 (base)	16	1.175
11	1.027	17	1.207
12	1.055	18	1.240
13	1.084	19	1.274
		20	1.309

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	550	600	650	700	750	800	1000	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000
4,000	.959	.989	1.021	1.052	1.083	1.113	-----	-----	-----	-----	-----	-----	-----	-----	4,000
6,000	-----	.938	.959	.980	1.000	1.021	1.042	1.063	-----	-----	-----	-----	-----	-----	6,000
8,000	-----	-----	.929	.944	.959	.974	.989	1.005	1.021	1.037	-----	-----	-----	-----	8,000
10,000	-----	-----	-----	.922	.935	.947	.959	.972	.984	.997	1.009	1.022	-----	-----	10,000
12,000	-----	-----	-----	.907	.917	.928	.938	.949	.959	.970	.980	.990	1.000	-----	12,000
14,000	-----	-----	-----	-----	.906	.915	.924	.933	.942	.951	.959	.968	.977	1.011	14,000
16,000	-----	-----	-----	-----	-----	.906	.913	.921	.929	.937	.944	.952	.959	.989	16,000
20,000	-----	-----	-----	-----	-----	-----	.898	.904	.910	.916	.922	.929	.935	.959	20,000
24,000	-----	-----	-----	-----	-----	-----	.886	.891	.896	.902	.907	.912	.917	.938	24,000
28,000	-----	-----	-----	-----	-----	-----	-----	.884	.888	.893	.898	.902	.906	.924	28,000
32,000	-----	-----	-----	-----	-----	-----	-----	.878	.882	.886	.889	.894	.898	.913	32,000

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SENIOR CENTERS – CLUBHOUSES



GOOD CLASS D



EXCELLENT CLASS D

OCCUPANCY DESCRIPTION: Senior Center Clubhouses are municipal-type clubhouses for senior citizens.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowance for light kitchen facilities, large general-use room with stage, and multiple restrooms. The better facilities will have moveable partition walls and some small meeting rooms or offices.

NOT INCLUDED IN COSTS: Elevators, sprinklers, balconies, kitchen equipment or stage equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$366.50	Face brick, glass panels, stone, top quality	Plaster, tile pavers, hardwood, carpet, good stage, activity rooms, lobby	Tiled restrooms, many fixtures, full kitchen, special lighting, alarms	Warm and cool air (zoned)
	Good	279.50	Face brick, concrete or metal panels, ornamentation	Plaster or drywall, carpet, hardwood, vinyl, meeting rooms, stage	Tiled restrooms, good kitchen, lighting and plumbing	Heat pump system
	Average	214.00	Brick, block, concrete panels, small entrance	Plaster or drywall, acoustic tile, carpet, vinyl composition, small stage	Adequate lighting/plumbing, restrooms and kitchen	Package A.C.
	Low cost	161.00	Brick, block, tilt-up, some trim	Painted walls, vinyl composition	Minimum lighting/plumbing, kitchen	Forced air
D	Excellent	356.00	Stone or brick veneer, metal and glass panels, top quality	Plaster, tile pavers, hardwood, carpet, good stage, activity rooms, lobby	Tiled restrooms, many fixtures, full kitchen, special lighting, alarms	Warm and cool air (zoned)
	Good	268.00	Brick veneer, good stucco or siding, ornamentation	Plaster or drywall, carpet, hardwood, vinyl, meeting room, stage	Tiled restrooms, good kitchen, lighting and plumbing	Heat pump system
	Average	204.00	Brick veneer, stucco or siding, small entrance	Plaster or drywall, acoustic tile, carpet, vinyl composition, small stage	Adequate lighting/plumbing, restrooms and kitchen	Package A.C.
	Low cost	152.00	Stucco or siding, very plain	Drywall, vinyl composition, game room	Minimum lighting/plumbing, kitchen	Forced air
S	Low cost	140.00	Metal skin on pre-engineered frame, interior finish	Few partitions, vinyl composition, game room	Minimum lighting/plumbing, kitchen	Forced air

REFINEMENTS: On this page are the means of making major adjustments to the base costs on the previous page. Follow Steps 1 through 5 to attain final costs, adjusted for lump sums, heating and cooling, story height, floor area/perimeter ratio and locality.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SENIOR CENTERS - CLUBHOUSES

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small clubhouse elevator with simple call system and push-button control, four passenger cab and two or three stops costs $64,750 to $106,000.

KITCHEN UNITS: Average costs per linear foot of single-unit steel kitchens such as are found in clubhouses, containing sink, stove, oven and refrigerator. Add $199 to $1,420 for microwave oven.

	COST RANGE
Base section only	$1,070 – $1,360
Base section and upper cabinets	1,460 – 1,640

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$ 11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	14	1.114
9	.973	15	1.144
10	1.000 (base)	16	1.175
11	1.027	17	1.207
12	1.055	18	1.240
13	1.084	19	1.274
		20	1.309

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	550	600	650	700	750	800	1000	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000
4,000	.959	.989	1.021	1.052	1.083	1.113	-----	-----	-----	-----	-----	-----	-----	-----	4,000
6,000	-----	.938	.959	.980	1.000	1.021	1.042	1.063	-----	-----	-----	-----	-----	-----	6,000
8,000	-----	-----	.929	.944	.959	.974	.989	1.005	1.021	1.037	-----	-----	-----	-----	8,000
10,000	-----	-----	-----	.922	.935	.947	.959	.972	.984	.997	1.009	1.022	-----	-----	10,000
12,000	-----	-----	-----	.907	.917	.928	.938	.949	.959	.970	.980	.990	1.000	-----	12,000
14,000	-----	-----	-----	-----	.906	.915	.924	.933	.942	.951	.959	.968	.977	1.011	14,000
16,000	-----	-----	-----	-----	-----	.906	.913	.921	.929	.937	.944	.952	.959	.989	16,000
20,000	-----	-----	-----	-----	-----	-----	.898	.904	.910	.916	.922	.929	.935	.959	20,000
24,000	-----	-----	-----	-----	-----	-----	.886	.891	.896	.902	.907	.912	.917	.938	24,000
28,000	-----	-----	-----	-----	-----	-----	-----	.884	.888	.893	.898	.902	.906	.924	28,000
32,000	-----	-----	-----	-----	-----	-----	-----	.878	.882	.886	.889	.894	.898	.913	32,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COMMUNITY RECREATION CENTERS



GOOD CLASS C



GOOD CLASS C

OCCUPANCY DESCRIPTION: These buildings are complete municipal multi-sport recreational complexes distinguished by large gymnasium/auditorium-type structures. These multipurpose buildings will include gym-basketball, handball-racquetball, bowling and other sport courts, rinks, varied swimming-natatorium facilities, running tracks, as well as exercise, craft, game and other social-multipurpose exercise rooms. The number of varied amenities and support facilities (locker room, sauna, snack bars, etc.) will vary with the level of quality.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Elevators, sprinklers, and equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Good	$ 334.50	Heavy frame, best masonry walls, good entrance and lobby	Good main court, rink, pools, viewing and food facilities, many extras	Good lighting and outlets, good plumbing, extra features, spa	Warm and cool air (zoned)
	Average	259.50	Steel columns and girders, face brick, best ornamental block	Meeting and activity rooms, gym or rink, sports courts, municipal pools	Adequate lighting and plumbing, locker rooms, catering kitchen	Heat pump system
C	Excellent	329.50	Steel columns and girders, face brick, best ornamental block	Good main court, rink, pools, viewing and food facilities, many extras	Best lighting and outlets, good plumbing, extra features, spa	Warm and cool air (zoned)
	Good	252.50	Steel or Glulam trusses or girders, brick, block or tilt-up, good trim	Meeting and activity rooms, gym or rink, sports courts, municipal pools	Good lighting and plumbing, locker rooms, catering kitchen	Heat pump system
	Average	192.00	Light frame, block or tilt-up, good entrance and lobby	Sports flooring, some tile, main gym or rink, single pool or sports courts	Adequate sports lighting and plumbing, lockers, kitchen	Package A.C.
	Low-cost	152.00	Light frame, block or tilt-up, very plain, small entrance	Sports flooring, main gym or rink only, few extra activities	Minimum sports lighting and plumbing, small kitchen	Package A.C.
D	Excellent	318.50	Steel or Glulam frame, trusses and girders, brick veneer, best stucco	Good main court, rink, pools, viewing and food facilities, many extras	Best lighting and outlets, good plumbing, extra features, spa	Warm and cool air (zoned)
	Good	242.50	Heavy frame, trusses or girders, good stucco or siding and trim	Meeting and activity rooms, gym or rink, sports courts, municipal pools	Good lighting and plumbing, locker rooms, catering kitchen	Heat pump system
	Average	184.50	Light frame, siding or stucco, good entrance and lobby	Sports flooring, some tile, main gym or rink, single pool or sports courts	Adequate sports lighting and plumbing, lockers, kitchen	Package A.C.
	Low-cost	145.50	Light frame, siding or stucco, very plain, small entrance	Sports flooring, main gym or rink only, few extra activities	Minimum sports lighting and plumbing, small kitchen	Package A.C.
S	Good	242.00	Insulated sandwich panels, good entrance and trim	Meeting and activity rooms, gym or rink, sports courts, municipal pools	Good lighting and plumbing, locker rooms, catering kitchen	Heat pump system
	Average	182.00	Good metal panels, front and lobby, some trim	Sports flooring, some tile, main gym or rink, single pool or sports courts	Adequate sports lighting and plumbing, lockers, kitchen	Package A.C.
	Low-cost	143.00	Metal panels, finished interior, small entrance	Sports flooring, main gym or rink only, few extra activities	Minimum sports lighting and plumbing, small kitchen	Package A.C.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COMMUNITY RECREATION CENTERS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger or freight elevator with simple call system and push button control and two or three stops, costs $65,000 to $106,000.

LOCKERS: per opening:

	COST RANGE		
Single Tier	$ 194.00	–	$ 374.00
Double	127.00	–	240.00
Triple	91.50	–	202.00
Box Type	66.00	–	123.00

SWIMMING POOLS: Swimming pools, complete, cost $90.00 to $129.00 per square foot. For detailed costs, see Section UIP 16.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 5.18	$ 6.54	$ 8.28	$ 10.45
10,000	4.66	5.83	7.30	9.12
15,000	4.35	5.43	6.81	8.51
20,000	4.17	5.19	6.47	8.05
30,000	3.90	4.85	6.03	7.50
40,000	3.74	4.63	5.73	7.08
60,000	3.53	4.33	5.31	6.54
80,000	3.38	4.14	5.06	6.21
100,000	3.25	3.98	4.85	5.93

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 13.40	Package A.C. (short ductwork)	$ 28.75	Central refrigeration (zoned)	$ 20.50
Electric wall heaters	4.90	Warm and cool air (zoned)	43.25	package (short ductwork)	14.30
Forced air furnace	18.20	Hot/chilled water (zoned)	58.00	Central evaporative	8.01
Hot water, baseboard/convector	24.60	Heat pump system	36.25	Pkg. refrig.	$ 2,875 to $ 3,725 per ton capacity
Space heaters, with fan	5.62			Evap. coolers.	$ 427 to $ 700 per MCFM capacity
radiant	6.45				
Steam (including boiler)	22.35				
without boiler	20.20	Small indiv. heat pumps cost	$ 2,525 to $ 3,525	**VENTILATION ONLY**	
Wall or floor furnace	5.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 4.59

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
12	.889	20	1.106
14	.945	22	1.158
16	1.000 (base)	24	1.210
18	1.054		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	250	300	350	400	450	500	600	700	800	900	1000	1200	1400	1600	Sq. Ft./Story
5,000	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	-----	.999	1.011	1.023	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	**10,000**
12,000	-----	-----	-----	.995	1.005	1.015	1.034	1.052	1.071	1.089	-----	-----	-----	-----	**12,000**
14,000	-----	-----	-----	.982	.992	1.001	1.018	1.034	1.049	1.063	-----	-----	-----	-----	**14,000**
20,000	-----	-----	-----	-----	-----	.971	.986	.999	1.011	1.023	1.034	1.056	-----	-----	**20,000**
25,000	-----	-----	-----	-----	-----	.954	.967	.980	.992	1.003	1.011	1.027	-----	-----	**25,000**
30,000	-----	-----	-----	-----	-----	.943	.954	.965	.976	.986	.995	1.011	1.026	-----	**30,000**
35,000	-----	-----	-----	-----	-----	.936	.945	.954	.964	.973	.982	.997	1.011	-----	**35,000**
40,000	-----	-----	-----	-----	-----	-----	.938	.945	.954	.963	.971	.986	.999	1.011	**40,000**
50,000	-----	-----	-----	-----	-----	-----	.930	.935	.941	.947	.954	.967	.980	.992	**50,000**
75,000	-----	-----	-----	-----	-----	-----	.920	.923	.926	.930	.934	.941	.949	.958	**75,000**
100,000	-----	-----	-----	-----	-----	-----	.914	.917	.920	.922	.925	.930	.935	.941	**100,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COMPUTER CENTERS



AVERAGE CLASS B

OCCUPANCY DESCRIPTION: Computer centers are electronic data processing plants, including ancillary offices. Most facilities will have a rather plain exterior appearance with little fenestration. The cost and quality selection will depend primarily on the amount of interior finish. An amount of raised computer floor is included, commensurate with the quality level. The better qualities have a large amount of good support room and many offices.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, parking, balconies or computer equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Excellent	$ 402.50	Good curtain walls, good brick and metal, with ornamentation	Plaster, acoustic ceilings, raised floor, much office space	Fluorescent lighting, many outlets, good plumbing, UPS & EPS	Hot and chilled water (zoned)
	Good	331.50	Face brick, metal panels, good concrete panels, ornamentation	Drywall or plaster, raised floors, good support rooms and offices	Good lighting, many outlets, adequate plumbing, UPS, EPS	Hot and chilled water (zoned)
	Average	274.00	Brick, block, concrete panels, low-cost metal panels	Painted walls and ceilings, raised floors, office and support rooms	Fluorescent lighting, adequate restrooms and plumbing, UPS	Hot and chilled water (zoned)
	Low cost	208.50	Low-cost brick, structural tile, block, concrete panels	Painted walls, large open areas, offices and support rooms	Fluorescent lighting, minimum plumbing	Warm and cool air (zoned)
A-B	Office basement	155.50	Plaster interior	Average office finish, acoustic tile, vinyl composition	Adequate office lighting and plumbing	Warm and cool air (zoned)
	Parking basement	89.00	Unfinished concrete, waterproofed walls	Unfinished, concrete floor, striped	Minimum lighting, adequate drains	Ventilation
	Office mezzanine	101.00	In building cost	Enclosed average office building finish, plaster soffit	Average office lighting and plumbing	Included in building cost
C	Good	244.00	Masonry or concrete, some ornamentation, steel frame	Plaster, raised floors, good support rooms and detail	Fluorescent lighting, adequate restrooms, plumbing, UPS & EPS	Warm and cool air (zoned)
	Average	201.50	Brick, block, concrete, load-bearing walls or frame	Gypsum board, raised floors, adequate office and support areas	Adequate lighting and plumbing	Warm and cool air (zoned)
	Low cost	160.50	Low-cost brick, concrete, block, tilt-up, very plain	Minimum finish and detail, small office and support areas	Minimum lighting, plumbing	Package A.C.
D	Average	192.50	Light frame or studs, stucco, siding, EIFS	Drywall or plaster, raised floors, adequate office and support areas	Fluorescent lighting, adequate plumbing	Warm and cool air (zoned)
	Low cost	153.00	Bearing studs and stucco or wood siding, very plain	Minimum finish and detail, small office and support areas	Minimum lighting, plumbing	Package A.C.
S	Average	195.50	Steel frame, transite, steel siding or sandwich panels	Drywall or plaster, raised floors, adequate office and support areas	Adequate lighting and plumbing	Warm and cool air (zoned)
CDS‡	Office basement	99.50	Plaster or drywall interior	Average office finish, acoustic tile, vinyl composition	Typical office lighting and plumbing	Forced air
	Parking basement	57.00	Unfinished concrete, waterproofed	Plaster or drywall ceiling, concrete floor, striped	Minimum lighting, adequate drains	Ventilation
	Office mezzanine	68,50	Included in building cost	Enclosed average building office finish, acoustic tile soffit	Average office lighting and plumbing	Included in building cost

‡For fire-resistant Type I basements, with concrete slab separation under Class C, D or S units, add $ 8.61 per square foot.
MEZZANINES: Do not use story height or area/perimeter multipliers with mezzanine costs.

NOTE: H.V.A.C costs must be carefully examined in older facilities where older, high-heat-producing equipment may have required very high-capacity systems. Adjustments can be made from Page CAL 159 when warranted.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COMPUTER CENTERS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger elevator with simple call system and push-button control, four-passenger cab, and two or three stops, costs $ 65,000 to $109,000.

For greater detail, see Section UIP 8.

ELEVATOR STOPS: For basement or mezzanine elevator stops, add $9,700 to $14,600 per stop.

DOCK HEIGHT FLOORS: Add $2.39 to $9.03 per square foot to base cost of first floor.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.63	$ 6.17	$ 8.24	$ 10.95
10,000	4.16	5.51	7.28	9.63
20,000	3.37	4.37	5.70	7.43
30,000	3.18	4.12	5.34	6.89
50,000	2.96	3.79	4.89	6.27
80,000	2.75	3.49	4.47	5.72
100,000	2.67	3.39	4.32	5.51
200,000	2.40	3.04	3.84	4.85
400,000	2.17	2.73	3.39	4.23

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 8.96	Package A.C. (short ductwork)	$ 19.75	Central refrigeration (zoned)	$ 16.70
Electric wall heaters	3.65	Warm and cool air (zoned)	27.00	package (short ductwork)	11.00
Forced air furnace	10.15	Hot/chilled water (zoned)	45.50	Central evaporative	6.89
Hot water, baseboard/convector	17.95	Heat pump system	24.85	Pkg. refrig.	$2,420 to $3,200 per ton capacity
Space heaters, with fan	5.11			Evap. coolers.	$ 341 to $560 per MCFM capacity
radiant	5.72				
Steam (including boiler)	15.65	Small indiv. heat pumps cost	$2,330 to $3,150	**VENTILATION ONLY**	
without boiler	13.65	per ton of rated capacity.		Vent. (blowers/ducts)	$ 2.96

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.885	20	1.133
10	.921	22	1.181
12	.960	24	1.231
14	1.000 (base)	26	1.281
16	1.041	28	1.331
18	1.086	30	1.382

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	300	400	500	600	800	1000	1200	1400	1600	1800	2000	2200	2400	3000	Sq. Ft./Story
5,000	1.083	1.168	1.252	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	.996	1.040	1.083	1.168	-----	-----	-----	-----	-----	-----	-----	-----	-----	**10,000**
14,000	-----	.945	.977	1.008	1.071	1.132	-----	-----	-----	-----	-----	-----	-----	-----	**14,000**
20,000	-----	-----	.926	.949	.996	1.040	1.083	-----	-----	-----	-----	-----	-----	-----	**20,000**
25,000	-----	-----	.907	.924	.959	.996	1.032	1.066	-----	-----	-----	-----	-----	-----	**25,000**
30,000	-----	-----	-----	.907	.935	.965	.995	1.025	-----	-----	-----	-----	-----	-----	**30,000**
40,000	-----	-----	-----	-----	.907	.926	.949	.972	.995	1.019	-----	-----	-----	-----	**40,000**
50,000	-----	-----	-----	-----	.891	.907	.924	.942	.959	.977	.996	1.015	-----	-----	**50,000**
80,000	-----	-----	-----	-----	-----	.875	.887	.898	.907	.916	.926	.937	.949	.984	**80,000**
100,000	-----	-----	-----	-----	-----	.863	.872	.882	.891	.899	.907	.916	.924	.950	**100,000**
200,000	-----	-----	-----	-----	-----	-----	.846	.850	.855	.859	.863	.868	.873	.887	**200,000**
400,000	-----	-----	-----	-----	-----	-----	-----	-----	.835	.838	.841	.843	.846	.853	**400,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CONVENTION CENTERS





AVERAGE/GOOD CLASS A

OCCUPANCY DESCRIPTION: These structures are large, open, arena/auditorium-type facilities for short-term meeting and/or trade show/display of products. The better facilities will have varied multifunctional space with movable partitions and ancillary eating and entertainment facilities.

GOOD CLASS A

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Elevators, sprinklers, movable floors and lights, seating, special equipment or kitchen equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Good	$ 391.00	Special architecture, good materials, good entrance and lobbies	Large clear-span halls, good meeting rooms, theater, grand ballrooms	Special lighting, good sound system and plumbing, kitchens	Warm and cool air (zoned)
	Average	286.00	Heavy frame, metal or concrete panels, good architecture	Good exhibit hall, meeting rooms and lobby, some extras	Good lighting and sound system, good plumbing and kitchen	Warm and cool air (zoned)
	Low-cost	212.50	Face brick, concrete panels with trim, plain architecture	Plain exhibit space and meeting rooms, few extras	Adequate lighting and plumbing, sound system, food service	Warm and cool air (zoned)
B	Good	350.50	Special architecture, good materials, good entrance and lobbies	Large clear-span halls, good meeting rooms, theater, grand ballrooms	Special lighting, good sound system and plumbing, kitchens	Warm and cool air (zoned)
	Average	258.50	Heavy frame, metal or concrete panels, good architecture	Good exhibit hall, meeting rooms and lobby, some extras	Good lighting and sound system, good plumbing and kitchen	Warm and cool air (zoned)
	Low-cost	194.00	Face brick, concrete panels with trim, plain architecture	Plain exhibit space and meeting rooms, few extras	Adequate lighting and plumbing, sound system, food service	Warm and cool air (zoned)
A-B	Unfinished basement	87.00	Unfinished interior	Unfinished storage and utility	Minimum lighting, drains	None
	Parking basement	97.00	Unfinished interior	Unfinished (service booth)	Exposed lighting, drains	Ventilation
	Finished mezzanine	111.00	Not included	Enclosed, average meeting room finish, plaster soffit	Average lighting and plumbing, tiled restrooms	In building cost
C	Excellent	316.00	Heavy frame, best masonry walls, good entrance and lobby	Good exhibit hall, meeting rooms and lobby, some extras	Special lighting, good sound system and plumbing, kitchens	Warm and cool air (zoned)
	Good	254.00	Steel columns and girders, face brick, best ornamental block	Plain exhibit space, average meeting rooms, few extras	Good lighting and sound system, good plumbing and kitchen	Warm and cool air (zoned)
	Average	191.50	Brick, block, concrete panels, little trim, good conference-type facility	Drywall, some ornamentation, vinyl composition, terrazzo lobby	Adequate lighting and plumbing, sound system, food service	Package A.C.
	Low-cost	144.00	Block, tilt-up, light frame	Painted, acoustic tile, carpet	Minimum lighting and plumbing	Forced air
D	Excellent	301.00	Face brick or stone veneer, heavy frame, good entrance and lobby	Good exhibit hall, meeting rooms and lobby, some extras	Special lighting, good sound system and plumbing, kitchens	Warm and cool air (zoned)
	Good	242.00	Steel and Glulam frame, trusses & girders, brick veneer, best stucco	Plain exhibit space, average meeting rooms, few extras	Good lighting and sound system, good plumbing and kitchen	Warm and cool air (zoned)
	Average	182.50	Good stucco, some trim, good conference-type facility	Drywall, some ornamentation, vinyl composition, terrazzo lobby	Adequate lighting and plumbing, sound system, food service	Package A.C.
	Low-cost	136.00	Low-cost stucco or siding, very plain	Drywall, acoustic tile, carpet	Minimum lighting and plumbing	Forced air
D POLE	Low-cost	130.50	Metal panels on pole frame, low-cost hotel-type facility	Few partitions, acoustic tile, carpet, tiled restrooms	Minimum lighting, plumbing and sound system	Forced air
S	Low-cost	136.00	Steel or aluminum panels, low-cost hotel-type facility	Few partitions, acoustic tile, carpet, tiled restrooms	Minimum lighting, plumbing and sound system	Forced air
CDS†	Unfinished basement	53.00	Unfinished interior	Unfinished storage and utility	Minimum lighting, drains	None
	Parking basement	62.50	Unfinished interior	Finished ceiling, concrete floor with hardener	Exposed lighting, adequate drains	Ventilation
	Finished mezzanine	79.00	Not included	Plaster or drywall soffit, meeting room partitions and finish	Average lighting and plumbing, tiled restrooms	In building cost

†For fire-resistant Type I basements, with concrete slab separation under Class C, D or S units, add $8.52 per square foot.
For finished basements and mezzanines, see Auditoriums and Theaters.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CONVENTION CENTERS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger elevator with simple call system and push-button control, four-passenger cab, and two or three stops, costs $ 65,000 to $ 106,000.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG.	GOOD	EXCL.
Wood frame	$ 39.25	$ 48.50	$ 60.00	$ 74.50
Light false-mansard	21.65	26.50	33.00	40.75
Steel frame	48.25	61.00	77.00	97.00
Light false-mansard	26.50	33.50	42.25	53.00

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 33.00	$ 42.00	$ 54.50	$ 70.00
Steel	31.00	41.75	56.00	76.00
Wood	26.00	35.00	46.75	62.50
Add for ornate finishes, balustrades	27.50	34.25	42.00	52.50
Add for roofs or awnings	15.20	20.10	26.75	35.50

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 5.18	$ 6.54	$ 8.28	$ 10.45
10,000	4.66	5.83	7.30	9.12
15,000	4.35	5.43	6.81	8.51
20,000	4.17	5.19	6.47	8.05
30,000	3.90	4.85	6.03	7.50
40,000	3.74	4.63	5.73	7.08
60,000	3.53	4.33	5.31	6.54
80,000	3.38	4.14	5.06	6.21
100,000	3.25	3.98	4.85	5.93
150,000	3.04	3.69	4.49	5.47
200,000	2.93	3.55	4.30	5.21

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 13.40	Package A.C. (short ductwork)	$ 28.75	Central refrigeration (zoned)	$ 20.50
Electric wall heaters	4.90	Warm and cool air (zoned)	43.25	package (short ductwork)	14.30
Forced air furnace	18.20	Hot/chilled water (zoned)	58.00	Central evaporative	8.01
Hot water, baseboard/convector	24.60	Heat pump system	36.25	Pkg. refrig.	$ 2,875 to $ 3,725 per ton capacity
Space heaters, with fan	5.62			Evap. coolers.	$ 427 to $ 700 per MCFM capacity
radiant	6.45				
Steam (including boiler)	22.35				
without boiler	20.20	Small indiv. heat pumps cost	$ 2,525 to $ 3,525	**VENTILATION ONLY**	
Wall or floor furnace	5.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 4.59

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by following multipliers for any variation in average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.776	22	1.158	38	1.561
12	.889	24	1.210	42	1.658
14	.945	26	1.262	50	1.849
16	1.000 (base)	28	1.313	58	2.036
18	1.054	30	1.364	66	2.219
20	1.106	34	1.463	74	2.398


4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	175	200	250	300	400	500	600	700	800	900	1000	1200	1400	1600	Sq. Ft./Story
2,000	1.117	1.147	1.205	1.264	1.381	-----	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
5,000	.999	1.011	1.034	1.056	1.100	-----	-----	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	-----	-----	-----	1.011	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	**10,000**
14,000	-----	-----	-----	-----	.982	1.001	1.018	1.034	1.049	1.063	-----	-----	-----	-----	**14,000**
20,000	-----	-----	-----	-----	-----	.971	.986	.999	1.011	1.023	1.034	1.056	-----	-----	**20,000**
25,000	-----	-----	-----	-----	-----	.954	.967	.980	.992	1.003	1.011	1.027	-----	-----	**25,000**
30,000	-----	-----	-----	-----	-----	.943	.954	.965	.976	.986	.995	1.011	1.026	-----	**30,000**
40,000	-----	-----	-----	-----	-----	-----	.938	.945	.954	.963	.971	.986	.999	1.011	**40,000**
45,000	-----	-----	-----	-----	-----	-----	.934	.939	.946	.954	.962	.976	.989	1.001	**45,000**
50,000	-----	-----	-----	-----	-----	-----	.930	.935	.941	.947	.954	.967	.980	.992	**50,000**
75,000	-----	-----	-----	-----	-----	-----	.920	.923	.926	.930	.934	.941	.949	.958	**75,000**
100,000	-----	-----	-----	-----	-----	-----	.914	.917	.920	.922	.925	.930	.935	.941	**100,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COUNTRY CLUBS

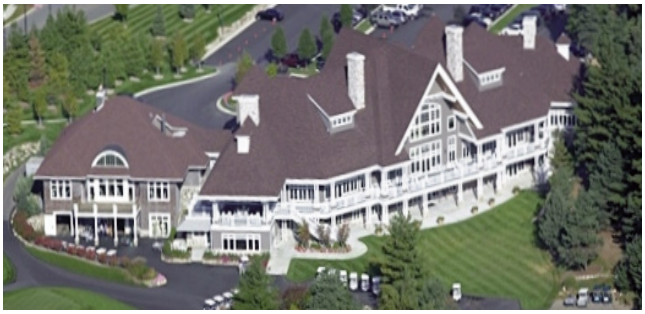

EXCELLENT CLASS D



AVERAGE CLASS D

OCCUPANCY DESCRIPTION: Structures are designed for entertainment and have few, if any, sleeping rooms. Entertaining groups requires good kitchen facilities, minimum restrooms with or without lockers and showers, and large general-use rooms.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Minimum allowance for small offices or meeting rooms. Higher-quality structures will have ballroom, bar, banquet and pro shop facilities, as well as extensive locker and shower rooms.

NOT INCLUDED IN COSTS: Elevators, sprinklers, balconies, fireplaces, swimming pools, lockers, kitchen or bar equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 346.00	Ashlar and face brick, metal and glass, top architecture	Plaster, quality carpet, hardwood, ceramic tile, sheet vinyl	High-capacity electrical service, fine electric/plumbing fixtures	Warm and cool air (zoned)
	Good	264.00	Stone trim, brick, metal or concrete panels and glass	Plaster or drywall, carpet, hardwood, vinyl composition	Good lighting, bar, dining room, kitchen, good plumbing	Heat pump system
	Average	202.00	Brick or block, concrete panels, some ornamentation	Plaster or drywall, carpet and vinyl composition	Adequate lighting, showers, bars, kitchen, adequate restrooms	Package A.C.
	Low cost	152.00	Concrete block or low-cost brick, very plain	Unfinished block, drywall partitions, minimum facilities	Minimum shower and locker rooms, minimum lighting	Forced air
D	Excellent	340.00	Ashlar or face brick veneer, top architecture, much glass	Plaster, quality carpet, hardwood, ceramic tile, sheet vinyl	High-capacity electrical service, fine electrical/plumbing fixtures	Warm and cool air (zoned)
	Good	255.00	Brick veneer, best stucco or siding, ornamentation	Plaster or drywall, carpeting, hardwood, vinyl composition	Good lighting, bar, dining room, kitchen, good plumbing	Heat pump system
	Average	193.00	Good stucco or siding, some brick or stone trim	Plaster or drywall, some carpet, vinyl composition	Adequate lighting, showers, bar, kitchen, adequate restrooms	Package A.C.
	Low cost	143.00	Stucco or siding, very plain	Drywall, vinyl composition, few partitions, minimum facilities	Minimum shower and locker rooms, minimum lighting	Forced air
S	Average	182.00	Insulated metal sandwich panels, steel frame, some trim	Drywall, carpet, cork, rubber, vinyl composition	Average quality and quantity, adequate facilities	Package A.C.
	Low cost	134.50	Enameled metal siding, finished interior, insulated	Drywall, rubber, vinyl composition, exposed concrete	Minimum electrical/plumbing, minimum facilities	Forced air
CDS	Finished	114.50	Reinforced concrete, plaster or drywall interior	Utility and dressing room finishes	Adequate lighting and plumbing, showers and restrooms	Forced air
	Utility basement	50.00	Painted interior, outside entry	Paint only, some partitions, golf cart maintenance and storage	Adequate lighting and outlets, drains	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

COUNTRY CLUBS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

FIREPLACES: For each additional opening using the same chimney, add 30% to 50%. Country Clubs with basements, add 40% to extend the foundation to the basement level. Custom oversized units can run 100% to 200% more.

TYPE	COST RANGE
One-story	$3,850 – $ 12,400
Two-stories	4,890 – 14,890

SWIMMING POOLS: Swimming pools, complete, cost per square foot. For detailed costs, see Section UIP 16. $90 to $129.00

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL
Wood frame	$ 38.00	$ 47.00	$ 58.00	$ 71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$ 11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
15,000	4.03	5.09	6.44	8.15
20,000	3.87	4.87	6.10	7.69
30,000	3.58	4.52	5.68	7.15
40,000	3.47	4.33	5.42	6.77

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	14	1.114
9	.973	15	1.144
10	1.000 (base)	16	1.175
11	1.027	17	1.207
12	1.055	18	1.240
13	1.084		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	550	600	650	700	750	800	1000	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000
4,000	.959	.989	1.021	1.052	1.083	1.113	-----	-----	-----	-----	-----	-----	-----	-----	4,000
6,000	-----	.938	.959	.980	1.000	1.021	1.042	1.063	-----	-----	-----	-----	-----	-----	6,000
8,000	-----	-----	.929	.944	.959	.974	.989	1.005	1.021	1.037	-----	-----	-----	-----	8,000
10,000	-----	-----	-----	.922	.935	.947	.959	.972	.984	.997	1.009	1.022	-----	-----	10,000
12,000	-----	-----	-----	.907	.917	.928	.938	.949	.959	.970	.980	.990	1.000	-----	12,000
14,000	-----	-----	-----	-----	.906	.915	.924	.933	.942	.951	.959	.968	.977	1.011	14,000
16,000	-----	-----	-----	-----	-----	.906	.913	.921	.929	.937	.944	.952	.959	.989	16,000
20,000	-----	-----	-----	-----	-----	-----	.898	.904	.910	.916	.922	.929	.935	.959	20,000
24,000	-----	-----	-----	-----	-----	-----	.886	.891	.896	.902	.907	.912	.917	.938	24,000
28,000	-----	-----	-----	-----	-----	-----	-----	.884	.888	.893	.898	.902	.906	.924	28,000
32,000	-----	-----	-----	-----	-----	-----	-----	.878	.882	.886	.889	.894	.898	.913	32,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CREAMERIES



GOOD CLASS C



AVERAGE CLASS C

OCCUPANCY DESCRIPTION: These buildings are designed for milk processing and butter making. They contain the necessary plumbing and electrical to operate the facility and have built-in refrigerators. They are built of masonry or wood frame construction and typically have plaster interiors. Floor finishes are commonly tile or epoxy over a concrete slab. The better qualities have a designated lab, process, storage and distribution areas.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Elevators, sprinklers, furnishings or processing equipment. The costs for special fixtures or equipment are not included.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Average	$ 176.00	Brick, concrete, solid construction	Plaster ceilings, tile floors, wainscot in production areas	Good lighting and plumbing, many outlets, lab	Steam
C	Good	168.00	Brick, block, concrete, retail entrance and storefront	Plaster, tile floors and wainscot, freezer and cooler rooms	Good lighting and plumbing, many outlets and drains, lab	Steam
	Average	125.50	Brick, block, little trim, steel or wood trusses or joists	Plaster walls and ceiling, epoxy and tile on concrete floor, freezer room	Adequate lighting, plumbing, power outlets and drains	Steam
	Low cost	83.50	Low-cost brick, block, tilt-up, no trim, wood rafters	Painted walls, slab floor, partly finished ceiling, chiller room	Minimum electrical and plumbing	Space heaters
D	Good	154.50	Brick veneer, good stucco and trim, EIFS, retail entrance and storefront	Plaster, tile floors and wainscot, freezer and cooler rooms	Good lighting and plumbing, many outlets and drains, lab	Steam
	Average	114.00	Brick veneer, good stucco, insulated, wood truss and rafters	Plaster walls and ceiling, some tile, concrete floor, freezer room	Adequate lighting, plumbing, power outlets and drains	Steam
	Low cost	74.50	Stucco or siding, no trim, light roof structure	Plaster or gypsum board, concrete slab, chiller room	Minimum lighting and outlets, minimum plumbing	Space heaters
S	Good	158.00	Good steel frame, sandwich panels, retail entrance and storefront	Plaster, tile floors and wainscot, freezer and cooler rooms	Good lighting and plumbing, many outlets and drains, lab	Steam
	Average	116.50	Rigid steel frame, insulated siding or sandwich panels, good roof	Plaster walls and ceiling, some tile, concrete floor, freezer room	Adequate lighting, plumbing, power outlets and drains	Steam
	Low cost	76.50	Pre-engineered frame, metal siding, lined	Plaster or gypsum board, concrete slab, chiller room	Minimum lighting and outlets, minimum plumbing	Space heaters

For basements and mezzanines, see Page CAL 144.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CREAMERIES

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger elevator with simple call system and push-button control, and two or three stops, costs $66,500 to $109,000.

For greater detail, see Section UIP 8.

DOCK HEIGHT FLOORS: Add $2.39 to $9.03 per square foot to base cost of first floor.

Loading docks, see Page CAL 398.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
1,000	$ 4.91	$ 6.57	$ 8.82	$ 11.74
2,500	4.63	6.17	8.24	10.95
5,000	4.16	5.51	7.28	9.63
7,500	3.78	4.95	6.48	8.49
10,000	3.54	4.62	6.03	7.88
15,000	3.37	4.37	5.70	7.43
20,000	3.18	4.12	5.34	6.89
50,000	2.96	3.79	4.89	6.27

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 8.96	Package A.C. (short ductwork)	$ 19.75	Central refrigeration (zoned)	$ 16.70
Electric wall heaters	3.65	Warm and cool air (zoned)	27.00	package (short ductwork)	11.00
Forced air furnace	10.15	Hot/chilled water (zoned)	45.50	Central evaporative	6.89
Hot water, baseboard/convector	17.95	Heat pump system	24.85	Pkg. refrig.	$2,420 to $3,200 per ton capacity
Space heaters, with fan	5.11			Evap. coolers.	$ 341 to $560 per MCFM capacity
radiant	5.72				
Steam (including boiler)	15.65	Small indiv. heat pumps cost	$2,330 to $3,150	**VENTILATION ONLY**	
without boiler	13.65	per ton of rated capacity.		Vent. (blowers/ducts)	$ 2.96

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.885	20	1.133
10	.921	22	1.181
12	.960	24	1.231
14	1.000 (base)	26	1.281
16	1.041	28	1.331
18	1.086	30	1.382

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	300	400	500	600	800	1000	1200	1400	1600	1800	2000	2200	2400	3000	Sq. Ft./Story
5,000	1.083	1.168	1.252	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	.996	1.040	1.083	1.168	-----	-----	-----	-----	-----	-----	-----	-----	-----	**10,000**
14,000	-----	.945	.977	1.008	1.071	1.132	-----	-----	-----	-----	-----	-----	-----	-----	**14,000**
20,000	-----	-----	.926	.949	.996	1.040	1.083	-----	-----	-----	-----	-----	-----	-----	**20,000**
25,000	-----	-----	.907	.924	.959	.996	1.032	1.066	-----	-----	-----	-----	-----	-----	**25,000**
30,000	-----	-----	-----	.907	.935	.965	.995	1.025	-----	-----	-----	-----	-----	-----	**30,000**
40,000	-----	-----	-----	-----	.907	.926	.949	.972	.995	1.019	-----	-----	-----	-----	**40,000**
50,000	-----	-----	-----	-----	.891	.907	.924	.942	.959	.977	.996	1.015	-----	-----	**50,000**
80,000	-----	-----	-----	-----	-----	.875	.887	.898	.907	.916	.926	.937	.949	.984	**80,000**
100,000	-----	-----	-----	-----	-----	.863	.872	.882	.891	.899	.907	.916	.924	.950	**100,000**
200,000	-----	-----	-----	-----	-----	-----	.846	.850	.855	.859	.863	.868	.873	.887	**200,000**
400,000	-----	-----	-----	-----	-----	-----	-----	-----	.835	.838	.841	.843	.846	.853	**400,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.