HANDBALL/RACQUETBALL CLUBS



GOOD CLASS C



AVERAGE CLASS C

OCCUPANCY DESCRIPTION: These are shell-type structures which include handball or racquetball court facilities. The cost of individual facilities can vary greatly depending on the type of structure and its appointments, including the extent of the lounge, refreshment, exercise, shower and spectator areas. Court floor surfaces are hardwood. Courts are totally enclosed to include four walls and a ceiling surface. Court access is through a flush-mounted door generally found in a rear or a side wall. The lower cost facilities are generally constructed with wood framed siding or a rigid steel frame and an exterior cover of an insulated steel panel or a masonry bearing wall. They include adequate lighting and plumbing, dressing rooms and shower facilities. Plaster walls, used primarily for low cost, non-regulation courts, require a masonry wall backing. The better quality structures include lounge and/or snack areas, health facilities, dressing rooms, showers and saunas. Spectator galleries are typically small and, in the best facilities, are located behind or above the back playing wall. When galleries are behind the court, portions of the rear wall surface are constructed with some type of safety glass. The second floor or mezzanine area should be included in the total floor area calculation.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Suitable office areas and lounge facilities.

NOT INCLUDED IN COSTS: Elevators, sprinklers, lockers, pools, exercise equipment, kitchen equipment or furnishings.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Good	$ 212.50	Brick or concrete, good entrance	Plaster or drywall, carpeting, good lounge, spectator courts, gym	Good sports lighting, restrooms, sauna, shower and locker rooms	Package A.C.
	Average	147.50	Brick or block, concrete panels, some ornamentation	Drywall, plain courts, limited viewing, snack bar area, exercise facilities	Adequate lighting, plumbing, showers, add for pool or spa	Package A.C.
D	Good	200.50	Brick veneer, best siding or stucco, trim, good entrance	Plaster or drywall, carpeting, good lounge, spectator courts, gym	Good sports lighting, restrooms, sauna, shower and locker rooms	Package A.C.
	Average	138.00	Good stucco or siding, some brick or stone trim	Drywall, plain courts, open viewing, snack bar area, exercise facilities	Adequate lighting, plumbing, showers, add for pool or spa	Package A.C.
S	Good	201.00	Insulated metal sandwich panels, steel frame, good entrance	Drywall, carpeting, good lounge, spectator courts, pro shop, gym	Good sports lighting, restrooms, sauna, shower and locker rooms	Package A.C.
	Average	136.50	Good metal panels and roof, finished interior, some trim	Drywall, plain courts, limited viewing, snack bar area, exercise facilities	Adequate lighting, plumbing, showers, add for pool or spa	Package A.C.
CDS	Finished basement	128.00	Reinforced concrete, plaster or drywall interior	Exercise and dressing room finishes, some utility and storage	Adequate lighting and plumbing, showers and restrooms	Forced air
	Good mezzanine	50.00	Not included	Open, finished running track, drywall soffit	Average lighting, no plumbing	In building cost
	Average mezzanine	34.25	Not included	Open, finished floors and soffit, add for spectator seating	Average lighting, no plumbing	In building cost

MEZZANINES: Do not use story height or area/perimeter multipliers with mezzanine costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANDBALL/RACQUETBALL CLUBS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger or freight elevator with simple call system and push button control and two or three stops, costs $65,000 to $106,000.

LOCKERS: per opening:

	COST RANGE		
Single Tier	$ 194.00	–	$ 374.00
Double	127.00	–	240.00
Triple	91.50	–	202.00
Box Type	66.00	–	123.00

SWIMMING POOLS: Swimming pools, complete, cost $90.00 to $129.00 per square foot. For detailed costs, see Section UIP 16.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 5.18	$ 6.54	$ 8.28	$ 10.45
10,000	4.66	5.83	7.30	9.12
15,000	4.35	5.43	6.81	8.51
20,000	4.17	5.19	6.47	8.05
30,000	3.90	4.85	6.03	7.50
40,000	3.74	4.63	5.73	7.08
60,000	3.53	4.33	5.31	6.54
80,000	3.38	4.14	5.06	6.21
100,000	3.25	3.98	4.85	5.93

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 13.40	Package A.C. (short ductwork)	$ 28.75	Central refrigeration (zoned)	$ 20.50
Electric wall heaters	4.90	Warm and cool air (zoned)	43.25	package (short ductwork)	14.30
Forced air furnace	18.20	Hot/chilled water (zoned)	58.00	Central evaporative	8.01
Hot water, baseboard/convector	24.60	Heat pump system	36.25	Pkg. refrig.	$ 2,875 to $ 3,725 per ton capacity
Space heaters, with fan	5.62			Evap. coolers.	$ 427 to $ 700 per MCFM capacity
radiant	6.45				
Steam (including boiler)	22.35				
without boiler	20.20	Small indiv. heat pumps cost	$ 2,525 to $ 3,525	**VENTILATION ONLY**	
Wall or floor furnace	5.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 4.59

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
12	.889	20	1.106
14	.945	22	1.158
16	1.000 (base)	24	1.210
18	1.054		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	250	300	350	400	450	500	600	700	800	900	1000	1200	1400	1600	Sq. Ft./Story
5,000	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,000
10,000	-----	-----	.999	1.011	1.023	1.034	1.056	1.078	1.100	-----	-----	-----	-----	-----	10,000
12,000	-----	-----	-----	.995	1.005	1.015	1.034	1.052	1.071	1.089	-----	-----	-----	-----	12,000
14,000	-----	-----	-----	.982	.992	1.001	1.018	1.034	1.049	1.063	-----	-----	-----	-----	14,000
20,000	-----	-----	-----	-----	-----	.971	.986	.999	1.011	1.023	1.034	1.056	-----	-----	20,000
25,000	-----	-----	-----	-----	-----	.954	.967	.980	.992	1.003	1.011	1.027	-----	-----	25,000
30,000	-----	-----	-----	-----	-----	.943	.954	.965	.976	.986	.995	1.011	1.026	-----	30,000
35,000	-----	-----	-----	-----	-----	.936	.945	.954	.964	.973	.982	.997	1.011	-----	35,000
40,000	-----	-----	-----	-----	-----	-----	.938	.945	.954	.963	.971	.986	.999	1.011	40,000
50,000	-----	-----	-----	-----	-----	-----	.930	.935	.941	.947	.954	.967	.980	.992	50,000
75,000	-----	-----	-----	-----	-----	-----	.920	.923	.926	.930	.934	.941	.949	.958	75,000
100,000	-----	-----	-----	-----	-----	-----	.914	.917	.920	.922	.925	.930	.935	.941	100,000

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – MAINTENANCE



GOOD CLASS C



AVERAGE CLASS S

OCCUPANCY DESCRIPTION: Hangars similar to storage hangars, but with more plumbing, electrical and interior construction costs. These hangars are used for complete maintenance and repair functions. The higher quality hangars are the main base facilities for commercial airlines and include a large amount of interior construction. They include suitable office, locker, break and restroom areas, secure storage facilities, and electrical, plumbing, heating and utilities to accommodate large maintenance crews.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Office partitions and utility services.

NOT INCLUDED IN COSTS: Sprinklers, personnel lifts, hoists, security equipment or furnishings.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 172.00	Structural steel, concrete panels, major jet hangars	Supply rooms, offices, heavy floor, craneways	Many power outlets, good lighting and plumbing	Package A.C.
	Good	112.50	Steel frame, concrete panels or brick, heavy structure	Supply rooms, offices, heavy floor, storage and repair	Good electrical and plumbing	Space heaters
	Average	82.00	Pilasters or steel frame, block, tilt-up, wood or steel trusses	Painted, few partitions, small office, concrete floor	Power outlets, drains, restroom	Space heaters
	Low cost	60.00	Concrete block, low-cost brick, tilt-up, light roof structure	Some partitions, few extras, concrete or asphalt floor	Minimum lighting and plumbing, power outlets	Space heaters
D	Average	75.00	Frame and stucco or siding, light and medium aircraft hangars	Small office, few partitions, concrete floor	Power outlets, drains, restroom	Space heaters
	Low cost	54.50	Wood frame, stucco or siding, light roof structure	Some partitions, few extras, concrete or asphalt floor	Minimum electrical and plumbing, power outlets	Space heaters
S	Excellent	163.00	Structural steel, heavy steel siding, major jet hangars	Supply rooms, offices, heavy floor, craneways	Many power outlets, good lighting and plumbing	Package A.C.
	Good	104.00	Structural steel, steel siding, heavy aircraft hangars	Supply rooms, offices, heavy floor, storage and repair	Good electrical and plumbing	Space heaters
	Average	73.00	Steel frame and siding, light and medium aircraft hangars	Small office, few partitions, concrete floor	Power outlets, drains, restroom	Space heaters
	Low cost	51.50	Steel frame, steel siding, light roof structure	Some partitions, few extras, concrete or asphalt floor	Minimum electrical and plumbing, power outlets	Space heaters

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – MAINTENANCE

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1 **SPRINKLERS:** Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.16	$ 5.51	$ 7.28	$ 9.63
10,000	3.78	4.95	6.48	8.49
15,000	3.54	4.62	6.03	7.88
20,000	3.37	4.37	5.70	7.43
30,000	3.18	4.12	5.34	6.89
50,000	2.96	3.79	4.89	6.27
80,000	2.75	3.49	4.47	5.72
100,000	2.67	3.39	4.32	5.51
150,000	2.49	3.17	4.02	5.11
200,000	2.40	3.04	3.84	4.85
300,000	2.32	2.91	3.68	4.63

2 **HEATING AND COOLING**

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 8.96	Package A.C. (short ductwork)	$ 19.75	Central refrigeration (zoned)	$ 16.70
Electric wall heaters	3.65	Warm and cool air (zoned)	27.00	package (short ductwork)	11.00
Forced air furnace	10.15	Hot/chilled water (zoned)	45.50	Central evaporative	6.89
Hot water, baseboard/convector	17.95	Heat pump system	24.85	Pkg. refrig.	$2,420 to $3,200 per ton capacity
Space heaters, with fan	5.11			Evap. coolers.	$ 341 to $560 per MCFM capacity
radiant	5.72				
Steam (including boiler)	15.65	Small indiv. heat pumps cost	$2,330 to $3,150	**VENTILATION ONLY**	
without boiler	13.65	per ton of rated capacity.		Vent. (blowers/ducts)	$ 2.96

3 **HEIGHT REFINEMENTS**

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
18	1.086	30	1.382	60	2.225
20	1.133	35	1.515	70	2.530
22	1.181	40	1.650	80	2.845
24	1.231	45	1.788	90	3.161
26	1.281	50	1.930	100	3.461
28	1.331	55	2.075	110	3.738

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	300	400	500	600	800	1000	1200	1400	1600	1800	2000	2200	2400	3000	Sq. Ft./Story
5,000	1.083	1.168	1.252	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	.996	1.040	1.083	1.168	-----	-----	-----	-----	-----	-----	-----	-----	-----	**10,000**
14,000	-----	.945	.977	1.008	1.071	1.132	-----	-----	-----	-----	-----	-----	-----	-----	**14,000**
20,000	-----	-----	.926	.949	.996	1.040	1.083	-----	-----	-----	-----	-----	-----	-----	**20,000**
25,000	-----	-----	.907	.924	.959	.996	1.032	1.066	-----	-----	-----	-----	-----	-----	**25,000**
30,000	-----	-----	-----	.907	.935	.965	.995	1.025	-----	-----	-----	-----	-----	-----	**30,000**
40,000	-----	-----	-----	-----	.907	.926	.949	.972	.995	1.019	-----	-----	-----	-----	**40,000**
50,000	-----	-----	-----	-----	.891	.907	.924	.942	.959	.977	.996	1.015	-----	-----	**50,000**
80,000	-----	-----	-----	-----	-----	.875	.887	.898	.907	.916	.926	.937	.949	.984	**80,000**
100,000	-----	-----	-----	-----	-----	.863	.872	.882	.891	.899	.907	.916	.924	.950	**100,000**
200,000	-----	-----	-----	-----	-----	-----	.846	.850	.855	.859	.863	.868	.873	.887	**200,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – STORAGE



GOOD CLASS S



GOOD CLASS S

OCCUPANCY DESCRIPTION: These buildings are designed primarily for aircraft storage and light maintenance and repair. Built usually in Class C, D or S construction, the highest quality storage hangars are for line servicing of large commercial airplanes. Storage hangars have some office area and storage area.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Restroom and plumbing facilities for small crews of maintenance personnel.

NOT INCLUDED IN COSTS: Sprinklers, maintenance equipment or hoists.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 130.00	Structural steel, concrete panels, major jet hangars	Offices, few partitions, heavy floor	Good lighting and plumbing	Space heaters
	Good	91.00	Steel frame, concrete panels or brick, heavy structure	Offices, heavy floor	Good electrical and plumbing	Space heaters
	Average	59.50	Pilasters or steel frame, block, tilt-up, wood or steel trusses	Painted, small office, concrete floor	Adequate electrical and plumbing	None
	Low cost	41.00	Block, cheap brick, tilt-up, light roof	Concrete or asphalt floor, few extras	Minimum electrical and water	None
D	Average	53.00	Frame and stucco or siding, light and medium aircraft hangars	Small office, concrete floor	Adequate electrical and plumbing	None
	Low cost	36.50	Wood frame, stucco or siding, light roof structure	Concrete or asphalt floor, few extras	Minimum electrical and plumbing	None
D POLE	Low cost	31.50	Metal siding on pole frame, windows, light aircraft hangar	Shop area, light floor, few extras, some interior wall finish	Adequate electrical and water service	None
	Cheap	23.00	Pole frame, metal siding	Unfinished, partially floored	Minimum electrical	None
S	Excellent	120.00	Structural steel, heavy steel siding, major jet hangars	Offices, few partitions, heavy floor	Good lighting and plumbing	Space heaters
	Good	83.00	Structural steel, steel siding, heavy aircraft hangars	Offices, heavy floor	Good electrical and plumbing	Space heaters
	Average	52.50	Steel frame and siding, light and medium aircraft hangars	Small office, concrete floor	Adequate electrical and plumbing	None
	Low cost	35.50	Pre-engineered, steel siding, light roof structure	Concrete or asphalt floor, few extras	Minimum electrical and water	None
	Cheap	26.00	Light metal frame, siding	Unfinished, partially floored	Minimum electrical	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – STORAGE

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1 **SPRINKLERS:** Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
2,500	$ 4.63	$ 6.17	$ 8.24	$ 10.95
5,000	4.16	5.51	7.28	9.63
10,000	3.78	4.95	6.48	8.49
15,000	3.54	4.62	6.03	7.88
20,000	3.37	4.37	5.70	7.43
30,000	3.18	4.12	5.34	6.89
50,000	2.96	3.79	4.89	6.27
100,000	2.67	3.39	4.32	5.51

2 **HEATING AND COOLING**

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 8.96	Package A.C. (short ductwork)	$ 19.75	Central refrigeration (zoned)	$ 16.70
Electric wall heaters	3.65	Warm and cool air (zoned)	27.00	package (short ductwork)	11.00
Forced air furnace	10.15	Hot/chilled water (zoned)	45.50	Central evaporative	6.89
Hot water, baseboard/convector	17.95	Heat pump system	24.85	Pkg. refrig.	$2,420 to $3,200 per ton capacity
Space heaters, with fan	5.11			Evap. coolers.	$ 341 to $560 per MCFM capacity
radiant	5.72				
Steam (including boiler)	15.65	Small indiv. heat pumps cost	$2,330 to $3,150	**VENTILATION ONLY**	
without boiler	13.65	per ton of rated capacity.		Vent. (blowers/ducts)	$2.96

3 **HEIGHT REFINEMENTS**

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
14	1.000 (base)	24	1.231	40	1.650
16	1.041	26	1.281	45	1.788
18	1.086	28	1.331	50	1.930
20	1.133	30	1.382	55	2.075
22	1.181	35	1.515	60	2.225

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	150	175	200	250	300	400	500	600	800	900	1000	1200	1500	2000	Sq. Ft./Story
2,000	1.147	1.199	1.252	1.360	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
5,000	-----	-----	.996	1.040	1.083	1.168	1.252	-----	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	-----	-----	-----	-----	.996	1.040	1.083	1.168	1.210	-----	-----	-----	-----	**10,000**
14,000	-----	-----	-----	-----	-----	.945	.977	1.008	1.071	1.102	1.132	-----	-----	-----	**14,000**
20,000	-----	-----	-----	-----	-----	-----	.926	.949	.996	1.019	1.040	1.083	-----	-----	**20,000**
25,000	-----	-----	-----	-----	-----	-----	.907	.924	.959	.977	.996	1.032	-----	-----	**25,000**
30,000	-----	-----	-----	-----	-----	-----	-----	.907	.935	.949	.965	.995	1.040	-----	**30,000**
40,000	-----	-----	-----	-----	-----	-----	-----	-----	.907	.916	.926	.949	.984	-----	**40,000**
50,000	-----	-----	-----	-----	-----	-----	-----	-----	.891	.898	.907	.924	.950	.996	**50,000**
60,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	.889	.895	.907	.928	.965	**60,000**
80,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	.869	.875	.887	.903	.926	**80,000**
100,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	.863	.872	.887	.907	**100,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – T



AVERAGE CLASS S

OCCUPANCY DESCRIPTION: These are multiple hangars for small planes, with subdivided walls, and doors. Interiors have concrete slab floors, with very few extras. They have minimum electrical, occasionally plumbing and, commonly, no heating or cooling.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Sprinklers, heating or plumbing.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Average	$ 53.00	Concrete block, low-cost brick, tilt-up, light roof structure	Subdivided storage hangar, concrete floor, small office	Adequate electrical and water service	None
D POLE	Low cost	34.00	Pole frame and truss, metal siding	Subdivided storage hangar, few extras, light floor and doors	Minimum electrical service	None
S	Average	48.50	Good steel frame, enameled steel panels	Subdivided storage hangar, concrete floor, small office	Adequate electrical and water service	None
	Low cost	37.50	Pre-engineered, steel siding	Subdivided storage hangar, few extras, light floor	Minimum electrical service	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HANGARS – T

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

CANOPIES: Open sport-plane canopies or sunshade shelters generally cost $11.95 to $24.45 per square foot of covered area.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.16	$ 5.51	$ 7.28	$ 9.63
10,000	3.78	4.95	6.48	8.49
15,000	3.54	4.62	6.03	7.88
20,000	3.37	4.37	5.70	7.43
30,000	3.18	4.12	5.34	6.89
50,000	2.96	3.79	4.89	6.27
80,000	2.75	3.49	4.47	5.72
100,000	2.67	3.39	4.32	5.51

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 8.96	Package A.C. (short ductwork)	$ 19.75	Central refrigeration (zoned)	$ 16.70
Electric wall heaters	3.65	Warm and cool air (zoned)	27.00	package (short ductwork)	11.00
Forced air furnace	10.15	Hot/chilled water (zoned)	45.50	Central evaporative	6.89
Hot water, baseboard/convector	17.95	Heat pump system	24.85	Pkg. refrig.	$2,420 to $3,200 per ton capacity
Space heaters, with fan	5.11			Evap. coolers.	$ 341 to $ 560 per MCFM capacity
radiant	5.72				
Steam (including boiler)	15.65	Small indiv. heat pumps cost	$2,330 to $3,150	**VENTILATION ONLY**	
without boiler	13.65	per ton of rated capacity.		Vent. (blowers/ducts)	$ 2.96

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.885	14	1.000 (base)
10	.921	16	1.041
12	.960	18	1.086

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	100	150	200	250	300	350	400	450	500	600	800	1000	1200	1500	Sq. Ft./Story
1,000	1.252	1.468	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**1,000**
2,000	-----	1.147	1.252	1.360	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
5,000	-----	-----	.996	1.040	1.083	1.125	1.168	1.210	1.252	-----	-----	-----	-----	-----	**5,000**
8,000	-----	-----	-----	-----	.984	1.013	1.040	1.068	1.094	1.147	1.252	-----	-----	-----	**8,000**
10,000	-----	-----	-----	-----	-----	.972	.996	1.019	1.040	1.083	1.168	-----	-----	-----	**10,000**
14,000	-----	-----	-----	-----	-----	-----	.945	.961	.977	1.008	1.071	1.132	-----	-----	**14,000**
18,000	-----	-----	-----	-----	-----	-----	-----	.929	.942	.967	1.016	1.065	-----	-----	**18,000**
20,000	-----	-----	-----	-----	-----	-----	-----	-----	.926	.949	.996	1.040	1.083	-----	**20,000**
25,000	-----	-----	-----	-----	-----	-----	-----	-----	.907	.924	.959	.996	1.032	-----	**25,000**
30,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	.907	.935	.965	.995	1.040	**30,000**
40,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	.907	.926	.949	.984	**40,000**
50,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	.891	.907	.924	.950	**50,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HEALTH CLUBS



GOOD CLASS C



AVERAGE CLASS D

OCCUPANCY DESCRIPTION: Health clubs are designed as physical fitness facilities, with various exercise and conditioning areas. Generally, the better clubs have snack bars, massage and steam rooms and sauna facilities, as well as locker and shower rooms.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Suitable rooms for showers, lockers, and steam.

NOT INCLUDED IN COSTS: Elevators, sprinklers, kitchen equipment, steam-generating equipment, lockers, sports courts, spas, exercise equipment, swimming pools or spas.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Good	$ 243.00	Stone trim, brick, metal or concrete panels and glass	Plaster, carpet, tile, hardwood, good snack bar, lounge and gym	Good lighting/lamps, steam, shower, locker and restrooms	Warm and cool air (zoned)
	Average	178.50	Brick or block, concrete panels, some ornamentation	Plaster or drywall, carpet, vinyl composition, good exercise rooms	Adequate lighting, plumbing, sauna	Heat pump system
	Low cost	132.00	Concrete block or low cost brick, tilt-up, very plain	Painted block, drywall partitions, minimum facilities	Minimum shower and locker rooms, minimum lighting	Package A.C.
D	Good	234.00	Brick veneer, best stucco or siding, ornamentation	Plaster, carpet, tile, hardwood, good snack bar, lounge and gym	Good lighting/lamps, steam, shower, locker and restrooms	Warm and cool air (zoned)
	Average	170.50	Good stucco or siding, some brick or stone trim	Plaster or drywall, some carpet and tile, good exercise rooms	Adequate lighting, plumbing, sauna	Heat pump system
	Low cost	125.50	Stucco or siding, very plain	Drywall, vinyl composition, few partitions, minimum facilities	Minimum shower and locker rooms, minimum lighting	Package A.C.
S	Average	164.00	Insulated metal sandwich panels, steel frame	Plaster or drywall, some carpet and tile, good exercise rooms	Adequate lighting, plumbing, sauna	Heat pump system
	Low cost	120.00	Enameled metal siding, insulated, some interior finish	Drywall, vinyl composition, few partitions, minimum facilities	Minimum shower and locker rooms, minimum lighting	Package A.C.
CDS	Finished basement	186.50	Reinforced concrete, plaster or drywall interior	Utility and dressing room finishes	Adequate lighting and plumbing, showers and restrooms	Forced air
	Utility basement	45.25	Unfinished interior	Unfinished storage and utility	Minimum lighting/drains	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HEALTH CLUBS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

SWIMMING POOLS: Swimming pools, complete, cost $90.00 to $129.00 per square foot. For detailed costs, see Section UIP 16.

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$ 11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	15	1.144
9	.973	16	1.175
10	1.000 (base)	17	1.207
11	1.027	18	1.240
12	1.055	19	1.274
13	1.084	20	1.309
14	1.114		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**


5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HIGH-RISE ROW (TOWN) HOUSES



GOOD CLASS B

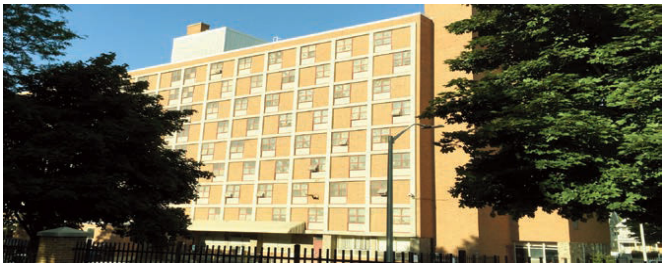

AVERAGE CLASS B

OCCUPANCY DESCRIPTION: This occupancy is usually an individually built high-rise, three stories or more with adjacent units not sharing common structural systems (i.e., roof, foundation, etc.). This type of row house has finished side walls, or blind walls, between residences, which is constructed on a corner or at the end of an urban row, having one exposed side wall and one blind side wall.

Enter the floor area, shape and number of stories for the individual end unit.

Base the rank selection on the inspection of both the interior and exterior refinements of the structure. Items such as fenestration (the number and size of window and door openings), roof configuration, materials, workmanship, types of plumbing fixtures, and amount of cabinetry are all indicators of quality.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowance for lobby area and interior hall access to dwelling units.

NOT INCLUDED IN COSTS: Sprinklers, appliances or balconies.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 229.50	Face brick, stone, best windows, sloping roof, tile, slate, metal	Plaster, paint, paper, paneling, fine hardwood, vinyl, carpet	Best lighting and plumbing, one bath per bedroom	Warm and cool air
	Good	171.50	Brick, some trim or good stucco, good roof, good fenestration	Plaster or gypsum board, paint, hardwood, vinyl composition, carpet	Good lighting and plumbing, one bath per two bedrooms	Package A.C.
	Average	133.00	Brick, stucco on block, little trim, built-up roof or asphalt shingles	Gypsum board and paint, hardwood, vinyl composition, carpet	Adequate lighting and plumbing, standard fixtures	Hot water
	Low	100.00	Block or brick, standard sash	Drywall, carpet, vinyl composition	Standard fixtures	Forced air
CMILL	Excellent	240.00	Heavy face brick, stone, best windows, good trim	Plaster, paint, paper, paneling, fine hardwood, vinyl, carpet	Best lighting and plumbing, one bath per bedroom	Hot water
	Good	194.50	Mill-type construction, heavy brick or stone walls, good sash	Drywall or plaster, good carpet/hardwood, vinyl composition, ceramic tile	Good lighting and plumbing, one bath per two bedrooms	Hot water
	Average	158.00	Mill-type construction, brick, cut stone, wood joists and trusses	Drywall or plaster, average carpet and vinyl composition, softwood	Adequate lighting and plumbing, standard fixtures	Hot water
D MASONRY VENEER	Excellent	226.00	Best brick veneer, good stone trim, heavy roof, tile, slate, metal	Plaster, paint, paper, paneling, fine hardwood, vinyl carpet	Best lighting and plumbing, one bath per bedroom	Warm and cool air
	Good	168.50	Brick veneer, good roof, some ornamentation, good fenestration	Plaster or gypsum board, paint, hardwood, vinyl composition, carpet	Good lighting and plumbing, one bath per two bedrooms	Package A.C.
	Average	132.00	Brick veneer, built-up or asphalt shingle roof, little trim	Plaster or gypsum board, hardwood, vinyl composition, low-cost carpet	Adequate lighting and plumbing, standard fixtures	Hot water
	Low	99.00	Brick veneer, standard sash	Drywall, carpet, vinyl composition	Standard fixtures	Forced air
D	Excellent	217.50	Best stucco or siding, brick or stone trim, heavy roof, tile, slate, metal	Plaster, paint, paper, paneling, fine hardwood, vinyl, carpet	Best lighting and plumbing, one bath per bedroom	Warm and cool air
	Good	162.00	Good stucco or siding, brick trim, good roof, good fenestration	Plaster or gypsum board, paint, hardwood, vinyl composition, carpet	Good lighting and plumbing, one bath per two bedrooms	Package A.C.
	Average	126.50	Stucco or siding, little trim, built-up or asphalt shingle roof	Plaster or gypsum board, hardwood, vinyl composition, carpet	Adequate lighting and plumbing, standard fixtures	Hot water
	Low	95.00	Siding or stucco, standard sash	Drywall, carpet, vinyl composition	Standard fixtures	Forced air
C-D	Unfin/Util basement	30.25	Unfinished block or concrete walls, waterproofed, common wall	Unfinished interior, exposed joists, open stairs, concrete slab	Minimum light fixtures & outlets, floor drain and radon vent only	None
	Semi-finished basement	38.50	Block or concrete walls, waterproofed, reinforced concrete slab	Painted wall, gypsum or acoustic tile ceiling, stairs with risers	Adequate lighting and appliance outlets, laundry tray and drains	None
	Game room, finished basement	52.50	Block or concrete walls, waterproofed, reinforced concrete slab	Gypsum or plaster, acoustic tile, vinyl composition, carpet, stairwell	Good lighting and outlets, half bath, partitioned laundry room	None

NOTES: Costs given above are for row house end units having three finished walls exposed and one blind wall. Deduct 3% for inside row house units having two blind walls. Add 3% for detached houses having all walls exposed and finished. For inside basements (having two common walls), deduct 7%.

For basement living units, use 80% of comparable above ground base costs. For semi-basement units, use 90%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HIGH-RISE ROW (TOWN) HOUSES

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

BUILT-IN APPLIANCES: For individual listing, see Segregated Cost, Section SEG 1.

	LOW	AVG.	GOOD	EXCL.
Allowance (if not itemized)	$1,820	$4,150	$7,550	$12,800

ELEVATORS: A small elevator with simple call system and push-button control, four passenger cab and two or three stops costs $64,750 to $106,000.

ELEVATOR STOPS: For basement stops, add $9,550 to $14,400 per stop.

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$ 11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete . .	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades .	29.50	36.00	44.25	54.00
Add for roofs or awnings .	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork). . .	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector. .	20.75	Heat pump system	25.50	Pkg. refrig. . .	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers. $331 to $535 per MCFM capacity	
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area Sq. Ft./Story	AVERAGE PERIMETER 200	250	300	350	400	450	500	550	600	650	700	750	800	850	Average Floor Area Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.175	1.206	1.237	1.268	1.299	1.329	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.063	1.083	1.103	1.123	1.144	1.165	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.005	1.021	1.037	1.052	1.068	1.083	1.098	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.972	.984	.997	1.009	1.022	1.034	1.047	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.949	.959	.970	.980	.990	1.000	1.010	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.933	.942	.951	.959	.968	.977	.986	**14,000**
16,000	-----	-----	-----	-----	.898	.906	.913	.921	.929	.937	.944	.952	.959	.967	**16,000**
18,000	-----	-----	-----	-----	.890	.897	.904	.911	.917	.925	.932	.939	.945	.952	**18,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.904	.910	.916	.922	.929	.935	.941	**20,000**
22,000	-----	-----	-----	-----	-----	-----	.892	.898	.903	.909	.915	.920	.926	.932	**22,000**
25,000	-----	-----	-----	-----	-----	-----	.883	.888	.892	.897	.903	.907	.912	.916	**25,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOMES FOR THE ELDERLY



GOOD CLASS A



GOOD CLASS D

OCCUPANCY DESCRIPTION: These structures include congregate housing for the elderly, typically consisting of one or two room suites with limited individual and common kitchen and dining areas, lounges, nursing and therapy rooms. The better qualities may also include alarm systems. They may be built of all classes. They may also include some special plumbing fixtures.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Elevators are included in costs designated with an asterisk **(*).**

NOT INCLUDED IN COSTS: Sprinklers, kitchen equipment, balconies, therapy or recreational equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Good	$ 314.00	Face brick, metal and glass, architectural concrete	Plaster or drywall, carpeting, vinyl composition, ceramic tile	*Good lighting, alarm system, some special plumbing fixtures	Hot and chilled water (zoned)
	Average	244.50	Brick, concrete or metal and glass, little ornamentation	Plaster or drywall, carpet, vinyl composition	*Adequate lighting/plumbing, some extras	Warm and cool air (zoned)
	Low cost	192.50	Concrete block or panels, little trim	Plaster or drywall, painted block, low cost carpet, vinyl composition	*Minimum lighting/plumbing	Hot water
B	Good	284.50	Face brick, metal and glass, architectural concrete	Plaster or drywall, carpeting, vinyl composition, ceramic tile	*Good lighting, alarm system, some special plumbing fixtures	Hot and chilled water (zoned)
	Average	221.00	Brick, concrete or metal and glass, some ornamentation	Plaster or drywall, some exposed block, carpeting, vinyl composition	*Adequate lighting/plumbing, some extras	Warm and cool air (zoned)
	Low cost	173.00	Concrete block or panels, little trim	Exposed block, acoustic tile, drywall, vinyl composition	*Minimum lighting/plumbing	Hot water
A-B	Finished basement	138.00	Finished interior	Plaster or drywall, vinyl comp., therapy and housekeeping rooms	Adequate lighting/plumbing, high-voltage outlets	Hot water
C	Good	236.50	Face brick, metal or concrete and glass, good design	Plaster or drywall, vinyl comp., some carpeting and ceramic tile	*Good lighting, alarm system, some special plumbing fixtures	Warm and cool air (zoned)
	Average	177.50	Brick or block, concrete panels, little ornamentation	Plaster or drywall, some exposed block, carpeting, vinyl composition	*Adequate lighting/plumbing, few extras	Hot water
	Low cost	134.50	Brick, block, concrete panels, very plain	Exposed block, drywall, vinyl composition	*Minimum lighting/plumbing	Forced air
D	Good	229.50	Brick veneer, best stucco or siding, good trim	Plaster or drywall, vinyl comp., some carpeting and ceramic tile	*Good lighting, alarm system, some special plumbing fixtures	Warm and cool air (zoned)
	Average	171.00	Brick veneer, good stucco or siding, some trim	Plaster or drywall, acoustic tile, vinyl composition	*Adequate lighting/plumbing, few extras	Hot water
	Low cost	129.00	Stucco or siding	Drywall, vinyl composition	*Minimum lighting/plumbing	Forced air
S	Good	224.00	Best sandwich panels, good fenestration and ornamentation	Drywall, good finish, good carpet and vinyl composition	*Good lighting, alarm system, some special plumbing fixtures	Warm and cool air (zoned)
	Average	165.50	Sandwich panels, little trim	Drywall, carpet, vinyl composition	*Adequate lighting/plumbing	Hot water
CDS	Finished basement	96.50	Finished interior	Plaster or drywall, asphalt tile, therapy and housekeeping rooms	Adequate lighting/plumbing, high-voltage outlets	Forced air

For basement apartments, use 80% of comparable above ground units. For semi-basement apartments, use 90%.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOMES FOR THE ELDERLY

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs	Classes C/D/S	Sq. Ft. Costs
Good	$ 8.04	Good	$ 5.02
Average	6.01	Average	3.97
Low Cost	4.59	Low Cost	3.10

ELEVATOR STOPS: For basement stops, add $ 9,550 to $14,400 per stop.

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	11	1.027
9	.973	12	1.055
10	1.000 (base)		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – CONVALESCENT (NURSING HOMES)



GOOD CLASS D



AVERAGE CLASS D

OCCUPANCY DESCRIPTION: This occupancy includes nursing homes and buildings of hospital-type construction which give nursing care. They are designed for bed care and nursing care for ambulatory patients. These facilities do not have equipment for surgical care and treatment. Exterior and interior finishes are very similar to hospitals in terms of the materials used. While most have some type of combined heating and cooling system, lower quality units may have heating only.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit, treatment and therapy rooms, service and administration areas, nurses' stations and signaling systems commensurate with the building class and quality. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, furniture, and equipment such as therapy or kitchen equipment, etc., which are not permanently attached.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Good	$ 418.00	Face brick, stone trim, good metal or concrete with good glazing	Plaster or drywall, vinyl and ceramic walls, carpet and vinyl floors	*Signal system, therapy facilities, good lighting and plumbing	Hot and chilled water (zoned)
	Average	344.00	Brick, concrete, metal and glass, little ornamentation	Hospital without surgical facilities, good lounge areas	*Signal system, therapy facilities, adequate lighting and plumbing	Hot and chilled water (zoned)
B	Good	383.00	Face brick, stone trim, good metal or concrete with good glazing	Plaster or drywall, vinyl and ceramic walls, carpet and vinyl floors	*Signal system, therapy facilities, good lighting and plumbing	Hot and chilled water (zoned)
	Average	318.00	Brick, concrete, metal and glass, little ornamentation	Hospital without surgical facilities, acoustic and vinyl tile	*Signal system, therapy facilities, adequate lighting and plumbing	Hot and chilled water (zoned)
A-B	Finished basement	211.00	Reinforced concrete, plaster interior	Hospital finish, administrative and technical facilities	Adequate lighting and plumbing for skilled nursing facilities	Warm and cool air (zoned)
C	Excellent	374.00	Highly ornamental metal or concrete panels and glass	Plaster, vinyl and ceramic wall finishes, carpet and vinyl floors	Signal system, therapy facilities, good lighting and plumbing	Hot and chilled water (zoned)
	Good	284.00	Metal and glass, brick, stone trim, some ornamentation	Plaster or drywall, enamel or vinyl walls, vinyl floor, some carpet	Signal system, therapy facilities, good lighting and plumbing	Warm and cool air (zoned)
	Average	212.50	Brick, block, some metal and glass, some ornamentation	Plaster or drywall, acoustic ceilings, vinyl composition	Signal system, therapy facilities, adequate lighting and plumbing	Package A.C.
	Low cost	162.50	Brick, block, tilt-up, little ornamentation, simple entrance	Painted walls, some plaster or drywall, acoustic and asphalt tile	Minimum lighting and plumbing, minimum hospital facilities	Forced air
D	Excellent	341.00	Face brick, stone, metal and glass, highly ornamental	Plaster, vinyl and ceramic wall finishes, carpet and vinyl floors	Signal system, therapy facilities, good lighting and plumbing	Warm and cool air (zoned)
	Good	272.00	Brick veneer, EIFS, metal and glass, good entrance and trim	Plaster or drywall, good ceilings and floor covering	Signal system, therapy facilities, good lighting and plumbing	Warm and cool air (zoned)
	Average	203.00	Good stucco or wood siding with brick or stone trim	Plaster or drywall, acoustic ceilings, vinyl composition	Adequate lighting and plumbing, signal system, some extras	Package A.C.
	Low cost	155.00	Stucco or siding, little trim or ornamentation	Drywall, acoustic and asphalt tile, minimum detail	Adequate lighting and plumbing, minimum extra facilities	Forced air
D POLE	Low cost	149.00	Pole frame, good metal panels, finished inside, little trim	Drywall, acoustic and asphalt tile, minimum detail	Adequate lighting and plumbing, minimum extra facilities	Forced air
S	Average	200.50	Sandwich panels with brick or stone trim	Drywall, acoustic ceilings, vinyl composition	Adequate lighting and plumbing, signal system, some extras	Package A.C.
	Low cost	152.50	Insulated metal panels, little or no ornamentation	Drywall, acoustic and asphalt tile, minimum detail	Adequate lighting and plumbing, minimum extra facilities	Forced air
CDS	Finished basement	130.00	Reinforced concrete, plaster or drywall interior	Hospital finish, administrative and technical facilities	Adequate lighting and plumbing for skilled nursing facilities	Forced air

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – CONVALESCENT (NURSING HOMES)

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include service elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs, see Section UIP 8.

Classes A/B	Sq. Ft. Costs
Good	$ 8.41
Average	5.90

ELEVATOR STOPS: For basement or mezzanine elevator stops, add $9,400 to $14,400 per stop.

A small passenger elevator with simple call system and push button control, four passenger cab and two or three stops, costs $68,000 to $112,000.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
2,000	$ 5.95	$ 7.69	$ 9.94	$ 12.85
5,000	5.19	6.60	8.45	10.75
10,000	4.66	5.90	7.49	9.48
15,000	4.33	5.48	6.95	8.77
20,000	4.15	5.24	6.60	8.32
30,000	3.92	4.90	6.13	7.68
50,000	3.62	4.49	5.59	6.99
75,000	3.39	4.20	5.22	6.46
100,000	3.27	4.01	4.96	6.13

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 31.75	$ 41.00	$ 53.00	$ 69.00
Steel	29.75	40.50	55.00	75.50
Wood	25.25	33.75	45.00	60.00
Add for ornate finishes, balustrades	27.50	34.00	41.75	51.00
Add for roofs or awnings	15.20	20.15	26.75	35.75

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 17.20	Package A.C. (short ductwork)	$ 27.25	Central refrigeration (zoned)	$ 21.15
Electric wall heaters	5.15	Warm and cool air (zoned)	44.50	package (short ductwork)	14.90
Forced air furnace	19.35	Hot/chilled water (zoned)	63.00	Central evaporative	8.19
Hot water, baseboard/convector	29.75	Heat pump system	37.25	Pkg. refrig.	$ 2,950 to $ 3,800 per ton capacity
Space heaters, with fan	6.34			Evap. coolers.	$ 424 to $ 745 per MCFM capacity
radiant	7.28				
Steam (including boiler)	28.00				
without boiler	25.75	Small indiv. heat pumps cost	$ 2,600 to $ 3,475	**VENTILATION ONLY**	
Wall or floor furnace	5.62	per ton of rated capacity.		Vent. (blowers/ducts)	$ 5.04

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.900	12	1.000 (base)
9	.928	13	1.023
10	.953	14	1.046
11	.977		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	150	175	200	250	300	400	500	600	700	800	1000	1200	1400	1600	Sq. Ft./Story
2,000	1.040	1.072	1.105	1.168	1.235	1.364	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
5,000	-----	.936	.949	.975	1.000	1.052	1.105	1.155	-----	-----	-----	-----	-----	-----	**5,000**
10,000	-----	-----	-----	.910	.923	.949	.975	1.000	1.027	1.052	1.105	1.155	-----	-----	**10,000**
14,000	-----	-----	-----	-----	.900	.920	.938	.956	.975	.993	1.030	1.067	1.105	1.140	**14,000**
16,000	-----	-----	-----	-----	-----	.910	.926	.942	.958	.975	1.007	1.040	1.075	1.105	**16,000**
20,000	-----	-----	-----	-----	-----	-----	.910	.923	.936	.949	.975	1.000	1.027	1.052	**20,000**
25,000	-----	-----	-----	-----	-----	-----	.897	.908	.918	.928	.948	.969	.990	1.011	**25,000**
30,000	-----	-----	-----	-----	-----	-----	-----	.897	.906	.915	.932	.949	.965	.983	**30,000**
35,000	-----	-----	-----	-----	-----	-----	-----	-----	.897	.904	.919	.934	.949	.963	**35,000**
40,000	-----	-----	-----	-----	-----	-----	-----	-----	.890	.897	.910	.923	.936	.949	**40,000**
50,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	.887	.897	.908	.918	.928	**50,000**
75,000	-----	-----	-----	-----	-----	-----	-----	-----	-----	.873	.879	.885	.892	.900	**75,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – GENERAL



GOOD CLASS B



AVERAGE CLASS B

OCCUPANCY DESCRIPTION: Designed as complete health care facilities, they typically include a number of different health services within one building or groups of buildings. Typical areas found include diagnostic, surgery, patient care, delivery, nursery, emergency, administration, service areas and pharmacies. The amount of actual area associated with all or some of these specific areas varies with the size of the building and the number of people serviced by the hospital. The types of facilities available in the hospital generally are commensurate with the overall quality of the general structure. Exterior finishes vary with decorative marble, granite, concrete and metal and glass panels in the better qualities and brick, block, masonry veneers with very little ornamentation at the lower quality. Plaster or drywall is found on the interiors, with suspended acoustic tile ceilings. Floor finishes are commonly ceramic, vinyl or some other type of resilient floor cover. Signal systems, special oxygen piping and pneumatic conveyors are commonly found. They conform to the overall quality and design of the structure. Most hospitals have complete heating, ventilating and air conditioning systems.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit plus Group I equipment which is installed in or attached to the building and is usually a part of the general contract, such as built-in cabinets and nursing stations. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinkler systems or exterior balconies. Group II equipment which may be installed and becomes a part of the real property, but is typically not a part of the general contract such as autoclaves, permanent surgical lights and other equipment, and Group III equipment which is movable personal property such as furniture, fixtures, instruments, etc.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Excellent	$ 762.00	Marble, granite, best metal and glass, highly decorative	Plaster, vinyl and tile wall surfaces, best ceilings and floors	*Oxygen, pneumatic conveyor, signal, much automation	Complete H.V.A.C.
	Good	579.50	Brick, metal and glass, stone trim, some ornamentation	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl, rubber tile	*Signal system, oxygen piping, pneumatic conveyors	Complete H.V.A.C.
	Average	446.00	Metal and glass, concrete, brick panels, little ornamentation	Drywall, acoustic ceilings, vinyl and ceramic floors, linoleum	*Signal system, oxygen piping, adequate lighting and plumbing	Complete H.V.A.C.
	Low cost	343.00	Concrete panels, brick, very plain, small entrance	Drywall, acoustic ceilings, vinyl composition, minimum detail	*Signal system, adequate lighting and plumbing	Complete H.V.A.C.
B	Excellent	695.50	Marble, granite, face brick, highly decorative	Plaster, vinyl and tile wall surfaces, best ceilings and floors	*Oxygen, pneumatic conveyor, signal, much automation	Complete H.V.A.C.
	Good	533.50	Brick, metal and glass, stone trim, some ornamentation	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl floors	*Signal system, oxygen piping, pneumatic conveyors	Complete H.V.A.C.
	Average	411.00	Metal and glass, concrete, brick, little ornamentation	Drywall, acoustic ceilings, vinyl and ceramic floors, linoleum	*Signal system, oxygen piping, adequate lighting and plumbing	Complete H.V.A.C.
	Low cost	316.50	Concrete panels, brick, very plain, small entrance	Drywall, acoustic ceilings, vinyl composition, minimum detail	*Signal system, adequate lighting and plumbing	Complete H.V.A.C.
A-B	Finished basement	245.50	Reinforced concrete, plaster interior	Hospital finish, administrative and technical facilities and services	Adequate lighting and plumbing for hospital facilities	Complete H.V.A.C.
	Parking basement	100.50	Unfinished interior	Unfinished, small service area	Minimum lighting/plumbing	Ventilation
C	Excellent	556.00	Stone ashlar, best metal or concrete and glass panels	Plaster, vinyl and tile wall surfaces, best ceilings and floors	*Oxygen, pneumatic conveyor, signal, much automation	Complete H.V.A.C.
	Good	417.50	Brick, metal and glass, stone, good ornamentation	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl floors	*Signal system, oxygen piping, good lighting and plumbing	Complete H.V.A.C.
	Average	314.50	Metal and glass, brick, block, concrete, little ornamentation	Plaster or drywall, acoustic ceilings, vinyl or tile floors, some ceramic	*Signal system, oxygen piping, adequate lighting and plumbing	Complete H.V.A.C.
	Low cost	234.50	Brick, block, tilt-up, small entrance, very plain	Plaster or drywall, acoustic tile, vinyl composition, minimum detail	Adequate lighting and plumbing, signal system, few extras	Complete H.V.A.C.
D	Good	395.00	Brick veneer, EIFS, good entrance and ornamentation	Plaster or drywall, enamel or vinyl, ceramic tile and vinyl floors	Signal system, oxygen piping, good lighting and plumbing	Complete H.V.A.C.
	Average	298.50	Brick veneer, good stucco or siding with brick or stone trim	Plaster or drywall, acoustic ceilings, vinyl or tile floors, some ceramic	Adequate lighting and plumbing, signal system, some extras	Complete H.V.A.C.
	Low cost	225.50	Stucco or siding, little trim or ornamentation	Drywall or plaster, acoustic tile, vinyl composition, minimum extras	Adequate lighting and plumbing, minimum signal system	Complete H.V.A.C.
S	Low cost	223.00	Insulated panels	Metal or drywall, acoustic tile ceilings, vinyl composition	Minimum general hospital facilities	Complete H.V.A.C.
CDS†	Finished basement	172.50	Reinforced concrete, plaster or drywall interior	Hospital finish, administrative and technical facilities and services	Adequate lighting and plumbing for hospital facilities	Complete H.V.A.C.
	Parking basement	67.00	Unfinished interior	Finished ceiling, concrete floor	Minimum lighting, drains	Ventilation

†For fire-resistant Type I basements, with concrete slab separation under Class C, D or S units, add $ 8.54 per square foot.
Finished Basements with Complete H.V.A.C., default is Low-quality.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – GENERAL

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include service elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs, see Section UIP 8.

Classes A/B	Sq. Ft. Costs	Classes C	Sq. Ft. Costs
Excellent	$ 18.85	Excellent	$ 9.57
Good	12.75	Good	6.03
Average	8.67	Average	3.83
Low cost	5.90		

ELEVATOR STOPS: For basement or mezzanine elevator stops, add $9,400 to $14,400 per stop.

A small passenger elevator with simple call system and push button control, four passenger cab and two or three stops, costs $68,000 to $112,000.

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 5.19	$ 6.60	$ 8.45	$ 10.75
10,000	4.66	5.90	7.49	9.48
15,000	4.33	5.48	6.95	8.77
20,000	4.15	5.24	6.60	8.32
30,000	3.92	4.90	6.13	7.68
50,000	3.62	4.49	5.59	6.99
75,000	3.39	4.20	5.22	6.46
100,000	3.27	4.01	4.96	6.13

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 31.75	$ 41.00	$ 53.00	$ 69.00
Steel	29.75	40.50	55.00	75.50
Wood	25.25	33.75	45.00	60.00
Add for ornate finishes, balustrades	27.50	34.00	41.75	51.00
Add for roofs or awnings	15.20	20.15	26.75	35.75

2

HEATING AND COOLING

The basement costs include low-cost complete H.V.A.C. These costs are averages of total installed costs of the entire heating or cooling installation, including its prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated costs.

COMPLETE H.V.A.C Classes A/B	Sq. Ft. Costs	COMPLETE H.V.A.C Classes C/D/S	Sq. Ft. Costs
Excellent	$ 94.50	Excellent	$ 82.00
Good	73.00	Good	64.50
Average	57.50	Average	51.00
Low cost	45.00	Low cost	39.50

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
10	.953	14	1.046
11	.977	15	1.069
12	1.000 (base)	16	1.092
13	1.023		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	200	250	300	400	500	600	700	800	1000	1200	1400	1600	1800	2000	Sq. Ft./Story
5,000	.949	.975	1.000	1.052	1.105	1.155	-----	-----	-----	-----	-----	-----	-----	-----	5,000
10,000	-----	.910	.923	.949	.975	1.000	1.027	1.052	1.105	1.155	-----	-----	-----	-----	10,000
14,000	-----	-----	.900	.920	.938	.956	.975	.993	1.030	1.067	1.105	1.140	-----	-----	14,000
16,000	-----	-----	-----	.910	.926	.942	.958	.975	1.007	1.040	1.075	1.105	-----	-----	16,000
20,000	-----	-----	-----	-----	.910	.923	.936	.949	.975	1.000	1.027	1.052	1.078	1.105	20,000
25,000	-----	-----	-----	-----	.897	.908	.918	.928	.948	.969	.990	1.011	1.032	1.052	25,000
30,000	-----	-----	-----	-----	-----	.897	.906	.915	.932	.949	.965	.983	1.000	1.018	30,000
35,000	-----	-----	-----	-----	-----	-----	.897	.904	.919	.934	.949	.963	.978	.993	35,000
40,000	-----	-----	-----	-----	-----	-----	.890	.897	.910	.923	.936	.949	.962	.975	40,000
50,000	-----	-----	-----	-----	-----	-----	-----	.887	.897	.908	.918	.928	.938	.948	50,000
75,000	-----	-----	-----	-----	-----	-----	-----	.873	.879	.885	.892	.900	.908	.915	75,000
100,000	-----	-----	-----	-----	-----	-----	-----	.866	.871	.876	.881	.887	.892	.897	100,000

5 **USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – SURGICAL CENTERS



AVERAGE CLASS A-B



AVERAGE CLASS C

OCCUPANCY DESCRIPTION: These structures are freestanding ambulatory outpatient or same-day surgery facilities. They include clinical surgery, diagnostic, lab, administrative and public areas consistent with the quality level. Operating rooms normally take up 2.5% of the area. Cost includes fixed equipment only. Specialized radiation, imaging treatment and diagnostic centers are represented by this occupancy.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit.

NOT INCLUDED IN COSTS: Sprinklers, kitchen equipment, balconies, therapy or recreational equipment.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Good	$ 567.00	Brick, metal and glass, stone trim, some ornamentation	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl, rubber tile	Good lighting and plumbing, best surgical, good imaging center	Complete H.V.A.C.
	Average	417.00	Brick, concrete panels, metal and glass, little ornamentation	Drywall, vinyl & tile wall surfaces, good ceilings and floors, some shielding	Adequate lighting and plumbing for surgical facilities, some extras	Complete H.V.A.C.
A-B	Finished basement	287.50	Heavy reinforced concrete, plaster interior	Outpatient finish, heavy shielding, imaging and radiation, some offices	Adequate lighting and plumbing for diagnostic facilities	Complete H.V.A.C.
C	Excellent	634.00	Stone ashlar, best metal or concrete and glass panels	Plaster, vinyl and tile wall surfaces, best ceilings and floors	Best diagnostic and research, best radiation therapy	Complete H.V.A.C.
	Good	443.50	Brick, metal and glass, stone, good concrete, good entrance	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl, shielding	Good lighting and plumbing, small lab, some extras, good imaging	Complete H.V.A.C.
	Average	309.50	Metal and glass, brick, block, concrete, little ornamentation	Plaster or drywall, acoustic ceilings, vinyl or tile floors, some carpet	Adequate lighting and plumbing for surgical or cancer facilities	Complete H.V.A.C.
	Fair	259.00	Brick, ornamental block, some metal and glass and trim	Plaster or drywall, acoustic ceilings, vinyl composition, some carpet	Adequate therapeutic, wellness facility, good dialysis	Complete H.V.A.C.
	Low cost	217.00	Brick, block, tilt-up, small entrance, very plain	Plaster or drywall, acoustic tile, vinyl composition, minimum detail	Minimum treatment facilities, dialysis, some diagnostic	Complete H.V.A.C.
D	Excellent	602.50	Ashlar stone veneer, best metal and glass panels	Plaster, vinyl and tile wall surfaces, best ceilings and floors	Best diagnostic and research, best radiation therapy	Complete H.V.A.C.
	Good	421.50	Face brick or stone veneer, good entrance and trim	Plaster or drywall, best enamels or vinyl walls, ceramic, vinyl, shielding	Good lighting and plumbing, small lab, some extras, good imaging	Complete H.V.A.C.
	Average	296.50	Brick veneer, EIFS, ornamental stucco, metal and glass	Plaster or drywall, acoustic ceilings, vinyl or tile floors, carpet	Adequate lighting and plumbing for surgical or cancer facilities	Complete H.V.A.C.
	Fair	249.50	Siding, brick veneer, some metal and glass and trim	Plaster or drywall, acoustic ceilings, vinyl composition, some carpet	Adequate therapeutic, wellness facility, good dialysis	Complete H.V.A.C.
	Low cost	208.00	Stucco or siding, little trim or ornamentation	Drywall or plaster, acoustic tile, vinyl composition, minimum extras	Adequate lighting and plumbing, minimum diagnostic facilities	Complete H.V.A.C.
S	Average	294.00	Insulated panels, some trim	Plaster or drywall, acoustic ceilings, vinyl or tile floors, some carpet	Adequate lighting and plumbing for surgical or cancer facilities	Complete H.V.A.C.
	Fair	247.00	Insulated panels, some trim	Plaster or drywall, acoustic ceilings, vinyl composition, some carpet	Adequate therapeutic, wellness facility, good dialysis	Complete H.V.A.C.
	Low cost	207.00	Insulated panels	Metal or drywall, acoustic tile ceilings, vinyl composition, minimum extras	Minimum treatment facilities, dialysis, some diagnostic	Complete H.V.A.C.
CDS	Finished basement	224.50	Heavy reinforced concrete, plaster or drywall interior	Outpatient finish, heavy shielding, imaging and radiation, some offices	Adequate lighting and plumbing for diagnostic facilities	Complete H.V.A.C.

Finished Basements with Complete H.V.A.C., default is Low-quality.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – SURGICAL CENTERS

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: A small passenger elevator with simple call system and push-button control, four-passenger cab, and two or three stops, costs $ 68,000 to $ 112,000.

CANOPIES: Large entrance marquees or carport canopies.

	LOW	AVG.	GOOD	EXCL.
Wood frame	$ 39.00	$ 49.00	$ 60.00	$ 75.50
Light false-mansard	21.50	26.75	33.00	41.25
Steel frame	47.75	60.00	76.50	96.50
Light false-mansard	26.25	33.00	41.75	53.00

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 31.75	$ 41.00	$ 53.00	$ 69.00
Steel	29.75	40.50	55.00	75.50
Wood	25.25	33.75	45.00	60.00
Add for ornate finishes, balustrades	27.50	34.00	41.75	51.00
Add for roofs or awnings	15.20	20.15	26.75	35.75

SPRINKLERS: Apply to sprinklered area.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
2,000	$ 5.95	$ 7.69	$ 9.94	$ 12.85
5,000	5.19	6.60	8.45	10.75
10,000	4.66	5.90	7.49	9.48
15,000	4.33	5.48	6.95	8.77
20,000	4.15	5.24	6.60	8.32
30,000	3.92	4.90	6.13	7.68
50,000	3.62	4.49	5.59	6.99
75,000	3.39	4.20	5.22	6.46
100,000	3.27	4.01	4.96	6.13

2

HEATING AND COOLING

The basement costs include low-cost complete H.V.A.C. These costs are averages of total installed costs of the entire heating or cooling installation, including its prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated costs.

COMPLETE H.V.A.C Classes A/B	Sq. Ft. Costs
Excellent	$ 94.50
Good	73.00
Average	57.50
Low cost	45.00

COMPLETE H.V.A.C Classes C/D/S	Sq. Ft. Costs
Excellent	$ 82.00
Good	64.50
Average	51.00
Low cost	39.50

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Add .5% (1/2%) for each story over three, above ground, to all base costs.

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
10	.953	14	1.046
11	.977	15	1.069
12	1.000 (base)	16	1.092
13	1.023		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	175	200	250	300	400	500	600	700	800	1000	1200	1400	1600	1800	Sq. Ft./Story
2,000	1.072	1.105	1.168	1.235	1.364	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000
5,000	.936	.949	.975	1.000	1.052	1.105	1.155	-----	-----	-----	-----	-----	-----	-----	5,000
10,000	-----	-----	.910	.923	.949	.975	1.000	1.027	1.052	1.105	1.155	-----	-----	-----	10,000
14,000	-----	-----	-----	.900	.920	.938	.956	.975	.993	1.030	1.067	1.105	1.140	-----	14,000
20,000	-----	-----	-----	-----	-----	.910	.923	.936	.949	.975	1.000	1.027	1.052	1.078	20,000
25,000	-----	-----	-----	-----	-----	.897	.908	.918	.928	.948	.969	.990	1.011	1.032	25,000
30,000	-----	-----	-----	-----	-----	-----	.897	.906	.915	.932	.949	.965	.983	1.000	30,000
35,000	-----	-----	-----	-----	-----	-----	-----	.897	.904	.919	.934	.949	.963	.978	35,000
40,000	-----	-----	-----	-----	-----	-----	-----	.890	.897	.910	.923	.936	.949	.962	40,000
50,000	-----	-----	-----	-----	-----	-----	-----	-----	.887	.897	.908	.918	.928	.938	50,000
75,000	-----	-----	-----	-----	-----	-----	-----	-----	.873	.879	.885	.892	.900	.908	75,000
100,000	-----	-----	-----	-----	-----	-----	-----	-----	.866	.871	.876	.881	.887	.892	100,000

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – VETERINARY



EXCELLENT CLASS D



GOOD CLASS D

OCCUPANCY DESCRIPTION: These structures are designed for the medical and surgical care and treatment of small animals. Floor finish is generally resilient covering. Wall finishes, either plaster or drywall, are plain. Good-quality facilities also have some lab and X-ray areas. Individual cubicles or rooms within the structure include adequate lighting and plumbing.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit, X-ray rooms. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, X-ray equipment, cages, runs or open shelters.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A-B	Average	$ 316.00	Brick, precast panels, some trim	Plaster or drywall, vinyl, laboratory and X-ray facilities	*Good lighting and plumbing, power outlets	Hot and chilled water (zoned)
C	Excellent	344.50	Face brick, block or concrete, good entrance and trim	Plaster, ceramic, vinyl and carpet finishes, indoor exercise facilities	Good lighting and plumbing, lab, diagnostic and treatment facilities	Warm and cool air (zoned)
	Good	261.00	Face brick, ornamental block, good trim and fenestration	Plaster or drywall, vinyl, good lab and X-ray facilities	Good lighting and plumbing, power outlets	Package A.C.
	Average	202.50	Brick, partially finished interior, some trim	Plaster or drywall, vinyl composition, cages and runs not included	Adequate lighting, fluoroscope outlets, adequate plumbing	Forced air
	Low cost	149.50	Block or tilt-up, very plain	Drywall, some asphalt tile floor	Minimum lighting and plumbing	Space heaters
D	Excellent	331.50	Face brick or stone veneer, best siding, good entrance and trim	Plaster, ceramic, vinyl and carpet finishes, indoor exercise facilities	Good lighting and plumbing, lab, diagnostic and treatment facilities	Warm and cool air (zoned)
	Good	251.00	Good brick veneer, trim and fenestration	Plaster or drywall, vinyl, good laboratory and X-ray facilities	Good lighting and plumbing, power outlets	Package A.C.
	Average	193.50	Stucco or siding, brick trim or low cost brick veneer	Plaster or drywall, vinyl composition, cages and runs not included	Adequate lighting, fluoroscope outlets, adequate plumbing	Forced air
	Low cost	141.50	Stucco or siding, finished interior	Drywall, some asphalt tile floor	Minimum lighting and plumbing	Space heaters
D POLE	Low cost	129.50	Pole frame, metal single wall, very plain	Drywall, some asphalt tile floor, cages and runs not included	Minimum lighting and plumbing	Space heaters
S	Average	184.50	Insulated sandwich panels or metal with finished interior	Drywall, vinyl composition, cages and runs not included	Adequate lighting, fluoroscope outlets, adequate plumbing	Forced air
	Low cost	133.00	Metal on light frame, very plain	Drywall, some asphalt tile floor	Minimum lighting and plumbing	Space heaters
CDS	Utility basement	48.50	Painted interior	Paint only, few partitions	Minimum lighting, drains	None

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOSPITALS – VETERINARY

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked.

For detailed costs, see Section UIP 8.

Classes A/B	Sq. Ft. Costs
Average	$ 5.98

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
1,500	$ 6.26	$ 8.11	$ 10.50	$ 13.60
2,000	5.95	7.69	9.94	12.85
5,000	5.19	6.60	8.45	10.75
10,000	4.66	5.90	7.49	9.48
15,000	4.33	5.48	6.95	8.77
20,000	4.15	5.24	6.60	8.32
30,000	3.92	4.90	6.13	7.68

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 17.20	Package A.C. (short ductwork)	$ 27.25	Central refrigeration (zoned)	$ 21.15
Electric wall heaters	5.15	Warm and cool air (zoned)	44.50	package (short ductwork)	14.90
Forced air furnace	19.35	Hot/chilled water (zoned)	63.00	Central evaporative	8.19
Hot water, baseboard/convector	29.75	Heat pump system	37.25	Pkg. refrig.	$ 2,950 to $ 3,800 per ton capacity
Space heaters, with fan	6.34			Evap. coolers.	$ 424 to $ 745 per MCFM capacity
radiant	7.28				
Steam (including boiler)	28.00				
without boiler	25.75	Small indiv. heat pumps cost	$ 2,600 to $ 3,475	**VENTILATION ONLY**	
Wall or floor furnace	5.62	per ton of rated capacity.		Vent. (blowers/ducts)	$ 5.04

3

HEIGHT REFINEMENTS

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.900	14	1.046
9	.928	15	1.069
10	.953	16	1.092
11	.977	18	1.138
12	1.000 (base)	20	1.184
13	1.023		

4

Average Floor Area	AVERAGE PERIMETER														Average Floor Area
Sq. Ft./Story	125	150	175	200	250	300	400	500	600	700	800	1000	1200	1400	Sq. Ft./Story
1,000	1.168	1.235	1.299	1.364	1.494	1.624	1.884	-----	-----	-----	-----	-----	-----	-----	**1,000**
2,000	1.007	1.040	1.072	1.105	1.168	1.235	1.364	-----	-----	-----	-----	-----	-----	-----	**2,000**
5,000	-----	-----	.936	.949	.975	1.000	1.052	1.105	1.155	-----	-----	-----	-----	-----	**5,000**
6,000	-----	-----	-----	.932	.952	.975	1.018	1.061	1.105	1.146	-----	-----	-----	-----	**6,000**
8,000	-----	-----	-----	-----	.926	.942	.975	1.007	1.040	1.072	1.105	-----	-----	-----	**8,000**
10,000	-----	-----	-----	-----	.910	.923	.949	.975	1.000	1.027	1.052	1.105	1.155	-----	**10,000**
12,000	-----	-----	-----	-----	-----	.910	.932	.952	.975	.997	1.018	1.061	1.105	1.146	**12,000**
14,000	-----	-----	-----	-----	-----	.900	.920	.938	.956	.975	.993	1.030	1.067	1.105	**14,000**
18,000	-----	-----	-----	-----	-----	-----	.903	.918	.932	.946	.960	.990	1.018	1.046	**18,000**
20,000	-----	-----	-----	-----	-----	-----	-----	.910	.923	.936	.949	.975	1.000	1.027	**20,000**
25,000	-----	-----	-----	-----	-----	-----	-----	.897	.908	.918	.928	.948	.969	.990	**25,000**
30,000	-----	-----	-----	-----	-----	-----	-----	-----	.897	.906	.915	.932	.949	.965	**30,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE



EXCELLENT CLASS A



EXCELLENT CLASS B

OCCUPANCY DESCRIPTION: Structures are three or more stories in height, having multiple sleeping units without individual kitchen facilities. Where the ground floor is entirely divided into stores and shops, that floor should be priced from Stores and Commercial Buildings. The quality of the hotel is determined primarily from the interior refinements. The best quality hotels have a large amount of high cost wall cover and floor finish in the open and public areas. Sleeping rooms also contain high cost wall cover as part of the interior finish. The size of the support facilities, i.e., restaurants, etc., is largely dependent on the size and capacity of the facility rather than the quality of the improvements.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Excellent	$ 388.50	Best metal or stone, heat-absorbent or double glazing	Fine detail and carpet, good plaster and wall coverings	*Best lighting, radio and TV circuits, top-quality plumbing	Hot and chilled water (zoned)
	Good	320.00	Face brick, metal or concrete panels, individual design	Good detail, carpeted, highly decorated public rooms	*Good lighting, radio and TV circuits, good plumbing fixtures	Hot and chilled water (zoned)
	Average	251.00	Face brick, metal or concrete panels, plain exterior	Typical good transient or average business hotel, adequate public rooms	*Lighting/plumbing above code, standard fixtures	Warm and cool air (zoned)
	Low cost	198.00	Brick, concrete block, metal stud panels, little ornamentation	Small lobby, coffee shop, minimum transient facilities	*Minimum lighting/plumbing, few extras	Hot water
B	Excellent	352.50	Best metal or stone, heat-absorbent or double glazing	Fine detail, carpeted, highly decorated public rooms	*Best lighting, radio and TV circuits, good plumbing fixtures	Hot and chilled water (zoned)
	Good	290.50	Face brick, metal or concrete panels, individual design	Good detail, carpeted, highly decorated public rooms	*Good lighting, radio and TV circuits, good plumbing fixtures	Hot and chilled water (zoned)
	Average	226.00	Face brick, metal, concrete or stucco panels, plain exterior	Typical good transient or average business hotel, adequate public rooms	*Lighting/plumbing above code, standard fixtures	Warm and cool air (zoned)
	Low cost	177.50	Brick, concrete block, synthetic plaster, little ornamentation	Small lobby, coffee shop, minimum transient facilities	*Minimum lighting/plumbing, few extras	Hot water
A-B	Finished basement	145.00	Plaster or drywall interior	Plaster or drywall, vinyl composition, acoustic ceiling, shops, service functions	Adequate lighting/plumbing, restrooms, utility rooms	Hot water
	Parking basement	82.50	Unfinished	No partitions or floor covering	Minimum lighting/plumbing	Ventilation
	Util. bsmt	75.00	Painted interior	Few partitions and fire walls	Utility lighting/plumbing	None
	Mezzanine	116.00	Not included	Typical hotel finish and detail	Adequate lighting/plumbing	In bldg. cost
C	Excellent	291.50	Best metal or concrete panels, stone, face brick	Fine detail and carpet, good plaster and wall coverings	*Excellent lighting, radio and TV circuits, quality plumbing	Hot and chilled water (zoned)
	Good	235.00	Brick, metal or concrete and glass, good trim and entrance	Plaster or drywall, carpeted, public rooms, good decorating and detail	*Good lighting/plumbing, radio and TV circuits	Warm and cool air (zoned)
	Average	197.50	Brick, stucco on block, some front ornamentation	Carpeted, plaster or drywall and painted masonry, adequate facilities	*All rooms with bath, adequate electric service	Heat pump system
	Low cost	155.00	Brick or concrete block	Few public rooms, small coffee shop	*Minimum lighting/plumbing	Individual heat pumps
D	Excellent	278.00	Best masonry veneer, metal and glass panels, highly decorative	Fine detail and carpet, good plaster and wall coverings	*Excellent lighting, radio and TV circuits, quality plumbing	Hot and chilled water (zoned)
	Good	224.00	Brick veneer, metal and glass, good entrance and trim	Good finishes, carpeted rooms, good public rooms, lobby and detailing	*Excellent lighting/plumbing, radio and TV circuits	Warm and cool air (zoned)
	Average	186.50	Stucco or siding, brick trim, some front ornamentation	Plaster or drywall, carpeting, adequate ancillary facilities, dining and bar	*All rooms with bath, adequate electric service	Heat pump system
	Low cost	145.00	Stucco or siding	Few public rooms, small coffee shop	*Minimum lighting/plumbing	Individual heat pumps
C-D†	Finished basement	102.00	Plaster or drywall interior	Plaster or drywall, vinyl composition, finished ceiling, service functions	Adequate lighting/plumbing, utility outlets and fixtures	Forced air
	Parking basement	52.50	Unfinished	Plaster ceiling, concrete floor	Minimum lighting/plumbing	Ventilation
	Utility basement	47.00	Unfinished	Unfinished, no ceiling	Minimum lighting/plumbing	None
	Mezzanine	82.00	Not included	Typical hotel finish and detail	Adequate lighting/plumbing	In bldg. cost

For fire-resistant Type I basements with concrete slab separation under Class C, D or S units, add $8.79 per square foot.

MEZZANINES: Do not use story height or area/perimeter multipliers with mezzanine costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs	Classes C/D	Sq. Ft. Costs
Excellent	$ 13.65	Excellent	$ 8.20
Good	9.97	Good	6.26
Average	7.42	Average	4.86
Low Cost	5.38	Low Cost	3.70

ELEVATOR STOPS: For basement stops, add $9,550 to $14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
3,000	$ 5.14	$ 6.63	$ 8.55	$11.05
5,000	4.75	6.09	7.80	10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE (ALTERNATE METHOD)
CLASSES A and B



GOOD/EXCELLENT CLASS A

OCCUPANCY DESCRIPTION:

Shell, Hotel - Full Service
This occupancy, together with occupancy Interior Space, Hotel - Full Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy 594 (Hotel - Full Service), which includes both the shell and tenant improvement costs.

These shell structures are three or more stories high, having multiple sleeping units without individual kitchen facilities. Where the ground floor is entirely divided into stores and shops, use occupancy (Retail Store) for that floor. The size of the support facilities, e.g., restaurants, bars, meeting space, etc., is largely dependent on the size and capacity of the facility rather than the quality of the improvements. Lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, laundry, storage facilities and office areas are commensurate with the building class and quality chosen. These shell structures include common area finishes only, which are about 10%.

Interior Build-out, Hotel - Full Service
This occupancy, together with occupancy Shell, Hotel - Full Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel, Full Service, which includes both the shell and tenant improvement costs.

The lower qualities typically have a small lobby, few public rooms and coffee shop. The better qualities have fine detail, good plaster, wall coverings and highly decorated public rooms. Some of the special refinements found in the better qualities include radio and television circuits.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASSES A AND B: SHELL HOTELS FULL SERVICE BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR CORE FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Excellent	$ 206.50	Best metal or stone, heat-absorbent or double glazing	Good plaster, carpet, wall coverings, fine detailed lobby	*Best lighting, and top quality core plumbing	None
	Good	165.00	Face brick, metal or concrete panels, individual design	Good detail, carpeted, highly decorated lobby	*Good lighting, and core plumbing fixtures	None
	Average	131.50	Face brick, metal, concrete or stucco panels, plain exterior	Typical good transient or average business hotel, adequate lobby	*Average lighting & plumbing, standard core fixtures	None
	Low cost	106.00	Brick, concrete block, metal stud panels, little ornamentation	Small lobby, coffee shop, minimum transient facilities	*Minimum lighting & plumbing, few core extras	None
B	Excellent	182.50	Best metal or stone, heat-absorbent or double glazing	Good plaster, carpet, wall coverings, fine detailed lobby	*Best lighting, and top quality core plumbing	None
	Good	145.50	Face brick, metal or concrete panels, individual design	Good detail, carpeted, highly decorated lobby	*Good lighting, and core plumbing fixtures	None
	Average	115.50	Face brick, metal, concrete or stucco panels, plain exterior	Typical good transient or average business hotel, adequate lobby	*Average lighting & plumbing, standard core fixtures	None
	Low cost	92.50	Brick, concrete block, synthetic plaster, little ornamentation	Small lobby, coffee shop, minimum transient facilities	*Minimum lighting & plumbing, few core extras	None

CLASSES A AND B: INTERIOR BUILD-OUT

(SQUARE FEET OF BUILD-OUT-FINISH)

TYPE	COST/ SQ. FT.	INTERIOR FINISH	LIGHTING AND PLUMBING	HEAT
Excellent	$ 177.50	Good plaster and wall coverings, carpet, fine detailed rooms	Best lighting, radio and TV circuits, top quality plumbing fixtures	Hot and chilled water (zoned)
Good	151.50	Plaster or drywall, carpeted, good decorating and detail rooms	Good lighting, radio and TV circuits, good plumbing fixtures	Hot and chilled water (zoned)
Average	115.50	Carpeted, plaster or drywall and painted masonry, adequate rooms	Lighting & plumbing above code, standard fixtures, one full bath per room	Warm and cool air (zoned)
Low cost	89.50	Low-cost carpet and tile, minimally finished rooms	Minimum lighting & plumbing, few extras	Hot water

MEZZANINES: Do not use story height or area/perimeter multipliers with mezzanine costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE CLASSES A and B (ALTERNATE METHOD)

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs
Excellent	$ 13.65
Good	9.97
Average	7.42
Low Cost	5.38

ELEVATOR STOPS: For basement stops, add $9,550 to$14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings..	15.35	20.40	27.00	36.00

For pool enclosures, see Page CAL 204

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area Sq. Ft./Story	AVERAGE PERIMETER 200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Average Floor Area Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE (ALTERNATE METHOD)
CLASSES C and D



GOOD/EXCELLENT CLASS C

OCCUPANCY DESCRIPTION:

Shell, Hotel - Full Service
This occupancy, together with occupancy Interior Space, Hotel- Full Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy 594 (Hotel - Full Service), which includes both the shell and tenant improvement costs.

These shell structures are three or more stories high, having multiple sleeping units without individual kitchen facilities. Where the ground floor is entirely divided into stores and shops, use occupancy (Retail Store) for that floor. The size of the support facilities, e.g., restaurants, bars, meeting space, etc., is largely dependent on the size and capacity of the facility rather than the quality of the improvements. Lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, laundry, storage facilities and office areas are commensurate with the building class and quality chosen. These shell structures include common area finishes only, which are about 10%.

Interior Build-out, Hotel - Full Service
This occupancy, together with occupancy Shell, Hotel - Full Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel, Full Service, which includes both the shell and tenant improvement costs.

The lower qualities typically have a small lobby, few public rooms and coffee shop. The better qualities have fine detail, good plaster, wall coverings and highly decorated public rooms. Some of the special refinements found in the better qualities include radio and television circuits.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASSES C AND D: SHELL HOTELS: FULL SERVICE BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR CORE FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$ 147.50	Best metal or concrete panels, stone, face brick	Good plaster, carpet, wall coverings, fine detailed lobby	*Best lighting, and top quality core plumbing	None
	Good	124.00	Brick, metal or concrete and glass, good trim and entrance	Good detail, carpeted, highly decorated lobby	*Good lighting, and core plumbing fixtures	None
	Average	103.50	Brick, stucco on block, some front ornamentation	Typical good transient or average business hotel, adequate lobby	*Average lighting & plumbing, standard core fixtures	None
	Low cost	83.50	Brick or concrete block	Small lobby, coffee shop, minimum transient facilities	Minimum lighting & plumbing, few core extras	None
D	Excellent	136.50	Best masonry veneer, metal and glass panels, highly decorative	Good plaster, carpet, wall coverings, fine detailed lobby	*Best lighting, and top quality core plumbing	None
	Good	112.50	Brick veneer, metal and glass, good entrance and trim	Good detail, carpeted, highly decorated lobby	*Good lighting, and core plumbing fixtures	None
	Average	93.50	Stucco or siding, brick trim, some front ornamentation	Typical good transient or average business hotel, adequate lobby	*Average lighting & plumbing, standard core fixtures	None
	Low cost	74.50	Stucco or siding	Small lobby, coffee shop, minimum transient facilities	Minimum lighting & plumbing, few core extras	None

CLASSES C AND D: INTERIOR BUILD-OUT

(SQUARE FEET OF BUILD-OUT-FINISH)

TYPE	COST/ SQ. FT.	INTERIOR FINISH	LIGHTING AND PLUMBING	HEAT
Excellent	$ 144.00	Good plaster and wall coverings, carpet, fine detailed rooms	Best lighting, radio and TV circuits, top quality plumbing fixtures	Hot and chilled water (zoned)
Good	113.00	Plaster or drywall, carpeted, good decorating and detail rooms	Good lighting, radio and TV circuits, good plumbing fixtures	Warm and cool air (zoned)
Average	94.50	Carpeted, plaster or drywall and painted masonry, adequate rooms	Lighting & plumbing above code, standard fixtures, one full bath per room	Heat pump system
Low cost	69.00	Low-cost carpet and tile, minimally finished rooms	Minimum lighting & plumbing, few extras	Indiv. thru-wall heat pumps

MEZZANINES: Do not use story height or area/perimeter multipliers with mezzanine costs.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – FULL SERVICE CLASSES C and D (ALTERNATE METHOD)

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes C/D	Sq. Ft. Costs
Excellent	$ 8.20
Good	6.26
Average	4.86
Low Cost	3.70

ELEVATOR STOPS: For basement stops, add $ 9,550 to$14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings..	15.35	20.40	27.00	36.00

For pool enclosures, see Page CAL 204

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE



GOOD CLASS C



GOOD CLASS D

OCCUPANCY DESCRIPTION: These structures are three or more stories high, having multiple sleeping units and limited common area amenities. Studio and bedroom suites can have limited kitchen facilities for extended stays. The quality of the hotel is determined primarily from the interior refinements. The best quality hotels have some high-cost wall cover and floor finish in the open and public areas, with larger sleeping room suites containing high cost wall cover. Limited service hotels include some lounge or recreation support facilities, lobby, laundry, storage and office space consistent with the size and quality of the facility.

INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Excellent	$ 281.00	Metal or stone, heat-absorbent or double glazing	Fine detail and carpet, good plaster and wall coverings, some custom suites	*Best lighting, wet bar, top-quality plumbing	Hot and chilled water (zoned)
	Good	235.00	Face brick, metal or good concrete or stucco panels,	Typical good commercial or motor hotel, few public rooms	*Lighting/plumbing above code, standard fixtures, some extras	Warm and cool air (zoned)
	Average	203.50	Face brick, metal, concrete or EIFS panels, plain exterior	Plaster/drywall and paint, good carpet, some built-in extras, support services	*Some good suites, lighting and plumbing fixtures, TV circuits	Heat pump system
	Low cost	166.00	Brick, concrete block, metal stud panels, little ornamentation	Small lobby, some carpet and tile, typical economy facility	*Minimum lighting/plumbing, few extras	Indiv. thru-wall heat pumps
B	Excellent	255.50	Metal or stone, heat-absorbent or double glazing	Fine detail and carpet, good plaster and wall coverings, some custom suites	*Best lighting, TV circuits, wet bar, top-quality plumbing	Hot and chilled water (zoned)
	Good	213.50	Face brick, metal or good concrete or stucco panels	Typical good commercial or motor hotel, few public rooms	*Lighting/plumbing above code, standard fixtures, some extras	Warm and cool air (zoned)
	Average	183.50	Face brick, metal, concrete or EIFS panels, plain exterior	Plaster/drywall and paint, good carpet, some built-in extras, support services	*Some good suites, lighting and plumbing fixtures, TV circuits	Heat pump system
	Low cost	149.00	Brick, concrete block, synthetic plaster, little ornamentation	Small lobby, some carpet and tile, typical economy facility	*Minimum lighting/plumbing, few extras	Indiv. thru-wall heat pumps
C	Excellent	229.50	Metal or concrete panels, stone, brick, individual design	Fine detail and carpet, good plaster and wall coverings	*Excellent lighting, radio and TV circuits, quality plumbing	Warm and cool air (zoned)
	Good	189.50	Brick, metal or concrete and glass, good trim and entrance	Typical good motor hotel or all suites, few public rooms	*Lighting/plumbing above code, standard fixtures, some extras	Heat pump system
	Average	145.50	Block or brick, standard front, small lobby, vending area	Drywall, carpet, vinyl composition, minimum suites, no food services	*Standard fixtures, guest laundry, small lobby restrooms	Indiv. thru-wall heat pumps
	Low cost	122.00	Brick or concrete block	Painted block, some carpet and tile	*Minimum lighting/plumbing	Indiv. ht. pumps
D	Good	180.50	Brick veneer, EIFS, metal and glass, good entrance and trim	Typical good motor hotel or all suites, few public rooms	*Lighting/plumbing above code, standard fixtures, some extras	Heat pump system
	Average	139.00	Siding or stucco, standard front, small lobby, vending area	Drywall, carpet, vinyl composition, minimum suites, no food services	*Standard fixtures, guest laundry, small lobby restrooms	Indiv. thru-wall heat pumps
	Low cost	116.00	Stucco or siding, very plain	Drywall, wood or asphalt tile	*Minimum lighting/plumbing	Indiv. ht. pumps
S	Average	136.50	Insulated panels, some ornamentation	Drywall, carpet and vinyl composition, breakfast hospitality area only	*Adequate lighting and plumbing, TV circuits, some good fixtures	Indiv. thru-wall heat pumps

For basements, see CAL 126 Hotels – Full Service.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs	Classes C/D/S	Sq. Ft. Costs
Excellent	$ 8.29	Excellent	$ 5.10
Good	7.06	Good	3.81
Average	5.91	Average	2.82
Low Cost	5.02	Low Cost	2.04

ELEVATOR STOPS: For basement stops, add $ 9,550 to $14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

For pool enclosures, see Page CAL 204

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area	AVERAGE PERIMETER													Average Floor Area
Sq. Ft./Story	200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE (ALTERNATE METHOD) CLASSES A and B



GOOD CLASS A

OCCUPANCY DESCRIPTION:

Shell, Hotel - Limited Service
This occupancy, together with occupancy Interior Space, Hotel-Limited Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel - Limited Service, which includes both the shell and tenant improvement costs.

These shell structures are three or more stories high, having multiple sleeping units and limited common area amenities. Limited service hotels include some lounge or recreation support facilities, lobby, laundry, storage and office space commensurate with the size and quality of the facility. These shell structures include common area finishes only, which are about 5%.

Interior Build-out, Hotel - Limited Service
This occupancy, together with occupancy Shell, Hotel - Limited Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel, Limited Service, which includes both the shell and tenant improvement costs.

The lower qualities typically have a small lobby; the typical economy facility The better qualities have fine detail, carpet, good plaster, wall coverings and some custom suites. Some of the special refinements found in the better qualities include television circuits and wet bar.

TABLE INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASSES A AND B: SHELL HOTELS: LIMITED SERVICE BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
A	Excellent	$ 159.50	Metal or stone, heat-absorbent or double glazing	Fine detail and carpet, good plaster and wall coverings, excellent lobby	*Best lighting, and top quality core plumbing	None
	Good	138.00	Face brick, metal or good concrete or stucco panels	Typical good commercial or motor hotel, core services	*Good lighting, and core plumbing fixtures	None
	Average	120.50	Face brick, metal, concrete or EIFS panels, plain exterior	Plaster/drywall and paint, good carpet, support services	*Average lighting & plumbing, standard core fixtures	None
	Low cost	105.50	Brick, concrete block, metal stud panels, little ornamentation	Small lobby, some carpet and tile, typical economy facility	*Minimum lighting & plumbing, few core extras	None
B	Excellent	141.00	Metal or stone, heat-absorbent or double glazing	Fine detail and carpet, good plaster and wall coverings, excellent lobby	*Best lighting, and top quality core plumbing	None
	Good	121.50	Face brick, metal or good concrete or stucco panels	Typical good commercial or motor hotel, core services	*Good lighting, and core plumbing fixtures	None
	Average	105.50	Face brick, metal, concrete or EIFS panels, plain exterior	Plaster/drywall and paint, good carpet, support services	*Average lighting & plumbing, standard core fixtures	None
	Low cost	92.00	Brick, concrete block, synthetic plaster, little ornamentation	Small lobby, some carpet and tile, typical economy facility	*Minimum lighting & plumbing, few core extras	None

CLASSES A AND B: INTERIOR BUILD-OUT

(SQUARE FEET OF BUILD-OUT-FINISH)

TYPE	COST/ SQ. FT.	INTERIOR FINISH	LIGHTING AND PLUMBING	HEAT
Excellent	$ 121.50	Good plaster and wall coverings, carpet, fine detailed rooms, some custom suites	Best lighting, TV circuits, wet bar, top quality plumbing	Hot and chilled water (zoned)
Good	97.00	Plaster or drywall, carpeted, good decorating and detailed rooms, all suites	Lighting & plumbing above code, standard fixtures, some extras	Warm and cool air (zoned)
Average	83.00	Average drywall, vinyl composition, carpet, adequate bedrooms and bath, minimum suites	Some good suites, lighting & plumbing fixtures, TV circuits	Heat pump system
Low cost	61.00	Low-cost partitions, paint, vinyl composition, low-cost carpet, one bath per unit	Minimum lighting & plumbing, few extras	Indiv. thru-wall heat pumps

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE CLASSES A and B (ALTERNATE METHOD)

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes A/B	Sq. Ft. Costs
Excellent	$ 8.29
Good	7.06
Average	5.91
Low Cost	5.02

ELEVATOR STOPS: For basement stops, add $ 9,550 to$14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings..	15.35	20.40	27.00	36.00

For pool enclosures, see Page CAL 204

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area Sq. Ft./Story	AVERAGE PERIMETER 200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Average Floor Area Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE (ALTERNATE METHOD) CLASSES C, D and S



AVERAGE CLASS D

OCCUPANCY DESCRIPTION:

Shell, Hotel - Limited Service
This occupancy, together with occupancy Interior Space, Hotel - Limited Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel - Limited Service, which includes both the shell and tenant improvement costs.

These shell structures are three or more stories high, having multiple sleeping units and limited common area amenities. Limited service hotels include some lounge or recreation support facilities, lobby, laundry, storage and office space commensurate with the size and quality of the facility. These shell structures include common area finishes only, which are about 5%.

Interior Build-out, Hotel - Limited Service
This occupancy, together with occupancy Shell, Hotel - Limited Service, allows you to individually price the shell and the tenant improvement costs for a hotel. This provides an alternative to occupancy Hotel, Limited Service, which includes both the shell and tenant improvement costs.

The better qualities have fine detail, carpet, good plaster, wall coverings and some custom suites. Some of the special refinements found in the better qualities include television circuits and wet bar.

TABLE INCLUDED IN COSTS: Architects' fees and contractors' overhead and profit. Allowances for lobby, lounges, restaurants, ballrooms, meeting rooms, kitchens, storage facilities and office areas commensurate with the building class and quality chosen. Elevators are included in costs designated with an asterisk (*).

NOT INCLUDED IN COSTS: Sprinklers, balconies, swimming pools. All furniture, fixtures and equipment, such as bars, counters or seating, kitchen equipment, etc. which are not permanently attached and included in the general building contract.

SQUARE FOOT COST TABLE

CLASSES C, D AND S: SHELL HOTELS: LIMITED SERVICE BUILDINGS

CLASS	TYPE	COST/ SQ. FT.	EXTERIOR WALLS	INTERIOR CORE FINISH	LIGHTING, PLUMBING AND MECHANICAL	HEAT
C	Excellent	$135.50	Metal or concrete panels, stone, brick, individual design	Fine detail and carpet, good plaster and wall coverings, excellent lobby	*Best lighting, and top quality core plumbing	None
	Good	112.00	Brick, metal or concrete and glass, good trim and entrance	Typical good commercial or motor hotel, core services	*Good lighting, and core plumbing fixtures	None
	Average	91.50	Steel or concrete frame, or bearing walls, some trim	Drywall or plaster, vinyl, terrazzo, carpet, adequate entry lobby	*Average lighting & plumbing, guest laundry and small lobby restrooms	None
	Low cost	74.00	Brick or concrete block	Small lobby, some carpet and tile, typical economy facility	Minimum lighting & plumbing, few core extras	None
D	Good	103.00	Brick veneer, EIFS, metal and glass, good entrance and trim	Typical good commercial or motor hotel, core services	*Good lighting, and core plumbing fixtures	None
	Average	84.50	Siding or stucco, standard front, small lobby, vending area	Plaster/drywall and paint, good carpet, support services	*Average lighting & plumbing, guest laundry and small lobby restrooms	None
	Low cost	68.00	Stucco or siding, very plain	Small lobby, some carpet and tile, typical economy facility	Minimum lighting & plumbing, few core extras	None
S	Average	83.00	Insulated panels, some ornamentation	Plaster/drywall and paint, good carpet, support services	*Average lighting & plumbing, guest laundry and small lobby restrooms	None

CLASSES C, D AND S: INTERIOR BUILD-OUT

(SQUARE FEET OF BUILD-OUT-FINISH)

TYPE	COST/ SQ. FT.	INTERIOR FINISH	LIGHTING AND PLUMBING	HEAT
Excellent	$ 94.00	Good plaster and wall coverings, carpet, fine detailed rooms, some custom suites	Best lighting, TV circuits, wet bar, top quality plumbing	Warm and cool air (zoned)
Good	77.50	Plaster or drywall, carpeted, good decorating and detailed rooms, all suites	Lighting & plumbing above code, standard fixtures, some extras	Heat pump system
Average	54.00	Average drywall, vinyl composition, carpet, adequate bedrooms and bath, minimum suites	Adequate lighting and plumbing	Indiv. thru-wall heat pumps
Low cost	46.50	Low-cost partitions, paint, vinyl composition, low-cost carpet, one bath per unit	Minimum lighting & plumbing	Indiv. thru-wall heat pumps

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

HOTELS – LIMITED SERVICE CLASSES C, D and S (ALTERNATE METHOD)

REFINEMENTS: On this page are adjustments to the base costs from the previous page. Follow steps 1 through 5 to obtain final costs.

1

ELEVATORS: Buildings whose base costs include elevators are marked with an asterisk (*). If the building under consideration has no elevators, deduct the following from the base costs so marked. For detailed costs see Section UIP 8.

Classes C/D/S	Sq. Ft. Costs
Excellent	$5.10
Good	3.81
Average	2.82
Low Cost	2.04

ELEVATOR STOPS: For basement stops, add $9,550 to $14,400 per stop.

CANOPIES: This is the cantilevered portion of a building that extends over an entrance.

	LOW	AVG	GOOD	EXCL.
Wood frame	$38.00	$47.00	$58.00	$71.50
Light false mansard	19.05	23.55	29.00	35.75
Steel frame	44.50	56.00	70.00	87.50
Light false mansard	22.35	28.00	35.00	43.75

SPRINKLERS: Apply to area covered by sprinklers.

Sq. Ft.	LOW	AVG.	GOOD	EXCL.
5,000	$ 4.75	$ 6.09	$ 7.80	$10.00
10,000	4.28	5.44	6.91	8.77
20,000	3.87	4.87	6.10	7.69
50,000	3.36	4.20	5.24	6.50
100,000	3.00	3.73	4.59	5.71
200,000	2.69	3.30	4.06	5.01
500,000	2.35	2.86	3.47	4.23

BALCONIES: Balcony costs include the supporting structure, decking and rails. Apply costs to the sq.ft. of the balcony area.

	LOW	AVG.	GOOD	EXCL.
Concrete	$ 34.00	$ 43.50	$ 55.00	$ 71.00
Steel	31.75	42.50	56.50	75.50
Wood	29.75	39.50	52.50	68.50
Add for ornate finishes, balustrades	29.50	36.00	44.25	54.00
Add for roofs or awnings	15.35	20.40	27.00	36.00

For pool enclosures, see Page CAL 204

2

HEATING AND COOLING

These costs are averages of the total installed cost of the entire heating or cooling system including a prorated share of contractors' overhead and profit and architects' fees. If the heating found in the building being assessed is different from that indicated, take the difference between the costs of the two and add to or subtract from the base square foot cost. For other types or system adjustments, see Segregated Costs.

HEATING ONLY	Sq. Ft. Costs	HEATING & COOLING	Sq. Ft. Costs	COOLING ONLY	Sq. Ft. Costs
Electric cable or baseboard	$ 10.50	Package A.C. (short ductwork)	$ 21.90	Central refrigeration (zoned)	$ 16.00
Electric wall heaters	3.84	Warm and cool air (zoned)	30.50	package (short ductwork)	10.65
Forced air furnace	15.15	Hot/chilled water (zoned)	45.50	Central evaporative	7.04
Hot water, baseboard/convector	20.75	Heat pump system	25.50	Pkg. refrig.	$2,750 to $3,425 per ton capacity
radiant floor/ceiling	22.55	Ind. thru-wall heat pumps	10.75	Evap. coolers.	$331 to $535 per MCFM capacity
Steam (including boiler)	19.20				
without boiler	16.85	Small indiv. heat pumps cost $2,280 to $3,125		**VENTILATION ONLY**	
Wall or floor furnace	4.43	per ton of rated capacity.		Vent. (blowers/ducts)	$ 3.18

3

HEIGHT REFINEMENTS

MULTISTORY BUILDINGS: Up to 30 stories, add .5% (1/2%) for each story over three, above ground, to all base costs; over 30, add .4% (4/10%)

STORY HEIGHT MULTIPLIERS: Multiply base cost by the following multipliers for any variation from the average story height.

Average Wall Height	Square Foot Multiplier	Average Wall Height	Square Foot Multiplier
8	.947	12	1.055
9	.973	13	1.084
10	1.000 (base)	14	1.114
11	1.027		

4

Average Floor Area Sq. Ft./Story	AVERAGE PERIMETER 200	250	300	350	400	450	500	600	700	800	1000	1200	1400	Average Floor Area Sq. Ft./Story
2,000	1.083	1.143	1.206	1.267	1.329	-----	-----	-----	-----	-----	-----	-----	-----	**2,000**
4,000	.959	.989	1.021	1.052	1.083	1.113	1.143	1.206	1.268	1.329	-----	-----	-----	**4,000**
6,000	.917	.938	.959	.980	1.000	1.021	1.042	1.083	1.123	1.165	-----	-----	-----	**6,000**
8,000	-----	.913	.929	.944	.959	.974	.989	1.021	1.052	1.083	1.143	1.206	1.268	**8,000**
10,000	-----	-----	.910	.922	.935	.947	.959	.984	1.009	1.034	1.083	1.133	1.181	**10,000**
12,000	-----	-----	-----	.907	.917	.928	.938	.959	.980	1.000	1.042	1.083	1.123	**12,000**
14,000	-----	-----	-----	-----	.906	.915	.924	.942	.959	.977	1.011	1.047	1.083	**14,000**
20,000	-----	-----	-----	-----	.885	.892	.898	.910	.922	.935	.959	.984	1.009	**20,000**
24,000	-----	-----	-----	-----	-----	-----	.886	.896	.907	.917	.938	.959	.980	**24,000**
28,000	-----	-----	-----	-----	-----	-----	.880	.888	.898	.906	.924	.942	.959	**28,000**
32,000	-----	-----	-----	-----	-----	-----	.874	.882	.889	.898	.913	.928	.944	**32,000**
36,000	-----	-----	-----	-----	-----	-----	.870	.877	.883	.890	.904	.917	.932	**36,000**
40,000	-----	-----	-----	-----	-----	-----	.866	.873	.879	.885	.898	.910	.922	**40,000**

5 USE COUNTY MULTIPLIERS IN MULTIPLIER SECTION.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.