SINGLE - FAMILY DETACHED SPECIFICATIONS

CLASS CD

The materials listed below are typical of a Class CD house. Variations from these specifications can be found. Substitute materials of equivalent price and quality may be used in place of the materials listed below. The pricing examples and the adjustments and additions section contain types of variations which normally require adjustments. **NOTE**: The single- family sections, include base interior wall height of 8 feet for each floor. For each foot of variation, add to or deduct from that portion of the residence base cost only: 4% for all residence exterior masonry walls, including brick and stone veneers; 3% for siding exterior walls. See Page 4 for further information and calculations.

EXTERIOR WALLS: either A or B

A) WOOD FRAME with siding of:
- Aluminum
- Wood
- Vinyl
- Cement fiber
- Brick veneer
- BASIC WALL STRUCTURE includes:
  - Building paper
  - 1/2” insulation board
  - 2” x 4” studs, 16” o.c.
  - 3 1/2” batt insulation
  - 3/8” drywall
  - Interior surface painted, one coat
  - Two exterior doors
  - One aluminum storm and screen door

B) MASONRY CONSTRUCTION
- 8” concrete block
- Rigid insulation board
- 3/8” drywall on furring
- Interior surface painted, one coat
- Two exterior doors
- One aluminum storm and screen door

WINDOWS: (10% of wall area)
- Wood sliding
- Wood storms and screens

ROOF:
- 4/12 pitch
- 235# asphalt shingle
- Felt
- 1/2” oriented strand board
- 2” x 4” truss, 24” o.c.
- Gutters and downspouts

INTERIOR PARTITIONS AND FINISH:
- 8’ high walls
- 3/8” drywall, two sides
- Painted, two coats, two sides
- 2” x 4” studs, 16” o.c.
- Softwood trim
- Flush, hollow-core doors
- Closet shelving

FLOOR FINISH:
- 80% softwood or carpet w/ pad and underlayment
- 20% vinyl sheet with underlayment

CEILING:
- 3/8” drywall
- Painted, one coat
- 12” insulation

EXCAVATION:
- 10-course basement

BASEMENT WALLS:
- 10-course, 8” concrete block
- 8” x 18” footings
- Waterproofing
- Perimeter insulation
- Drain tile, one side

BASEMENT FLOOR:
- 4” gravel base
- 3-1/2” concrete floor

FLOOR CONSTRUCTION:
- Felt lining
- 1/2” plywood
- 2” x 8” joists, 16” o.c.
- Bridging
- 6” steel I-beam
- 3” diameter steel posts

HEATING AND AIR CONDITIONING:
- Gas fired forced air furnace with cold air returns

ELECTRIC:
- 100-Ampere, 110/220-Volt system
- Romex wiring
- Unfinished area, Non-metallic

PLUMBING:
- White fixtures:
- One lavatory
- One water closet
- One bathtub with shower
- One single-compartment kitchen sink
- One single-compartment laundry tub
- One 30-gallon water heater
- One floor drain

BUILT-IN UNITS:
- Laminated plastic kitchen cabinets:
- 16’ base with laminated plastic top
- 8’ wall mounted, 30” high
- 6’ wall mounted, 18” high
- Open-riser basement stairs

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD














© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.







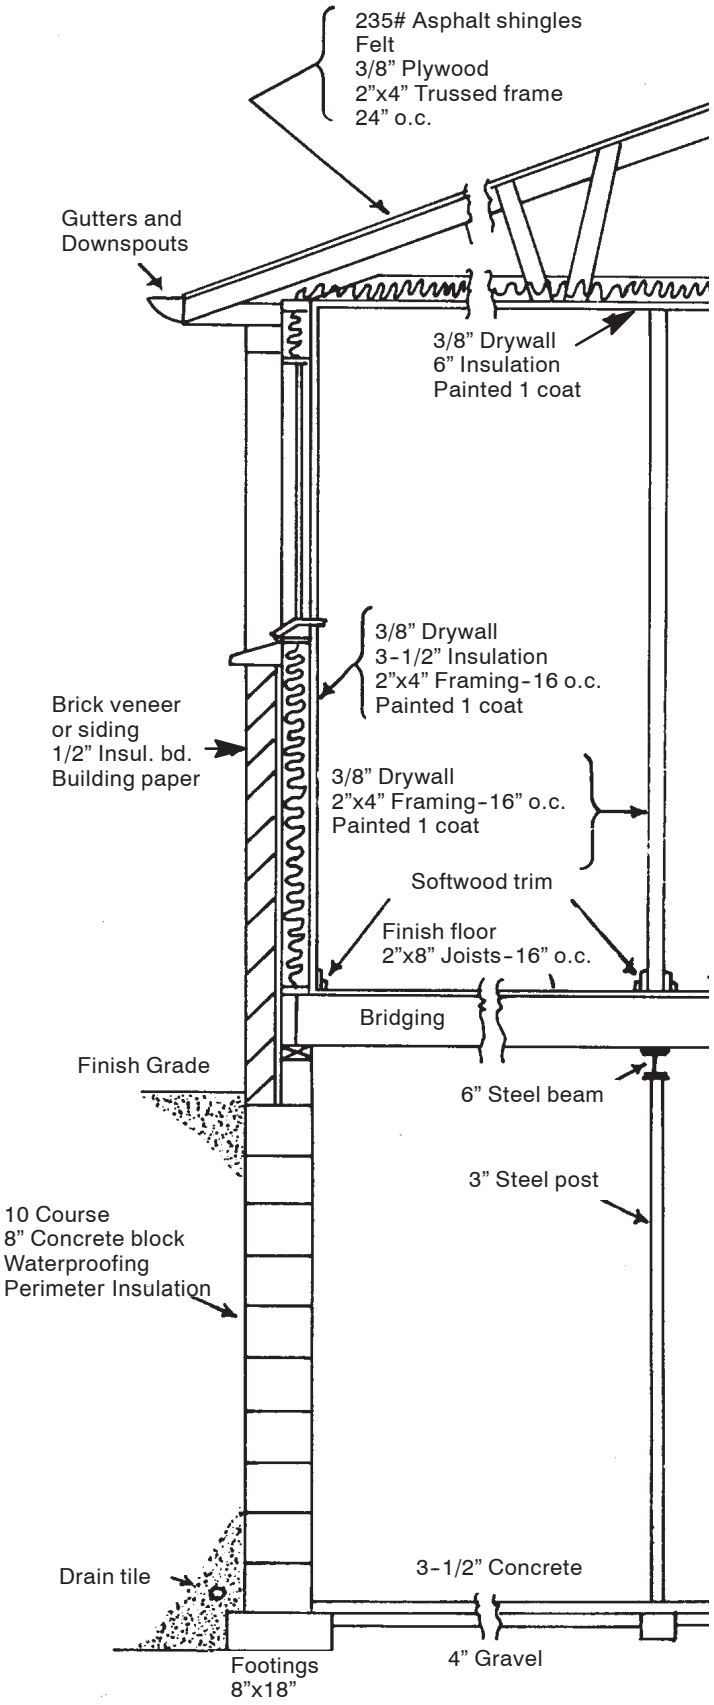

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD
1 STORY

SQUARE FOOT COSTS

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	158.88	167.88	166.38	-7.25	-35.25	-39.18	**400**
450	156.42	165.17	163.67	-6.94	-34.19	-38.12	**450**
500	154.19	162.69	161.19	-6.63	-33.13	-37.06	**500**
550	151.87	159.87	158.62	-6.31	-32.06	-35.99	**550**
600	149.68	157.18	156.18	-6.00	-31.00	-34.93	**600**
650	147.84	155.34	154.34	-5.85	-30.44	-34.37	**650**
700	146.07	153.57	152.57	-5.70	-29.88	-33.81	**700**
750	144.61	151.86	150.86	-5.55	-29.31	-33.24	**750**
800	143.21	150.21	149.21	-5.40	-28.75	-32.68	**800**
850	141.65	148.65	147.65	-5.24	-28.25	-32.18	**850**
900	140.13	147.13	146.13	-5.08	-27.75	-31.68	**900**
950	138.89	145.64	144.64	-4.91	-27.25	-31.18	**950**
1000	137.67	144.17	143.17	-4.75	-26.75	-30.68	**1000**
1050	136.66	142.91	142.16	-4.64	-26.44	-30.37	**1050**
1100	135.67	141.67	141.17	-4.53	-26.13	-30.06	**1100**
1150	134.69	140.44	139.94	-4.41	-25.81	-29.74	**1150**
1200	133.73	139.23	138.73	-4.30	-25.50	-29.43	**1200**
1250	132.88	138.38	137.88	-4.22	-25.29	-29.22	**1250**
1300	132.04	137.54	137.04	-4.15	-25.08	-29.01	**1300**
1350	131.21	136.71	136.21	-4.07	-24.86	-28.79	**1350**
1400	130.39	135.89	135.39	-4.00	-24.65	-28.58	**1400**
1450	129.57	135.07	134.57	-3.93	-24.44	-28.37	**1450**
1500	128.77	134.27	133.77	-3.85	-24.23	-28.16	**1500**
1550	128.21	133.46	132.96	-3.77	-24.01	-27.94	**1550**
1600	127.67	132.67	132.17	-3.70	-23.80	-27.73	**1600**
1650	127.01	132.01	131.51	-3.68	-23.73	-27.66	**1650**
1700	126.37	131.37	130.87	-3.66	-23.65	-27.58	**1700**
1750	125.72	130.72	130.47	-3.64	-23.58	-27.51	**1750**
1800	125.08	130.08	130.08	-3.63	-23.50	-27.43	**1800**
1850	124.69	129.44	129.44	-3.61	-23.43	-27.36	**1850**
1900	124.31	128.81	128.81	-3.59	-23.35	-27.28	**1900**
1950	123.93	128.43	128.43	-3.57	-23.28	-27.21	**1950**
2000	123.55	128.05	128.05	-3.55	-23.20	-27.13	**2000**
2050	122.89	127.39	127.39	-3.49	-23.09	-27.02	**2050**
2100	122.24	126.74	126.74	-3.44	-22.99	-26.92	**2100**
2150	121.84	126.34	126.34	-3.38	-22.88	-26.81	**2150**
2200	121.44	125.94	125.94	-3.33	-22.78	-26.71	**2200**
2250	121.04	125.29	125.29	-3.27	-22.67	-26.60	**2250**
2300	120.64	124.64	124.64	-3.21	-22.56	-26.49	**2300**
2350	120.25	124.25	124.25	-3.16	-22.46	-26.39	**2350**
2400	119.86	123.86	123.86	-3.10	-22.35	-26.28	**2400**
2450	119.23	123.23	123.48	-3.07	-22.26	-26.19	**2450**
2500	118.61	122.61	123.11	-3.04	-22.18	-26.11	**2500**
2550	118.24	122.24	122.74	-3.01	-22.09	-26.02	**2550**
2600	117.87	121.87	122.37	-2.98	-22.00	-25.93	**2600**
2650	117.50	121.50	121.75	-2.94	-21.91	-25.84	**2650**
2700	117.14	121.14	121.14	-2.91	-21.83	-25.76	**2700**
2750	116.77	120.77	120.77	-2.88	-21.74	-25.67	**2750**
2800	116.41	120.41	120.41	-2.85	-21.65	-25.58	**2800**
2850	116.00	120.00	120.00	-2.81	-21.51	-25.44	**2850**
2900	115.58	119.58	119.58	-2.77	-21.38	-25.31	**2900**
2950	115.17	119.17	119.17	-2.74	-21.24	-25.17	**2950**
3000	114.76	118.76	118.76	-2.70	-21.10	-25.03	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

CLASS CD
1+ STORY

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	165.74	172.99	171.61	-7.25	-35.25	-39.18	**400**
450	163.06	169.98	168.73	-6.94	-34.19	-38.12	**450**
500	160.60	167.20	166.09	-6.63	-33.13	-37.06	**500**
550	158.13	164.46	163.47	-6.31	-32.06	-35.99	**550**
600	155.77	161.84	160.97	-6.00	-31.00	-34.93	**600**
650	153.97	159.83	159.04	-5.85	-30.44	-34.37	**650**
700	152.24	157.89	157.19	-5.70	-29.88	-33.81	**700**
750	150.56	156.05	155.43	-5.55	-29.31	-33.24	**750**
800	148.94	154.26	153.72	-5.40	-28.75	-32.68	**800**
850	147.45	152.62	152.14	-5.24	-28.25	-32.18	**850**
900	145.98	151.02	150.60	-5.08	-27.75	-31.68	**900**
950	144.59	149.50	149.14	-4.91	-27.25	-31.18	**950**
1000	143.22	148.00	147.70	-4.75	-26.75	-30.68	**1000**
1050	142.09	146.77	146.51	-4.64	-26.44	-30.37	**1050**
1100	140.98	145.56	145.33	-4.53	-26.13	-30.06	**1100**
1150	139.92	144.40	144.21	-4.41	-25.81	-29.74	**1150**
1200	138.88	143.25	143.10	-4.30	-25.50	-29.43	**1200**
1250	137.98	142.26	142.16	-4.22	-25.29	-29.22	**1250**
1300	137.09	141.29	141.22	-4.15	-25.08	-29.01	**1300**
1350	136.25	140.37	140.33	-4.08	-24.86	-28.79	**1350**
1400	135.42	139.46	139.45	-4.00	-24.65	-28.58	**1400**
1450	134.61	138.59	138.61	-3.93	-24.44	-28.37	**1450**
1500	133.81	137.72	137.78	-3.85	-24.23	-28.16	**1500**
1550	133.04	136.88	136.97	-3.77	-24.01	-27.94	**1550**
1600	132.28	136.05	136.16	-3.70	-23.80	-27.73	**1600**
1650	131.69	135.40	135.53	-3.68	-23.73	-27.66	**1650**
1700	131.10	134.75	134.90	-3.66	-23.65	-27.58	**1700**
1750	130.54	134.13	134.30	-3.64	-23.58	-27.51	**1750**
1800	129.98	133.52	133.70	-3.63	-23.50	-27.43	**1800**
1850	129.44	132.93	133.15	-3.61	-23.43	-27.36	**1850**
1900	128.90	132.34	132.60	-3.59	-23.35	-27.28	**1900**
1950	128.40	131.79	132.05	-3.57	-23.28	-27.21	**1950**
2000	127.90	131.24	131.50	-3.55	-23.20	-27.13	**2000**
2050	127.39	130.68	130.96	-3.49	-23.09	-27.02	**2050**
2100	126.87	130.11	130.43	-3.44	-22.99	-26.92	**2100**
2150	126.37	129.57	129.91	-3.38	-22.88	-26.81	**2150**
2200	125.87	129.03	129.38	-3.33	-22.78	-26.71	**2200**
2250	125.39	128.51	128.87	-3.27	-22.67	-26.60	**2250**
2300	124.91	127.98	128.36	-3.21	-22.56	-26.49	**2300**
2350	124.45	127.49	127.89	-3.16	-22.46	-26.39	**2350**
2400	124.00	126.99	127.42	-3.10	-22.35	-26.28	**2400**
2450	123.57	126.54	126.96	-3.07	-22.26	-26.19	**2450**
2500	123.15	126.08	126.51	-3.04	-22.18	-26.11	**2500**
2550	122.73	125.63	126.08	-3.01	-22.09	-26.02	**2550**
2600	122.31	125.17	125.66	-2.97	-22.00	-25.93	**2600**
2650	121.92	124.74	125.23	-2.94	-21.91	-25.84	**2650**
2700	121.52	124.32	124.80	-2.91	-21.83	-25.76	**2700**
2750	121.12	123.90	124.39	-2.88	-21.74	-25.67	**2750**
2800	120.73	123.48	123.98	-2.85	-21.65	-25.58	**2800**
2850	120.30	123.02	123.54	-2.81	-21.51	-25.44	**2850**
2900	119.88	122.56	123.11	-2.78	-21.38	-25.31	**2900**
2950	119.47	122.12	122.68	-2.74	-21.24	-25.17	**2950**
3000	119.06	121.69	122.25	-2.70	-21.10	-25.03	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD
1 1/4 STORY

SQUARE FOOT COSTS

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	178.33	185.77	184.54	-7.25	-35.25	-36.23	**400**
450	175.25	182.45	181.32	-6.93	-34.16	-35.14	**450**
500	172.49	179.43	178.41	-6.63	-33.13	-34.11	**500**
550	169.83	176.51	175.60	-6.31	-32.04	-33.02	**550**
600	167.35	173.78	172.97	-6.00	-31.00	-31.98	**600**
650	165.41	171.59	170.89	-5.85	-30.42	-31.40	**650**
700	163.60	169.52	168.93	-5.70	-29.88	-30.86	**700**
750	161.80	167.47	166.99	-5.55	-29.30	-30.28	**750**
800	160.09	165.51	165.13	-5.40	-28.75	-29.73	**800**
850	158.55	163.83	163.51	-5.24	-28.24	-29.22	**850**
900	157.06	162.22	161.96	-5.07	-27.75	-28.73	**900**
950	155.58	160.61	160.41	-4.91	-27.24	-28.22	**950**
1000	154.14	159.05	158.90	-4.75	-26.75	-27.73	**1000**
1050	152.89	157.68	157.58	-4.64	-26.43	-27.41	**1050**
1100	151.68	156.34	156.31	-4.53	-26.13	-27.11	**1100**
1150	150.47	155.00	155.02	-4.41	-25.80	-26.79	**1150**
1200	149.29	153.69	153.77	-4.30	-25.50	-26.48	**1200**
1250	148.36	152.69	152.79	-4.22	-25.28	-26.26	**1250**
1300	147.46	151.71	151.85	-4.15	-25.08	-26.06	**1300**
1350	146.55	150.72	150.89	-4.07	-24.86	-25.84	**1350**
1400	145.67	149.76	149.96	-4.00	-24.65	-25.63	**1400**
1450	144.78	148.79	149.02	-3.92	-24.43	-25.41	**1450**
1500	143.92	147.84	148.10	-3.85	-24.23	-25.21	**1500**
1550	143.04	146.88	147.17	-3.77	-24.01	-24.99	**1550**
1600	142.18	145.94	146.27	-3.70	-23.80	-24.78	**1600**
1650	141.57	145.28	145.62	-3.68	-23.72	-24.70	**1650**
1700	140.97	144.63	144.99	-3.66	-23.65	-24.63	**1700**
1750	140.37	143.97	144.35	-3.64	-23.57	-24.55	**1750**
1800	139.78	143.32	143.72	-3.63	-23.50	-24.48	**1800**
1850	139.18	142.67	143.09	-3.61	-23.42	-24.40	**1850**
1900	138.60	142.04	142.47	-3.59	-23.35	-24.33	**1900**
1950	138.01	141.39	141.85	-3.57	-23.27	-24.25	**1950**
2000	137.44	140.76	141.24	-3.55	-23.20	-24.18	**2000**
2050	136.90	140.18	140.68	-3.49	-23.09	-24.07	**2050**
2100	136.37	139.61	140.13	-3.44	-22.99	-23.97	**2100**
2150	135.84	139.04	139.57	-3.38	-22.88	-23.86	**2150**
2200	135.32	138.48	139.03	-3.33	-22.78	-23.76	**2200**
2250	134.79	137.91	138.48	-3.27	-22.66	-23.65	**2250**
2300	134.28	137.35	137.93	-3.21	-22.56	-23.55	**2300**
2350	133.75	136.78	137.39	-3.16	-22.45	-23.44	**2350**
2400	133.24	136.22	136.85	-3.10	-22.35	-23.33	**2400**
2450	132.79	135.74	136.38	-3.07	-22.26	-23.24	**2450**
2500	132.36	135.27	135.93	-3.04	-22.18	-23.16	**2500**
2550	131.92	134.79	135.46	-3.01	-22.08	-23.07	**2550**
2600	131.48	134.32	135.01	-2.97	-22.00	-22.98	**2600**
2650	131.04	133.85	134.55	-2.94	-21.91	-22.89	**2650**
2700	130.61	133.38	134.09	-2.91	-21.83	-22.81	**2700**
2750	130.18	132.91	133.64	-2.88	-21.73	-22.72	**2750**
2800	129.75	132.44	133.19	-2.85	-21.65	-22.63	**2800**
2850	129.24	131.90	132.65	-2.81	-21.51	-22.49	**2850**
2900	128.75	131.36	132.13	-2.77	-21.38	-22.36	**2900**
2950	128.24	130.81	131.60	-2.74	-21.23	-22.22	**2950**
3000	127.75	130.28	131.07	-2.70	-21.10	-22.08	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

CLASS CD
1 1/2 STORY

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	193.28	200.78	200.78	-7.25	-35.25	-37.22	**400**
450	190.69	197.63	197.81	-6.94	-34.19	-36.15	**450**
500	188.33	194.71	195.08	-6.63	-33.13	-35.09	**500**
550	186.14	191.95	192.52	-6.31	-32.06	-34.03	**550**
600	184.08	189.33	190.08	-6.00	-31.00	-32.97	**600**
650	182.23	187.29	188.04	-5.85	-30.44	-32.40	**650**
700	180.46	185.34	186.09	-5.70	-29.88	-31.84	**700**
750	178.76	183.45	184.20	-5.55	-29.31	-31.28	**750**
800	177.10	181.60	182.35	-5.40	-28.75	-30.72	**800**
850	175.73	180.05	180.80	-5.24	-28.25	-30.22	**850**
900	174.40	178.53	179.28	-5.07	-27.75	-29.72	**900**
950	173.10	177.03	177.78	-4.91	-27.25	-29.22	**950**
1000	171.82	175.57	176.32	-4.75	-26.75	-28.72	**1000**
1050	170.56	174.31	175.06	-4.64	-26.44	-28.40	**1050**
1100	169.31	173.06	173.81	-4.53	-26.13	-28.09	**1100**
1150	168.09	171.84	172.59	-4.41	-25.81	-27.78	**1150**
1200	166.88	170.63	171.38	-4.30	-25.50	-27.47	**1200**
1250	165.96	169.71	170.46	-4.22	-25.29	-27.25	**1250**
1300	165.06	168.81	169.56	-4.15	-25.08	-27.04	**1300**
1350	164.17	167.92	168.67	-4.08	-24.86	-26.83	**1350**
1400	163.28	167.03	167.78	-4.00	-24.65	-26.62	**1400**
1450	162.59	166.16	166.91	-3.93	-24.44	-26.40	**1450**
1500	161.91	165.29	166.04	-3.85	-24.23	-26.19	**1500**
1550	161.23	164.42	165.17	-3.78	-24.01	-25.98	**1550**
1600	160.56	163.56	164.31	-3.70	-23.80	-25.77	**1600**
1650	159.85	162.85	163.60	-3.68	-23.73	-25.69	**1650**
1700	159.14	162.14	162.89	-3.66	-23.65	-25.62	**1700**
1750	158.43	161.43	162.18	-3.64	-23.58	-25.54	**1750**
1800	157.73	160.73	161.48	-3.63	-23.50	-25.47	**1800**
1850	157.21	160.03	160.96	-3.61	-23.43	-25.39	**1850**
1900	156.70	159.33	160.45	-3.59	-23.35	-25.32	**1900**
1950	156.20	158.64	159.95	-3.57	-23.28	-25.24	**1950**
2000	155.70	157.95	159.45	-3.55	-23.20	-25.17	**2000**
2050	155.16	157.41	158.91	-3.49	-23.09	-25.06	**2050**
2100	154.63	156.88	158.38	-3.44	-22.99	-24.95	**2100**
2150	154.11	156.36	157.86	-3.38	-22.88	-24.85	**2150**
2200	153.58	155.83	157.33	-3.33	-22.78	-24.74	**2200**
2250	153.25	155.31	156.81	-3.27	-22.67	-24.63	**2250**
2300	152.91	154.79	156.29	-3.21	-22.56	-24.53	**2300**
2350	152.58	154.27	155.77	-3.16	-22.46	-24.42	**2350**
2400	152.25	153.75	155.25	-3.10	-22.35	-24.32	**2400**
2450	151.75	153.25	154.75	-3.07	-22.26	-24.23	**2450**
2500	151.26	152.76	154.26	-3.04	-22.18	-24.14	**2500**
2550	150.76	152.26	153.76	-3.01	-22.09	-24.05	**2550**
2600	150.27	151.77	153.27	-2.97	-22.00	-23.97	**2600**
2650	149.77	151.27	152.77	-2.94	-21.91	-23.88	**2650**
2700	149.28	150.78	152.28	-2.91	-21.83	-23.79	**2700**
2750	148.79	150.29	151.79	-2.88	-21.74	-23.70	**2750**
2800	148.30	149.80	151.30	-2.85	-21.65	-23.62	**2800**
2850	147.95	149.45	150.77	-2.81	-21.51	-23.48	**2850**
2900	147.60	149.10	150.23	-2.78	-21.38	-23.34	**2900**
2950	147.25	148.75	149.69	-2.74	-21.24	-23.20	**2950**
3000	146.91	148.41	149.16	-2.70	-21.10	-23.07	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD
1 3/4 STORY

SQUARE FOOT COSTS

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	216.93	221.45	222.54	-7.25	-35.25	-38.20	**400**
450	213.73	218.03	219.14	-6.93	-34.17	-37.12	**450**
500	210.83	214.90	216.02	-6.63	-33.13	-36.07	**500**
550	208.04	211.89	213.03	-6.31	-32.05	-35.00	**550**
600	205.42	209.04	210.20	-6.00	-31.00	-33.95	**600**
650	203.36	206.75	207.93	-5.85	-30.42	-33.37	**650**
700	201.41	204.57	205.76	-5.70	-29.88	-32.82	**700**
750	199.49	202.43	203.63	-5.55	-29.30	-32.25	**750**
800	197.64	200.36	201.58	-5.40	-28.75	-31.70	**800**
850	196.01	198.61	199.85	-5.24	-28.24	-31.19	**850**
900	194.43	196.92	198.17	-5.07	-27.75	-30.70	**900**
950	192.86	195.24	196.50	-4.91	-27.24	-30.19	**950**
1000	191.34	193.60	194.87	-4.75	-26.75	-29.70	**1000**
1050	190.00	192.15	193.44	-4.64	-26.43	-29.38	**1050**
1100	188.70	190.73	192.04	-4.53	-26.13	-29.07	**1100**
1150	187.40	189.32	190.64	-4.41	-25.81	-28.75	**1150**
1200	186.12	187.93	189.26	-4.30	-25.50	-28.45	**1200**
1250	185.13	186.86	188.20	-4.22	-25.28	-28.23	**1250**
1300	184.16	185.82	187.16	-4.15	-25.08	-28.02	**1300**
1350	183.19	184.77	186.11	-4.07	-24.86	-27.81	**1350**
1400	182.24	183.74	185.09	-4.00	-24.65	-27.60	**1400**
1450	181.29	182.71	184.06	-3.92	-24.43	-27.38	**1450**
1500	180.35	181.70	183.05	-3.85	-24.23	-27.17	**1500**
1550	179.41	180.68	182.03	-3.77	-24.01	-26.96	**1550**
1600	178.48	179.68	181.03	-3.70	-23.80	-26.75	**1600**
1650	177.81	178.96	180.32	-3.68	-23.72	-26.67	**1650**
1700	177.16	178.26	179.62	-3.66	-23.65	-26.60	**1700**
1750	176.50	177.55	178.92	-3.64	-23.57	-26.52	**1750**
1800	175.86	176.86	178.23	-3.63	-23.50	-26.45	**1800**
1850	175.21	176.16	177.53	-3.61	-23.42	-26.37	**1850**
1900	174.57	175.47	176.84	-3.59	-23.35	-26.30	**1900**
1950	173.93	174.77	176.15	-3.57	-23.27	-26.22	**1950**
2000	173.29	174.09	175.47	-3.55	-23.20	-26.15	**2000**
2050	172.70	173.47	174.85	-3.49	-23.09	-26.04	**2050**
2100	172.12	172.85	174.24	-3.44	-22.99	-25.94	**2100**
2150	171.54	172.23	173.62	-3.38	-22.88	-25.83	**2150**
2200	170.96	171.62	173.01	-3.32	-22.78	-25.72	**2200**
2250	170.38	171.00	172.40	-3.27	-22.67	-25.61	**2250**
2300	169.81	170.39	171.79	-3.21	-22.56	-25.51	**2300**
2350	169.24	169.78	171.18	-3.16	-22.45	-25.40	**2350**
2400	168.67	169.17	170.58	-3.10	-22.35	-25.30	**2400**
2450	168.19	168.66	170.07	-3.07	-22.26	-25.21	**2450**
2500	167.71	168.15	169.56	-3.04	-22.18	-25.12	**2500**
2550	167.23	167.64	169.05	-3.01	-22.09	-25.03	**2550**
2600	166.76	167.13	168.54	-2.98	-22.00	-24.95	**2600**
2650	166.29	166.62	168.03	-2.94	-21.91	-24.86	**2650**
2700	165.82	166.12	167.53	-2.91	-21.83	-24.77	**2700**
2750	165.34	165.61	167.02	-2.88	-21.74	-24.68	**2750**
2800	164.87	165.11	166.52	-2.85	-21.65	-24.60	**2800**
2850	164.43	164.65	166.07	-2.81	-21.51	-24.46	**2850**
2900	163.99	164.19	165.61	-2.78	-21.38	-24.32	**2900**
2950	163.55	163.73	165.16	-2.74	-21.24	-24.18	**2950**
3000	163.11	163.27	164.70	-2.70	-21.10	-24.05	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

CLASS CD
2 STORY

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	252.92	273.92	267.92	-7.25	-35.25	-39.18	**400**
450	248.71	267.71	262.71	-6.94	-34.19	-38.12	**450**
500	244.73	261.73	258.73	-6.63	-33.13	-37.06	**500**
550	239.91	255.91	253.91	-6.31	-32.06	-35.99	**550**
600	236.22	251.22	249.22	-6.00	-31.00	-34.93	**600**
650	234.13	247.13	246.13	-5.85	-30.44	-34.37	**650**
700	231.11	243.11	243.11	-5.70	-29.88	-33.81	**700**
750	228.15	240.15	240.15	-5.55	-29.31	-33.24	**750**
800	225.25	236.25	237.25	-5.40	-28.75	-32.68	**800**
850	223.44	233.44	234.44	-5.24	-28.25	-32.18	**850**
900	220.67	230.67	231.67	-5.07	-27.75	-31.68	**900**
950	218.93	226.93	229.93	-4.91	-27.25	-31.18	**950**
1000	217.21	225.21	227.21	-4.75	-26.75	-30.68	**1000**
1050	214.70	222.70	225.70	-4.64	-26.44	-30.37	**1050**
1100	213.21	220.21	223.21	-4.52	-26.13	-30.06	**1100**
1150	211.73	217.73	221.73	-4.41	-25.81	-29.74	**1150**
1200	210.27	216.27	219.27	-4.30	-25.50	-29.43	**1200**
1250	208.92	213.92	217.92	-4.23	-25.29	-29.22	**1250**
1300	207.58	212.58	216.58	-4.15	-25.08	-29.01	**1300**
1350	206.25	210.25	215.25	-4.08	-24.86	-28.79	**1350**
1400	204.93	208.93	213.93	-4.00	-24.65	-28.58	**1400**
1450	203.61	207.61	212.61	-3.92	-24.44	-28.37	**1450**
1500	202.31	205.31	211.31	-3.85	-24.23	-28.16	**1500**
1550	201.00	204.00	210.00	-3.77	-24.01	-27.94	**1550**
1600	199.71	202.71	208.71	-3.70	-23.80	-27.73	**1600**
1650	198.55	201.55	207.55	-3.68	-23.73	-27.66	**1650**
1700	198.41	200.41	206.41	-3.66	-23.65	-27.58	**1700**
1750	197.26	199.26	205.26	-3.64	-23.58	-27.51	**1750**
1800	196.12	198.12	204.12	-3.63	-23.50	-27.43	**1800**
1850	194.98	196.98	202.98	-3.61	-23.43	-27.36	**1850**
1900	194.85	195.85	201.85	-3.59	-23.35	-27.28	**1900**
1950	193.72	194.72	201.72	-3.57	-23.28	-27.21	**1950**
2000	192.59	193.59	200.59	-3.55	-23.20	-27.13	**2000**
2050	192.43	192.43	199.43	-3.49	-23.09	-27.02	**2050**
2100	191.28	191.28	198.28	-3.44	-22.99	-26.92	**2100**
2150	190.13	190.13	198.13	-3.38	-22.88	-26.81	**2150**
2200	189.98	189.98	196.98	-3.33	-22.78	-26.71	**2200**
2250	188.83	188.83	195.83	-3.27	-22.67	-26.60	**2250**
2300	187.68	187.68	195.68	-3.21	-22.56	-26.49	**2300**
2350	187.54	186.54	194.54	-3.16	-22.46	-26.39	**2350**
2400	186.40	186.40	193.40	-3.10	-22.35	-26.28	**2400**
2450	186.27	185.27	193.27	-3.07	-22.26	-26.19	**2450**
2500	185.15	184.15	192.15	-3.04	-22.18	-26.11	**2500**
2550	184.53	183.53	191.53	-3.01	-22.09	-26.02	**2550**
2600	183.91	182.91	190.91	-2.97	-22.00	-25.93	**2600**
2650	183.29	182.04	190.29	-2.94	-21.91	-25.84	**2650**
2700	182.68	181.18	189.68	-2.91	-21.83	-25.76	**2700**
2750	182.06	180.31	189.06	-2.88	-21.74	-25.67	**2750**
2800	181.45	179.45	188.45	-2.85	-21.65	-25.58	**2800**
2850	180.79	178.79	187.79	-2.81	-21.51	-25.44	**2850**
2900	180.12	178.12	187.12	-2.77	-21.38	-25.31	**2900**
2950	179.46	177.46	186.46	-2.74	-21.24	-25.17	**2950**
3000	178.80	176.80	185.80	-2.70	-21.10	-25.03	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD
BI-LEVEL

SQUARE FOOT COSTS

Ground Area	FRAME		MASONRY	LOWER LEVEL FINISH ADJUSTMENTS				Ground Area
	Siding	Brick Veneer	Block Walls	20% Finish	40% Finish	60% Finish	80% Finish	
400	211.82	224.32	219.32	-30.40	-22.80	-15.20	0.00	**400**
450	207.64	219.89	214.89	-30.00	-22.50	-15.00	0.00	**450**
500	203.84	215.84	210.84	-29.60	-22.20	-14.80	0.00	**500**
550	200.05	211.55	207.05	-29.20	-21.90	-14.60	0.00	**550**
600	196.47	207.47	203.47	-28.80	-21.60	-14.40	0.00	**600**
650	193.74	203.99	200.49	-28.35	-21.26	-14.18	0.00	**650**
700	191.12	200.62	197.62	-27.90	-20.93	-13.95	0.00	**700**
750	188.36	197.86	195.11	-27.45	-20.59	-13.73	0.00	**750**
800	185.67	195.17	192.67	-27.00	-20.25	-13.50	0.00	**800**
850	183.87	193.12	190.62	-26.95	-20.21	-13.48	0.00	**850**
900	182.12	191.12	188.62	-26.90	-20.18	-13.45	0.00	**900**
950	180.41	189.16	186.91	-26.85	-20.14	-13.43	0.00	**950**
1000	178.75	187.25	185.25	-26.80	-20.10	-13.40	0.00	**1000**
1050	177.30	185.80	183.80	-26.75	-20.06	-13.38	0.00	**1050**
1100	175.89	184.39	182.39	-26.70	-20.03	-13.35	0.00	**1100**
1150	174.74	182.74	181.24	-26.65	-19.99	-13.33	0.00	**1150**
1200	173.63	181.13	180.13	-26.60	-19.95	-13.30	0.00	**1200**
1250	172.44	179.94	178.94	-26.60	-19.95	-13.30	0.00	**1250**
1300	171.27	178.77	177.77	-26.60	-19.95	-13.30	0.00	**1300**
1350	170.37	177.62	176.87	-26.60	-19.95	-13.30	0.00	**1350**
1400	169.48	176.48	175.98	-26.60	-19.95	-13.30	0.00	**1400**
1450	168.60	175.60	174.85	-26.60	-19.95	-13.30	0.00	**1450**
1500	167.73	174.73	173.73	-26.60	-19.95	-13.30	0.00	**1500**
1550	166.88	173.63	172.88	-26.60	-19.95	-13.30	0.00	**1550**
1600	166.03	172.53	172.03	-26.60	-19.95	-13.30	0.00	**1600**
1650	165.17	171.67	171.17	-26.48	-19.86	-13.24	0.00	**1650**
1700	164.32	170.82	170.32	-26.35	-19.76	-13.18	0.00	**1700**
1750	163.47	169.72	169.47	-26.23	-19.67	-13.11	0.00	**1750**
1800	162.64	168.64	168.64	-26.10	-19.58	-13.05	0.00	**1800**
1850	161.80	167.80	167.80	-25.98	-19.48	-12.99	0.00	**1850**
1900	160.98	166.98	166.98	-25.85	-19.39	-12.93	0.00	**1900**
1950	160.16	166.16	166.41	-25.73	-19.29	-12.86	0.00	**1950**
2000	159.34	165.34	165.84	-25.60	-19.20	-12.80	0.00	**2000**
2050	158.90	164.65	165.15	-25.60	-19.20	-12.80	0.00	**2050**
2100	158.47	163.97	164.47	-25.60	-19.20	-12.80	0.00	**2100**
2150	157.78	163.28	163.78	-25.60	-19.20	-12.80	0.00	**2150**
2200	157.11	162.61	163.11	-25.60	-19.20	-12.80	0.00	**2200**
2250	156.68	162.18	162.68	-25.60	-19.20	-12.80	0.00	**2250**
2300	156.26	161.76	162.26	-25.60	-19.20	-12.80	0.00	**2300**
2350	155.59	161.09	161.59	-25.60	-19.20	-12.80	0.00	**2350**
2400	154.93	160.43	160.93	-25.60	-19.20	-12.80	0.00	**2400**
2450	154.53	160.03	160.53	-25.60	-19.20	-12.80	0.00	**2450**
2500	154.14	159.64	160.14	-25.60	-19.20	-12.80	0.00	**2500**
2550	153.75	159.00	159.75	-25.60	-19.20	-12.80	0.00	**2550**
2600	153.36	158.36	159.36	-25.60	-19.20	-12.80	0.00	**2600**
2650	152.73	157.98	158.73	-25.60	-19.20	-12.80	0.00	**2650**
2700	152.09	157.59	158.09	-25.60	-19.20	-12.80	0.00	**2700**
2750	151.71	156.96	157.71	-25.60	-19.20	-12.80	0.00	**2750**
2800	151.33	156.33	157.33	-25.60	-19.20	-12.80	0.00	**2800**
2850	150.90	155.90	156.90	-25.60	-19.20	-12.80	0.00	**2850**
2900	150.47	155.47	156.47	-25.60	-19.20	-12.80	0.00	**2900**
2950	150.04	155.04	156.04	-25.60	-19.20	-12.80	0.00	**2950**
3000	149.62	154.62	155.62	-25.60	-19.20	-12.80	0.00	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

CLASS CD
TRI-LEVEL

Ground Area	FRAME		MASONRY	BASEMENT ADJUSTMENTS			Ground Area
	Siding	Brick Veneer	Block Walls	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	204.86	218.36	213.86	-7.25	-35.25	-37.22	**400**
450	201.52	214.46	210.33	-6.94	-34.19	-36.15	**450**
500	198.41	210.79	207.04	-6.63	-33.13	-35.09	**500**
550	195.47	207.28	203.91	-6.31	-32.06	-34.03	**550**
600	192.66	203.91	200.91	-6.00	-31.00	-32.97	**600**
650	190.44	201.12	198.50	-5.85	-30.44	-32.40	**650**
700	188.29	198.42	196.17	-5.70	-29.88	-31.84	**700**
750	186.21	195.78	193.90	-5.55	-29.31	-31.28	**750**
800	184.18	193.18	191.68	-5.40	-28.75	-30.72	**800**
850	182.44	191.25	189.94	-5.24	-28.25	-30.22	**850**
900	180.73	189.36	188.23	-5.07	-27.75	-29.72	**900**
950	179.05	187.49	186.55	-4.91	-27.25	-29.22	**950**
1000	177.40	185.65	184.90	-4.75	-26.75	-28.72	**1000**
1050	176.14	184.01	183.45	-4.64	-26.44	-28.40	**1050**
1100	174.89	182.39	182.02	-4.53	-26.13	-28.09	**1100**
1150	173.67	180.79	180.61	-4.41	-25.81	-27.78	**1150**
1200	172.46	179.21	179.21	-4.30	-25.50	-27.47	**1200**
1250	171.35	177.92	178.10	-4.22	-25.29	-27.25	**1250**
1300	170.26	176.64	177.01	-4.15	-25.08	-27.04	**1300**
1350	169.18	175.37	175.93	-4.07	-24.86	-26.83	**1350**
1400	168.11	174.11	174.86	-4.00	-24.65	-26.62	**1400**
1450	167.05	173.05	173.80	-3.93	-24.44	-26.40	**1450**
1500	165.99	171.99	172.74	-3.85	-24.23	-26.19	**1500**
1550	164.94	170.94	171.69	-3.77	-24.01	-25.98	**1550**
1600	163.89	169.89	170.64	-3.70	-23.80	-25.77	**1600**
1650	163.18	168.99	169.93	-3.68	-23.73	-25.69	**1650**
1700	162.47	168.09	169.22	-3.66	-23.65	-25.62	**1700**
1750	161.76	167.20	168.51	-3.64	-23.58	-25.54	**1750**
1800	161.06	166.31	167.81	-3.62	-23.50	-25.47	**1800**
1850	160.54	165.61	167.11	-3.61	-23.43	-25.39	**1850**
1900	160.03	164.91	166.41	-3.59	-23.35	-25.32	**1900**
1950	159.53	164.22	165.72	-3.57	-23.28	-25.24	**1950**
2000	159.03	163.53	165.03	-3.55	-23.20	-25.17	**2000**
2050	158.31	162.81	164.49	-3.49	-23.09	-25.06	**2050**
2100	157.59	162.09	163.96	-3.44	-22.99	-24.95	**2100**
2150	156.87	161.37	163.44	-3.38	-22.88	-24.85	**2150**
2200	156.16	160.66	162.91	-3.32	-22.78	-24.74	**2200**
2250	155.64	159.95	162.20	-3.27	-22.67	-24.63	**2250**
2300	155.12	159.24	161.49	-3.21	-22.56	-24.53	**2300**
2350	154.60	158.54	160.79	-3.16	-22.46	-24.42	**2350**
2400	154.08	157.83	160.08	-3.10	-22.35	-24.32	**2400**
2450	153.58	157.33	159.58	-3.07	-22.26	-24.23	**2450**
2500	153.09	156.84	159.09	-3.04	-22.18	-24.14	**2500**
2550	152.59	156.34	158.59	-3.01	-22.09	-24.05	**2550**
2600	152.10	155.85	158.10	-2.97	-22.00	-23.97	**2600**
2650	151.60	155.17	157.60	-2.94	-21.91	-23.88	**2650**
2700	151.11	154.49	157.11	-2.91	-21.83	-23.79	**2700**
2750	150.62	153.81	156.62	-2.88	-21.74	-23.70	**2750**
2800	150.13	153.13	156.13	-2.85	-21.65	-23.62	**2800**
2850	149.60	152.60	155.60	-2.81	-21.51	-23.48	**2850**
2900	149.06	152.06	155.06	-2.77	-21.38	-23.34	**2900**
2950	148.52	151.52	154.52	-2.74	-21.24	-23.20	**2950**
3000	147.99	150.99	153.99	-2.70	-21.10	-23.07	**3000**

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

HEATING AND COOLING SYSTEM ADJUSTMENTS: Additions or deductions per sq. ft. of ground area.

	Number of Stories							
	1	1+	1 1/4	1 1/2	1 3/4	2	Bi	Tri
HEATING SYSTEMS								
Forced-warm-air, without return ducts, deduct	-1.00	-1.00	-1.26	-1.50	-1.75	-2.00	-2.00	-1.50
Forced-hot-water/steam, add.	3.79	3.79	4.75	5.68	6.63	7.58	7.58	5.68
Electric wall heaters, baseboard type, deduct	-0.58	-0.58	-0.73	-0.87	-1.02	-1.16	-1.16	-0.87
Electric, ceiling radiant, deduct.	-1.06	-1.06	-1.33	-1.58	-1.85	-2.11	-2.11	-1.58
Electric wall heaters, deduct.	-3.02	-3.02	-3.79	-4.54	-5.29	-6.05	-6.05	-4.54
Radiant (in-floor), add.	3.97	3.97	4.98	5.95	6.94	7.94	7.94	5.95
Space heaters, deduct.	-3.05	-3.05	-3.83	-4.57	-5.34	-6.10	-6.10	-4.57
Wall or floor furnace, no ducts, deduct.	-2.76	-2.76	-3.46	-4.14	-4.83	-5.52	-5.52	-4.14
HEATING AND COOLING, COMBINED SYSTEMS								
Forced air, A/C using heating ducts, add.	7.09	7.09	8.90	10.64	12.42	14.19	14.19	10.64
Heat pump with supplemental heat, add.	4.56	4.56	5.73	6.85	7.99	9.13	9.13	6.85
Air conditioning only with separate ducts, add	8.54	8.54	10.71	12.81	14.95	17.08	17.08	12.81
No heating, deduct.	-5.24	-5.24	-6.57	-7.85	-9.16	-10.47	-10.47	-7.85

Wood burning unit added on to furnace: Add $2,428.75 to final cost of home. Includes materials and labor to connect to existing forced air system. Extra chimney or flue costs which may be required by local codes are not included.

OVERHANGS

Add per square foot as follows:

Stories	Full Story	3/4	1/2
Siding and block.	$77.89	$58.48	$31.63
Brick veneer.	81.48	59.58	31.82

MICHIGAN BASEMENT

Michigan basements can frequently be estimated by using 1/2 of the crawl space deduction. Deduct for no concrete floor: $4.67 per square foot of basement area.

PLUMBING, SEWER AND WATER

Average cost per fixture.	$1,174
Extra bath, three fixtures.	3,684
Two fixtures.	2,478
Water softener, automatic.	2,256
Manual.	1,434
Solar water heating system with panels.	7,625
No plumbing, deduct.	-7,057
Extra toilet.	1,219
Extra sink.	743
Separate shower (fiberglass).	1,134
Ceramic tile floor.	913
Ceramic tile wainscotting.	2,190
Ceramic tile tub alcove.	730
Bathroom vent fan.	196

WATER AND WASTE DISPOSAL

City water and sewer connections.	$2,575
Water well 200 ft..	10,073
Septic system 1,000 gallons.	4,342
2,000 gallons.	8,704

Locally derived costs should be entered on the front of the residential card.

MASONRY TRIM

Brick or equal, per sq. ft. of wall area.	$15.00
Brick 4' high, per lin. ft..	59.92
Brick full 1-story, per lin. ft..	119.77
Brick full 2-story, per lin. ft..	239.61
Stone or equal, per sq. ft. of wall area.	32.40

BASEMENT FINISH

Costs per square foot of floor area:

Recreation room.	$18.00
Finished living area.	32.47
Walk-out, below grade, cost of door.	1,610
Walk-out, above grade, cost of door.	2,145

BUILT-INS

Appliance allowance, (if not itemized).	$1,878
Cook top, counter top, four burners.	606
Dishwasher, built-in.	613
Garbage disposal.	209
Heater, bathroom, without fan.	189
With fan.	267
Hot tub, with whirlpool, built-in.	6,370
Hood, range, unvented.	267
Vented.	469
Intercom system, master station.	665
Satellite.	137
Whirlpool tub (Jacuzzi).	6,742
Whirlpool tub when it replaces regular bathtub.	5,483
Oven, single, built-in.	1,063
Microwave.	300
Range, drop in, with standard oven.	1,056
With self cleaning oven.	1,408
Sauna with heater and controls.	5,164
Trash compactor.	782
Vacuum, central system.	2,406

CONVERSION FACTORS: For 2 1/2, 3 and 3 1/2 story Single-family Residences
Multiply the 2 story cost for the equivalent Ground Area by the following factors:
2 1/2 story, use 1.16; 3 story, use 1.36; 3 1/2-story, use 1.52.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

FIREPLACES

Inside chimney, 1 story	$5,025
1 1/2 and 2 story	6,300
add for 2nd fireplace, same stack	4,200
Two-sided fireplace	7,250
Outside chimney, 1 story	6,125
1 1/2 and 2 story	7,550
Prefabricated, 1 story	2,375
Add if 2 story	525
Heat-circulating device	625
Raised hearth	400
Wood burning stove, free standing, permanent	2,250
Direct-vented (no chimney) gas fireplace	2,700

PORCHES AND DECKS: COMPONENT GUIDE

	CPP	CCP	CSEP	CGEP	WPP	WCP	WSEP	WGEP
FOUNDATION	X	X	X	X	X	X	X	X
FOOTINGS	X	X	X	X	X	X	X	X
STEPS	X	X	X	X	X	X	X	X
RAILS OR KNEE WALL		X	X			X	X	
ROOF		X	X	X		X	X	X
CEILING		X	X	X		X	X	X
SCREEN ON STUD WALL			X				X	
STUD WALL W/ WINDOWS AND SCREENS				X				X

CONCRETE FLOOR with 42" Foundation / WOOD FLOOR with 42" Foundation

Size for Rates	PLATFORM PORCH CPP	COVERED PORCH CCP	SCREEN-ENCLOSED PORCH CSEP	GLASS ENCLOSED PORCH CGEP	PLATFORM PORCH WPP	COVERED PORCH WCP	SCREEN-ENCLOSED PORCH WSEP	GLASS-ENCLOSED PORCH WGEP	Size for Rates
25	28.25	50.50	84.50	115.00	54.00	76.50	110.00	141.00	25
50	23.20	42.50	66.50	86.50	38.50	58.00	82.00	102.00	50
75	21.05	39.75	60.00	77.00	32.75	51.50	72.00	88.50	75
100	18.90	36.75	55.50	71.00	26.75	44.75	63.50	78.50	100
125	18.38	35.79	52.69	66.19	25.38	43.00	60.25	73.50	125
150	17.85	35.00	50.50	62.50	24.00	41.25	57.00	68.50	150
175	17.32	33.92	48.87	59.77	22.60	39.50	54.50	65.25	175
200	16.80	33.25	47.50	57.50	21.20	37.75	52.00	62.00	200
250	15.77	31.31	44.53	53.54	18.40	34.13	47.63	56.75	250
300	14.75	29.75	42.25	50.50	15.60	30.50	43.25	51.50	300
350	14.67	29.65	42.11	50.35	15.45	30.28	42.94	51.17	350
400	14.59	29.56	41.99	50.21	15.30	30.06	42.64	50.83	400
450	14.52	29.48	41.89	50.10	15.15	29.83	42.33	50.50	450
500	14.44	29.41	41.80	49.99	15.00	29.61	42.03	50.17	500
550	14.36	29.35	41.71	49.90	14.85	29.39	41.72	49.83	550
600	14.28	29.29	41.64	49.81	14.70	29.17	41.42	49.50	600
650	14.21	29.24	41.57	49.73	14.55	28.94	41.11	49.17	650
700	14.13	29.19	41.50	49.66	14.40	28.72	40.81	48.83	700

ADD / DEDUCT / WOOD DECKS

Size for Rates	BASEMENT UNDER	SHALLOW FOUNDATION	TREATED WOOD	PINE OR SIMILAR	REDWOOD OR CEDAR	Size for Rates
25	23.73	-16.10	43.42	34.69	46.88	25
50	23.15	-11.74	32.08	25.69	35.66	50
75	22.82	-9.78	26.56	21.20	32.16	75
100	22.56	-8.61	23.34	18.65	27.64	100
125	22.36	-7.76	22.29	17.77	27.20	125
150	22.17	-7.17	20.93	16.69	25.62	150
175	22.10	-6.65	19.85	15.83	24.37	175
200	21.97	-6.26	18.91	15.13	22.89	200
250	21.78	-5.67	17.55	13.99	21.69	250
300	21.65	-5.22	16.48	13.14	20.42	300
350	21.52	-4.89	15.63	12.47	19.42	350
400	21.39	-4.56	14.93	11.91	18.58	400
450	21.32	-4.37	14.33	11.42	17.89	450
500	21.19	-4.11	13.82	11.02	17.28	500
550	21.12	-3.98	13.38	10.67	16.74	550
600	21.06	-3.78	12.97	10.34	16.27	600
650	20.99	-3.65	12.62	10.07	15.86	650
700	20.93	-3.52	12.31	9.81	15.48	700

For 2-story porches, add 22% for open porches and 60% for enclosed porches. Wood decks include posts on minimal footings, joists, girder, railings, decking, and up to four risers. For additional risers add $105 each. For wood decks with roofs, subtract the platform porch rate from the covered porch rate (at the appropriate size for rates) and add the difference to the appropriate wood deck rate.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

ADJUSTMENTS AND ADDITIONS

GARAGES: Base costs include electric lighting.

On slab – 18" Foundation				On slab – 42" Foundation				
Size In Sq. Ft.	Siding	Block	Brick Veneer	Siding	Block	Brick Veneer	Finished Interior	Size In Sq. Ft.
240	43.55	47.53	54.12	49.62	55.81	60.90	8.93	**240**
308	39.64	42.71	47.92	45.05	50.40	53.72	8.48	**308**
352	37.75	40.36	44.92	42.77	47.73	50.27	8.28	**352**
400	35.99	38.21	42.18	40.68	45.31	47.14	8.02	**400**
440	34.95	37.23	41.08	39.45	43.88	45.84	7.95	**440**
480	34.03	36.32	40.10	38.34	42.58	44.73	7.82	**480**
528	33.06	35.40	39.05	37.23	41.27	43.49	7.69	**528**
576	32.21	34.56	38.08	36.19	40.03	42.38	7.63	**575**
600	31.82	34.16	37.69	35.73	39.51	41.92	7.56	**600**
624	31.43	33.84	37.36	35.27	38.99	41.53	7.50	**624**
800	29.34	31.75	35.27	32.80	36.06	39.12	7.17	**800**
864	28.88	31.23	34.62	32.21	35.47	38.40	7.11	**864**
1020	27.97	30.19	33.38	31.10	34.10	36.90	6.98	**1020**
Common wall deduction for attached garage								
1/2-wall	958	1,069	1,324	1,174	1,376	1,571	—	**1/2-wall**
1-wall	1,917	2,217	2,647	2,354	2,751	3,136	—	**1-wall**
1 1/2-wall	2,875	3,325	3,971	3,527	4,127	4,707	—	**1 1/2-wall**
2-wall	3,827	4,434	5,294	4,701	5,496	6,279	—	**2-wall**

No concrete floor, deduct per sq. ft. . . . . -$5.93

Base cost includes uninsulated single or double garage doors, depending on the size of the garage. For insulated doors, add per square foot of door:

Single: . . . . . $4.04 Double: $3.00

Door opener, radio controlled add. 463

For basement garage, add to residence:

1-car. . . . . $2.380 2-car. $3,325
1-1/2-car. 2,836 3-car. 4,401

For pole construction deduct 25% from 18" Foundation, Siding rate.

For living area above garage use overhang rates. Base cost contains forced-warm-air heat only. For other types of heating/cooling, use the 1-Story Heating and Cooling Adjustments for this square footage only.

For storage area above garage, add $11.67 per square foot (stairway, floorboards, electrical, 6-foot headroom).

BALCONIES (Airing)

(Cost per square foot of floor area:)

Wood floors. $29.00
Cement composition floor. 42.00
Add for roof. 17.95

BREEZEWAYS

Cost per square foot of floor area. Includes roof, ceiling, floor and walls. Heat not included.

	FINISHED INTERIOR	UNFINISHED INTERIOR
Framed wall, solid.	$58.22	$46.10
knee wall w/ glass and screen panel. . .	77.72	67.55
Screen only.	44.60	35.66

CARPORTS

Cost per square foot of area covered. Includes roof structure and cover, posts, bracing, paint and concrete slab.

Aluminum, corrugated. $13.04
Composition shingles. 14.54
Built-up tar and gravel. 14.87
Wood shingles. 16.50
Fiberglass. 12.71

DRIVES, WALKS AND PATIOS

(Cost per square foot of floor area:)

Crushed rock. $2.34
Asphalt paving. 3.09
Asphalt paving w/sealer. 3.42
Concrete paving 3-1/2". 6.66
4". 6.90
4" reinforced. 7.80
5" reinforced. 8.26
Brick on 2" sand base. 17.62
Flagstone on 2" sand base. 20.11
Patio blocks on 2" sand base. 15.18

Please note that the above costs are valid for areas of 100 to 1,000 square feet. For areas less than 100 square feet, add from 10% to 100% per square foot. For areas greater than 1,000 square feet, deduct from 10% to 30% per square foot.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

GREENHOUSES

The following are average costs per square foot for stock residential even span and lean-to greenhouses. Both greenhouses include a foundation and vents. No electrical, heating, or watering devices are included. The even span is free standing with four walls and a door on the gable end. The lean-to shares one wall with an adjoining building. Use the lump sum adjustment to further refine the cost.

SQUARE FOOT COSTS:
Per square foot of floor area.

AREA SQ. FT.	EVEN SPAN	LEAN-TO
50	$97.50	$96.00
100	83.00	80.00
150	76.00	72.00
200	71.00	67.00
250	67.50	62.50
300	65.00	60.50
400	61.50	56.00
600	56.00	49.75
800	53.00	45.75
1,000	49.75	-------

SQUARE FOOT ADJUSTMENTS:
Make the following adjustments to the square foot costs above.

Professional labor	(base)
Amateur workmanship	-20%
Custom Installation	+25%
Planting benches	$8.04
Partitions, glazed, per square foot of partition	$18.05
Not tempered	(base)
Tempered glass	+25%
Tinted glass	+15%
Insulate Glass	+60%
Pipe frame	-25%
Polyethylene Cover	-20%

LUMP SUM ADJUSTMENTS: Make the following Lump Sum additions as necessary.

AREA SQ. FT.	PLAIN GABLE END WALL DEDUCTION
50	396
100	838
150	838
200	1,073
250	1,073
300	1,073
400	1,362
600	1,362
800	1,362
1,000	1,707

For gable end doors, add	$1,062
Heaters	1,110
Humidifiers	960
Coolers	1,760
Ventilating fans	585

SOLAR ROOMS


The following are average costs per square foot for three-sided lean-to glass solar rooms with curved eaves attached to a permanent structure used for living space or commercial applications. Costs include one end wall door, foundations and vents or windows. Floor, heat, electrical and plumbing are not included.

SQUARE FOOT COSTS:
Per square foot of floor area.

AREA SQ. FT.	COST
50	$183.20
100	151.65
150	137.96
200	128.59
250	122.88
300	115.42
400	108.33
600	98.44
800	91.33
1,000	85.27

ADJUSTMENTS

Extra tall bays	+15%
Laminated wood framing	+10%
Straight eaves	-7%
Custom designed	+50%
For corner hips and valleys, add per square ft.	$45.51
For decorative lights incorporated into frame members, add per linear foot	29.10
For built-in shades, add per square foot	21.01
For motorized operation, add per operator	1,475

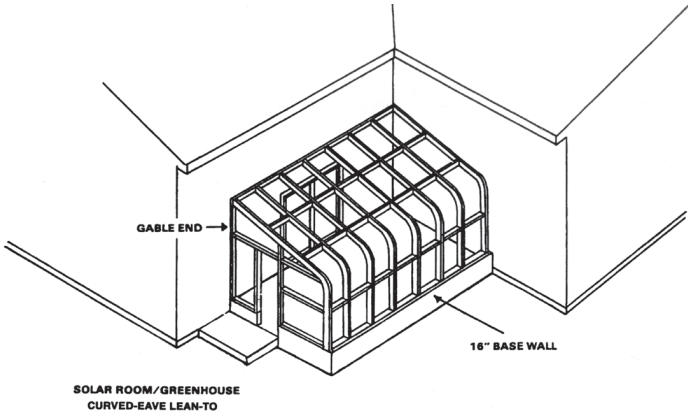

SOLAR ROOM/GREENHOUSE
CURVED-EAVE LEAN-TO

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.