
LOG HOMES

DESCRIPTIONS

Log Homes are residences with log exterior walls. Log homes are usually precut and packaged kits, erected using skilled labor for construction and installation of fixtures. The finished structure will conform to building codes and is often used as a primary residence. Log homes have been found to be somewhat more costly than similar-quality homes of a more conventional nature. For amateur workmanship, costs should be reduced by 15% to 30% to reflect primarily unsupervised, unskilled labor.

Log homes are categorized into four different classes, CD through B. Basic descriptions, photographs, and specifications are provided for each of these qualities.

Photographs are intended to illustrate the general characteristics of this type of residence in a given class.

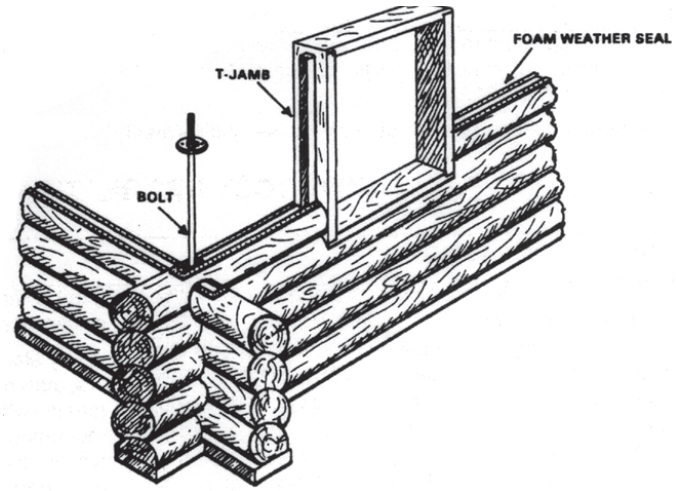

SQUARE FOOT COSTS

The square foot costs include Kit assembly and installation on a reasonably level site; finished interior with kitchen and bathroom; basement; forced-air heating.

The square foot costs do not include Public sewer connections; appliances; drapes; garages; and other optional items.

ADJUSTMENTS AND ADDITIONS

For adjustments and additions for other than basement, please refer to the corresponding site-built adjustment and addition pages.

For log sizes other than 6” diameter, add the following:

Pine

		6”	8”	10”	12”	14”	16”
All Classes							
1 Story	Base		2%	4%	7%	8%	10%
1 1/2 Story	Base		2%	3%	6%	7%	8%
2 Story	Base		3%	5%	8%	10%	12%

Pine

		6”	8”	10”	12”	14”	16”
All Classes							
1 Story	Base		4%	6%	10%	11%	13%
1 1/2 Story	Base		3%	5%	8%	9%	10%
2 Story	Base		4%	7%	11%	13%	15%

Example: Adjustments for a Class CD Log Home can be found in the Class CD site-built section, Page 52. A pricing example is included at the end of the section.

GARAGES

For log wall garages, please refer to the corresponding site built garage pages and add 15% to the siding cost. Example: The cost for a 440-square feet, Class C, log wall detached garage with 18” footings can be found on Page 70. The cost per square foot for 440-square foot of siding is $30.15, which, multiplied by 1.15, gives a cost of $34.67 per square foot for the log wall garage.

DEPRECIATION

Depreciation schedules can be found on Page 156.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS B

LOG HOMES





GENERAL DESCRIPTION

Class B Log Homes are above average in quality of both materials and workmanship. The floor plan may include some custom interior features. Materials and workmanship are roughly equivalent to those of the Class B conventional house. Substitute materials of equivalent price and quality may be found in place of some of the materials listed below.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Pine or cedar logs, 6” in diameter, tongue and grooved, precut and numbered, preservative treated; wood double-hung windows.

ROOF STRUCTURE: Pre-assembled truss, plywood sheathing, or open rafters with exposed wood.

INTERIOR PARTITIONS AND FINISH: 2” x 4” stud framing, 16” o.c.; painted drywall or good quality plywood paneling; good-quality panel doors; hardwood trim; closet shelving, bedroom closets are walk-in or full size with sliding doors.

INSULATION: Foam strip seal between logs; floor, wall, and ceiling insulation for an extreme climate.

FLOOR FINISH: 5/8” plywood or equivalent, good quality carpet and pad, vinyl tile, hardwood, or linoleum.

CEILING: Cathedral ceiling or trusses with drywall; or a combination of the two.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOORS: Concrete slab, floor drain.

FLOOR CONSTRUCTION: 5/8” plywood; wood joists and bridging.

HEATING AND AIR CONDITIONING: Forced air heating with good output and ductwork.

ELECTRICAL: Good number of outlets and fixtures.

PLUMBING: Same as the conventional B house.

BUILT-IN UNITS: Hardwood or hardwood veneer kitchen cabinets. Counter tops ceramic tile or laminated plastic.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	253.24	258.07	-10.25	-52.50	-59.80	**400**
450	247.81	252.50	-9.81	-50.75	-58.05	**450**
500	243.03	247.57	-9.38	-49.00	-56.30	**500**
550	238.80	243.23	-8.94	-47.25	-54.55	**550**
600	234.93	239.24	-8.50	-45.50	-52.80	**600**
650	232.19	236.41	-8.31	-44.56	-51.86	**650**
700	229.66	233.79	-8.13	-43.63	-50.93	**700**
750	227.35	231.39	-7.94	-42.69	-49.99	**750**
800	225.18	229.14	-7.75	-41.75	-49.05	**800**
850	223.28	227.17	-7.44	-40.94	-48.24	**850**
900	221.47	225.30	-7.13	-40.13	-47.43	**900**
950	219.77	223.53	-6.81	-39.31	-46.61	**950**
1000	218.13	221.84	-6.50	-38.50	-45.80	**1000**
1050	216.95	220.59	-6.44	-38.06	-45.36	**1050**
1100	215.83	219.40	-6.38	-37.63	-44.93	**1100**
1150	214.75	218.28	-6.31	-37.19	-44.49	**1150**
1200	213.72	217.20	-6.25	-36.75	-44.05	**1200**
1250	212.87	216.29	-6.16	-36.44	-43.74	**1250**
1300	212.04	215.42	-6.06	-36.12	-43.43	**1300**
1350	211.25	214.59	-5.97	-35.81	-43.11	**1350**
1400	210.48	213.78	-5.88	-35.50	-42.80	**1400**
1450	209.72	212.98	-5.78	-35.19	-42.49	**1450**
1500	208.98	212.21	-5.69	-34.88	-42.18	**1500**
1550	208.34	211.52	-5.59	-34.56	-41.86	**1550**
1600	207.72	210.86	-5.50	-34.25	-41.55	**1600**
1650	207.25	210.36	-5.47	-34.13	-41.43	**1650**
1700	206.79	209.87	-5.44	-34.00	-41.30	**1700**
1750	206.32	209.36	-5.41	-33.88	-41.18	**1750**
1800	205.85	208.86	-5.38	-33.75	-41.05	**1800**
1850	205.38	208.36	-5.34	-33.63	-40.93	**1850**
1900	204.91	207.86	-5.31	-33.50	-40.80	**1900**
1950	204.42	207.35	-5.28	-33.38	-40.68	**1950**
2000	203.95	206.84	-5.25	-33.25	-40.55	**2000**
2050	203.41	206.28	-5.06	-33.06	-40.36	**2050**
2100	202.87	205.73	-4.88	-32.88	-40.18	**2100**
2150	202.34	205.16	-4.69	-32.69	-39.99	**2150**
2200	201.81	204.61	-4.50	-32.50	-39.80	**2200**
2250	201.27	204.05	-4.31	-32.31	-39.61	**2250**
2300	200.74	203.49	-4.13	-32.13	-39.43	**2300**
2350	200.21	202.95	-3.94	-31.94	-39.24	**2350**
2400	199.69	202.41	-3.75	-31.75	-39.05	**2400**
2450	199.21	201.90	-3.71	-31.61	-38.91	**2450**
2500	198.73	201.40	-3.68	-31.46	-38.76	**2500**
2550	198.25	200.91	-3.64	-31.32	-38.62	**2550**
2600	197.78	200.43	-3.61	-31.18	-38.48	**2600**
2650	197.32	199.95	-3.57	-31.04	-38.34	**2650**
2700	196.85	199.47	-3.54	-30.89	-38.19	**2700**
2800	196.09	198.65	-3.50	-30.75	-38.05	**2800**
2900	195.09	197.62	-3.25	-30.38	-37.68	**2900**
3000	194.10	196.61	-3.00	-30.00	-37.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class B site-built adjustments, Pages 102-105.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS B
1 1/2 STORY

LOG HOMES

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	324.53	329.30	-10.25	-52.50	-59.80	**400**
450	318.51	323.13	-9.81	-50.75	-58.05	**450**
500	313.13	317.60	-9.38	-49.00	-56.30	**500**
550	308.21	312.54	-8.94	-47.25	-54.55	**550**
600	303.65	307.82	-8.50	-45.50	-52.80	**600**
650	300.49	304.57	-8.31	-44.56	-51.86	**650**
700	297.53	301.53	-8.13	-43.63	-50.93	**700**
750	294.75	298.66	-7.94	-42.69	-49.99	**750**
800	292.11	295.92	-7.75	-41.75	-49.05	**800**
850	289.84	293.57	-7.44	-40.94	-48.24	**850**
900	287.66	291.31	-7.13	-40.13	-47.43	**900**
950	285.56	289.14	-6.81	-39.31	-46.61	**950**
1000	283.53	287.03	-6.50	-38.50	-45.80	**1000**
1050	282.25	285.69	-6.44	-38.06	-45.36	**1050**
1100	281.02	284.40	-6.38	-37.63	-44.93	**1100**
1150	279.83	283.15	-6.31	-37.19	-44.49	**1150**
1200	278.68	281.95	-6.25	-36.75	-44.05	**1200**
1250	277.53	280.75	-6.16	-36.44	-43.74	**1250**
1300	276.41	279.57	-6.06	-36.13	-43.43	**1300**
1350	275.31	278.43	-5.97	-35.81	-43.11	**1350**
1400	274.23	277.31	-5.88	-35.50	-42.80	**1400**
1450	273.12	276.15	-5.78	-35.19	-42.49	**1450**
1500	272.02	275.02	-5.69	-34.88	-42.18	**1500**
1550	270.94	273.90	-5.59	-34.56	-41.86	**1550**
1600	269.87	272.80	-5.50	-34.25	-41.55	**1600**
1650	268.99	271.88	-5.47	-34.13	-41.43	**1650**
1700	268.12	270.98	-5.44	-34.00	-41.30	**1700**
1750	267.26	270.09	-5.41	-33.88	-41.18	**1750**
1800	266.41	269.20	-5.38	-33.75	-41.05	**1800**
1850	265.57	268.34	-5.34	-33.63	-40.93	**1850**
1900	264.75	267.48	-5.31	-33.50	-40.80	**1900**
1950	263.93	266.63	-5.28	-33.38	-40.68	**1950**
2000	263.12	265.79	-5.25	-33.25	-40.55	**2000**
2050	262.28	264.92	-5.06	-33.06	-40.36	**2050**
2100	261.43	264.05	-4.88	-32.88	-40.18	**2100**
2150	260.60	263.19	-4.69	-32.69	-39.99	**2150**
2200	259.77	262.33	-4.50	-32.50	-39.80	**2200**
2250	258.96	261.50	-4.31	-32.31	-39.61	**2250**
2300	258.15	260.67	-4.13	-32.13	-39.43	**2300**
2350	257.35	259.85	-3.94	-31.94	-39.24	**2350**
2400	256.55	259.03	-3.75	-31.75	-39.05	**2400**
2450	255.82	258.28	-3.71	-31.61	-38.91	**2450**
2500	255.10	257.54	-3.68	-31.47	-38.77	**2500**
2550	254.39	256.80	-3.64	-31.32	-38.62	**2550**
2600	253.68	256.07	-3.61	-31.18	-38.48	**2600**
2650	252.83	255.20	-3.57	-31.04	-38.34	**2650**
2700	252.00	254.33	-3.54	-30.89	-38.19	**2700**
2800	251.09	253.40	-3.50	-30.75	-38.05	**2800**
2900	249.68	251.97	-3.25	-30.38	-37.68	**2900**
3000	248.28	250.55	-3.00	-30.00	-37.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class B site-built adjustments, Pages 102-105.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOG HOMES

CLASS B
2 STORY

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	409.37	415.82	-10.25	-52.50	-59.80	**400**
450	402.49	408.99	-9.81	-50.75	-58.05	**450**
500	396.47	403.00	-9.38	-49.00	-56.30	**500**
550	391.09	397.65	-8.94	-47.25	-54.55	**550**
600	386.20	392.79	-8.50	-45.50	-52.80	**600**
650	382.54	387.91	-8.31	-44.56	-51.86	**650**
700	378.12	385.47	-8.13	-43.63	-50.93	**700**
750	375.77	382.95	-7.94	-42.69	-49.99	**750**
800	373.36	380.40	-7.75	-41.75	-49.05	**800**
850	371.05	377.94	-7.44	-40.94	-48.24	**850**
900	368.69	375.47	-7.13	-40.13	-47.42	**900**
950	366.32	372.99	-6.81	-39.31	-46.61	**950**
1000	364.00	370.52	-6.50	-38.50	-45.80	**1000**
1050	362.02	368.46	-6.44	-38.06	-45.36	**1050**
1100	360.09	366.42	-6.38	-37.63	-44.93	**1100**
1150	358.18	364.42	-6.31	-37.19	-44.49	**1150**
1200	356.28	362.44	-6.25	-36.75	-44.05	**1200**
1250	354.53	360.61	-6.16	-36.44	-43.74	**1250**
1300	352.85	358.81	-6.06	-36.13	-43.43	**1300**
1350	351.16	357.07	-5.97	-35.81	-43.11	**1350**
1400	349.52	355.34	-5.88	-35.50	-42.80	**1400**
1450	347.88	353.67	-5.78	-35.19	-42.49	**1450**
1500	346.28	351.99	-5.69	-34.88	-42.18	**1500**
1550	344.71	350.36	-5.59	-34.56	-41.86	**1550**
1600	343.17	348.77	-5.50	-34.25	-41.55	**1600**
1650	341.84	347.40	-5.47	-34.13	-41.43	**1650**
1700	340.57	346.03	-5.44	-34.00	-41.30	**1700**
1750	339.29	344.69	-5.41	-33.88	-41.18	**1750**
1800	338.02	343.39	-5.38	-33.75	-41.05	**1800**
1850	336.79	342.10	-5.34	-33.63	-40.92	**1850**
1900	335.60	340.88	-5.31	-33.50	-40.80	**1900**
1950	334.44	339.64	-5.28	-33.38	-40.68	**1950**
2000	333.29	338.43	-5.25	-33.25	-40.55	**2000**
2050	332.06	337.20	-5.06	-33.06	-40.36	**2050**
2100	330.92	335.98	-4.88	-32.88	-40.18	**2100**
2150	329.75	334.81	-4.69	-32.69	-39.99	**2150**
2200	328.60	333.60	-4.50	-32.50	-39.80	**2200**
2250	327.50	332.47	-4.31	-32.31	-39.61	**2250**
2300	326.38	331.30	-4.13	-32.13	-39.43	**2300**
2350	325.30	330.18	-3.94	-31.94	-39.24	**2350**
2400	324.24	329.10	-3.75	-31.75	-39.05	**2400**
2450	323.24	328.04	-3.71	-31.61	-38.91	**2450**
2500	322.24	327.04	-3.68	-31.46	-38.76	**2500**
2550	321.27	326.03	-3.64	-31.32	-38.62	**2550**
2600	320.30	325.02	-3.61	-31.18	-38.48	**2600**
2650	319.60	324.31	-3.57	-31.04	-38.34	**2650**
2700	318.89	323.59	-3.54	-30.89	-38.19	**2700**
2800	318.12	322.81	-3.50	-30.75	-38.05	**2800**
2900	316.91	321.57	-3.25	-30.38	-37.68	**2900**
3000	315.71	320.34	-3.00	-30.00	-37.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class B site-built adjustments, Pages 102-105.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS BC

LOG HOMES





GENERAL DESCRIPTION

Class BC Log Homes are above average in quality of both materials and workmanship. The floor plan may include some custom interior features. Materials and workmanship are roughly equivalent to those of the Class BC conventional house. Substitute materials of equivalent price and quality may be found in place of some of the materials listed below.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Pine or cedar logs, 6” in diameter, tongue and grooved, precut and numbered, preservative treated; wood double-hung windows.

ROOF STRUCTURE: Pre-assembled truss, plywood sheathing, or open rafters with exposed wood.

INTERIOR PARTITIONS AND FINISH: 2” x 4” stud framing, 16” o.c.; painted drywall or good quality plywood paneling; good-quality hollow-core doors; hardwood trim; closet shelving, bedroom closets are walk-in or full size with sliding doors.

INSULATION: Foam strip seal between logs; floor, wall, and ceiling insulation for an extreme climate.

FLOOR FINISH: 5/8” plywood or equivalent, good quality carpet and pad, vinyl tile, hardwood, or linoleum.

CEILING: Cathedral ceiling or trusses with drywall; or a combination of the two.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOORS: Concrete slab, floor drain.

FLOOR CONSTRUCTION: 5/8” plywood; wood joists and bridging.

HEATING AND AIR CONDITIONING: Forced air heating with good output and ductwork.

ELECTRICAL: Good number of outlets and fixtures.

PLUMBING: Same as the conventional BC house.

BUILT-IN UNITS: Hardwood or hardwood veneer kitchen cabinets. Counter tops ceramic tile or laminated plastic.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOG HOMES

CLASS BC
1 STORY

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	222.25	226.57	-9.50	-47.00	-53.30	**400**
450	217.60	221.80	-9.06	-45.44	-51.74	**450**
500	213.42	217.49	-8.63	-43.88	-50.18	**500**
550	209.73	213.69	-8.19	-42.31	-48.61	**550**
600	206.29	210.15	-7.75	-40.75	-47.05	**600**
650	203.89	207.67	-7.50	-39.94	-46.24	**650**
700	201.64	205.34	-7.25	-39.13	-45.43	**700**
750	199.59	203.22	-7.00	-38.31	-44.61	**750**
800	197.64	201.20	-6.75	-37.50	-43.80	**800**
850	195.96	199.45	-6.56	-36.81	-43.11	**850**
900	194.34	197.77	-6.38	-36.13	-42.43	**900**
950	192.45	195.84	-6.19	-35.44	-41.74	**950**
1000	190.62	193.95	-6.00	-34.75	-41.05	**1000**
1050	189.77	193.05	-5.88	-34.31	-40.61	**1050**
1100	188.95	192.19	-5.75	-33.88	-40.18	**1100**
1150	188.07	191.27	-5.63	-33.44	-39.74	**1150**
1200	187.22	190.37	-5.50	-33.00	-39.30	**1200**
1250	186.53	189.64	-5.44	-32.75	-39.05	**1250**
1300	185.86	188.92	-5.38	-32.50	-38.80	**1300**
1350	185.16	188.19	-5.31	-32.25	-38.55	**1350**
1400	184.47	187.47	-5.25	-32.00	-38.30	**1400**
1450	183.78	186.74	-5.19	-31.75	-38.05	**1450**
1500	183.09	186.03	-5.13	-31.50	-37.80	**1500**
1550	182.41	185.31	-5.06	-31.25	-37.55	**1550**
1600	181.74	184.60	-5.00	-31.00	-37.30	**1600**
1650	181.18	184.02	-4.97	-30.88	-37.18	**1650**
1700	180.64	183.45	-4.94	-30.75	-37.05	**1700**
1750	180.10	182.88	-4.91	-30.63	-36.93	**1750**
1800	179.57	182.32	-4.88	-30.50	-36.80	**1800**
1850	179.04	181.77	-4.84	-30.38	-36.68	**1850**
1900	178.52	181.22	-4.81	-30.25	-36.55	**1900**
1950	178.00	180.68	-4.78	-30.13	-36.43	**1950**
2000	177.48	180.14	-4.75	-30.00	-36.30	**2000**
2050	176.94	179.58	-4.59	-29.84	-36.14	**2050**
2100	176.41	179.02	-4.44	-29.69	-35.99	**2100**
2150	175.88	178.47	-4.28	-29.53	-35.83	**2150**
2200	175.35	177.93	-4.13	-29.38	-35.68	**2200**
2250	174.83	177.40	-3.97	-29.22	-35.52	**2250**
2300	174.32	176.86	-3.81	-29.06	-35.36	**2300**
2350	173.82	176.34	-3.66	-28.91	-35.21	**2350**
2400	173.32	175.82	-3.50	-28.75	-35.05	**2400**
2450	172.83	175.32	-3.47	-28.61	-34.91	**2450**
2500	172.35	174.83	-3.44	-28.46	-34.76	**2500**
2550	171.88	174.34	-3.41	-28.32	-34.62	**2550**
2600	171.42	173.85	-3.39	-28.18	-34.48	**2600**
2650	170.95	173.37	-3.36	-28.04	-34.34	**2650**
2700	170.49	172.89	-3.33	-27.89	-34.19	**2700**
2800	169.73	172.10	-3.30	-27.75	-34.05	**2800**
2900	168.74	171.09	-3.15	-27.38	-33.68	**2900**
3000	167.77	170.11	-3.00	-27.00	-33.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class BC site-built adjustments, Pages 86-89.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS BC
1 1/2 STORY

LOG HOMES

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	272.15	276.50	-9.50	-47.00	-53.30	**400**
450	267.40	271.61	-9.06	-45.44	-51.74	**450**
500	263.11	267.19	-8.63	-43.88	-50.18	**500**
550	259.16	263.11	-8.19	-42.31	-48.61	**550**
600	255.46	259.28	-7.75	-40.75	-47.05	**600**
650	252.93	256.66	-7.50	-39.94	-46.24	**650**
700	250.55	254.19	-7.25	-39.13	-45.43	**700**
750	248.29	251.84	-7.00	-38.31	-44.61	**750**
800	246.14	249.59	-6.75	-37.50	-43.80	**800**
850	244.55	247.93	-6.56	-36.81	-43.11	**850**
900	243.03	246.34	-6.38	-36.13	-42.43	**900**
950	241.56	244.81	-6.19	-35.44	-41.74	**950**
1000	240.15	243.33	-6.00	-34.75	-41.05	**1000**
1050	238.85	241.98	-5.88	-34.31	-40.61	**1050**
1100	237.59	240.66	-5.75	-33.88	-40.18	**1100**
1150	243.03	246.34	-6.38	-36.13	-42.43	**1150**
1200	241.56	244.81	-6.19	-35.44	-41.74	**1200**
1250	240.15	243.33	-6.00	-34.75	-41.05	**1250**
1300	238.85	241.98	-5.88	-34.31	-40.61	**1300**
1350	237.59	240.66	-5.75	-33.88	-40.18	**1350**
1400	231.13	233.90	-5.25	-32.00	-38.30	**1400**
1450	230.14	232.89	-5.19	-31.75	-38.05	**1450**
1500	229.18	231.90	-5.13	-31.50	-37.80	**1500**
1550	228.22	230.92	-5.06	-31.25	-37.55	**1550**
1600	227.28	229.95	-5.00	-31.00	-37.30	**1600**
1650	226.49	229.13	-4.97	-30.88	-37.18	**1650**
1700	225.70	228.31	-4.94	-30.75	-37.05	**1700**
1750	224.93	227.50	-4.91	-30.63	-36.93	**1750**
1800	224.16	226.71	-4.88	-30.50	-36.80	**1800**
1850	223.43	225.95	-4.84	-30.38	-36.68	**1850**
1900	222.70	225.19	-4.81	-30.25	-36.55	**1900**
1950	221.98	224.45	-4.78	-30.13	-36.43	**1950**
2000	221.27	223.71	-4.75	-30.00	-36.30	**2000**
2050	220.55	222.96	-4.59	-29.85	-36.15	**2050**
2100	219.83	222.22	-4.44	-29.69	-35.99	**2100**
2150	219.12	221.48	-4.28	-29.53	-35.83	**2150**
2200	218.42	220.75	-4.13	-29.38	-35.68	**2200**
2250	217.74	220.05	-3.97	-29.22	-35.52	**2250**
2300	217.07	219.36	-3.81	-29.06	-35.36	**2300**
2350	216.40	218.67	-3.66	-28.91	-35.21	**2350**
2400	215.74	217.98	-3.50	-28.75	-35.05	**2400**
2450	215.11	217.34	-3.47	-28.61	-34.91	**2450**
2500	214.49	216.70	-3.44	-28.47	-34.77	**2500**
2550	213.86	216.06	-3.41	-28.32	-34.62	**2550**
2600	213.24	215.43	-3.39	-28.18	-34.48	**2600**
2650	212.53	214.68	-3.36	-28.04	-34.34	**2650**
2700	211.81	213.93	-3.33	-27.89	-34.19	**2700**
2800	211.04	213.14	-3.30	-27.75	-34.05	**2800**
2900	209.82	211.90	-3.15	-27.38	-33.68	**2900**
3000	208.61	210.66	-3.00	-27.00	-33.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class BC site-built adjustments, Pages 86-89.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOG HOMES

CLASS BC
2 STORY

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	345.47	354.46	-9.50	-47.00	-53.30	**400**
450	339.86	348.48	-9.06	-45.44	-51.74	**450**
500	333.49	341.80	-8.63	-43.88	-50.18	**500**
550	330.18	338.15	-8.19	-42.31	-48.61	**550**
600	326.78	334.47	-7.75	-40.75	-47.05	**600**
650	324.11	331.54	-7.50	-39.94	-46.24	**650**
700	321.44	328.65	-7.25	-39.13	-45.43	**700**
750	318.79	325.77	-7.00	-38.31	-44.61	**750**
800	316.17	322.95	-6.75	-37.50	-43.80	**800**
850	313.74	320.35	-6.56	-36.81	-43.11	**850**
900	311.34	317.79	-6.38	-36.13	-42.43	**900**
950	308.98	315.31	-6.19	-35.44	-41.74	**950**
1000	306.66	312.83	-6.00	-34.75	-41.05	**1000**
1050	304.67	310.72	-5.88	-34.31	-40.61	**1050**
1100	302.71	308.65	-5.75	-33.88	-40.18	**1100**
1150	300.84	306.61	-5.63	-33.44	-39.74	**1150**
1200	298.94	304.62	-5.50	-33.00	-39.30	**1200**
1250	297.31	302.90	-5.44	-32.75	-39.05	**1250**
1300	295.76	301.21	-5.38	-32.50	-38.80	**1300**
1350	294.19	299.59	-5.31	-32.25	-38.55	**1350**
1400	292.68	297.99	-5.25	-32.00	-38.30	**1400**
1450	291.20	296.43	-5.19	-31.75	-38.05	**1450**
1500	289.77	294.91	-5.13	-31.50	-37.80	**1500**
1550	288.35	293.41	-5.06	-31.25	-37.55	**1550**
1600	286.97	291.97	-5.00	-31.00	-37.30	**1600**
1650	285.78	290.67	-4.97	-30.88	-37.18	**1650**
1700	284.58	289.41	-4.94	-30.75	-37.05	**1700**
1750	283.41	288.18	-4.91	-30.63	-36.93	**1750**
1800	282.27	286.96	-4.88	-30.50	-36.80	**1800**
1850	281.17	285.81	-4.84	-30.38	-36.68	**1850**
1900	280.08	284.66	-4.81	-30.25	-36.55	**1900**
1950	279.02	283.55	-4.78	-30.13	-36.43	**1950**
2000	278.00	282.47	-4.75	-30.00	-36.30	**2000**
2050	276.92	281.36	-4.59	-29.84	-36.14	**2050**
2100	275.91	280.29	-4.44	-29.69	-35.99	**2100**
2150	274.89	279.22	-4.28	-29.53	-35.83	**2150**
2200	273.91	278.15	-4.13	-29.38	-35.68	**2200**
2250	272.94	277.15	-3.97	-29.22	-35.52	**2250**
2300	271.99	276.15	-3.81	-29.06	-35.36	**2300**
2350	271.03	275.18	-3.66	-28.91	-35.21	**2350**
2400	270.15	274.19	-3.50	-28.75	-35.05	**2400**
2450	269.22	273.27	-3.47	-28.61	-34.91	**2450**
2500	268.34	272.35	-3.44	-28.46	-34.76	**2500**
2550	267.49	271.46	-3.41	-28.32	-34.62	**2550**
2600	266.65	270.58	-3.39	-28.18	-34.48	**2600**
2650	266.03	269.93	-3.36	-28.04	-34.34	**2650**
2700	265.42	269.29	-3.33	-27.89	-34.19	**2700**
2800	264.75	268.59	-3.30	-27.75	-34.05	**2800**
2900	263.66	267.46	-3.15	-27.38	-33.68	**2900**
3000	262.58	266.34	-3.00	-27.00	-33.30	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class BC site-built adjustments, Pages 86-89.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS C

LOG HOMES





GENERAL DESCRIPTION

Class C Log Homes are designed to meet local building code requirements. Overall architectural design is simple. The quality of materials and workmanship is average. The quality and amount of materials used are roughly equivalent to those of the conventional Class C house. Substitute materials of equivalent price and quality may be found in place of some of the materials listed below.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Pine or cedar logs, 6” in diameter, tongue and grooved, precut and numbered, preservative treated; wood double-hung windows.

ROOF STRUCTURE: Pre-assembled truss, plywood sheathing, or open rafters with exposed wood.

INTERIOR PARTITIONS AND FINISH: 2” x 4” Stud framing, 16” o.c.; painted drywall or average-quality plywood paneling; flush hollow-core doors; softwood trim; closet shelving.

INSULATION: Foam strip seal between logs; floor, wall, and ceiling insulation for an extreme climate.

FLOOR FINISH: 5/8” plywood or equivalent, average quality carpet and pad, vinyl tile in kitchen and bathroom.

CEILING: Cathedral ceiling or trusses with drywall; or a combination of the two.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOORS: Concrete slab, floor drain.

FLOOR CONSTRUCTION: 5/8” plywood; wood joists and bridging.

HEATING AND AIR CONDITIONING: Forced-air heating with adequate output and ductwork.

ELECTRICAL: Adequate number of outlets.

PLUMBING: Same as the conventional C house.

BUILT-IN UNITS: Hardwood veneer, vinyl veneer, paint grade wood, or pineboard kitchen cabinets. Counter tops are laminated plastic or plain tile.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOG HOMES

CLASS C
1 STORY

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	182.59	186.80	-8.00	-38.75	-43.16	**400**
450	178.50	182.57	-7.44	-37.31	-41.72	**450**
500	174.71	178.64	-6.88	-35.88	-40.29	**500**
550	171.98	175.80	-6.31	-34.44	-38.85	**550**
600	169.41	173.14	-5.75	-33.00	-37.41	**600**
650	167.79	171.42	-5.75	-32.56	-36.97	**650**
700	166.27	169.80	-5.75	-32.13	-36.54	**700**
750	164.73	168.19	-5.75	-31.69	-36.10	**750**
800	163.26	166.65	-5.75	-31.25	-35.66	**800**
850	161.70	165.02	-5.59	-30.69	-35.10	**850**
900	160.19	163.44	-5.43	-30.13	-34.54	**900**
950	158.71	161.90	-5.26	-29.56	-33.97	**950**
1000	157.26	160.40	-5.10	-29.00	-33.41	**1000**
1050	156.10	159.19	-5.01	-28.69	-33.10	**1050**
1100	154.96	158.01	-4.93	-28.38	-32.79	**1100**
1150	153.86	156.87	-4.84	-28.06	-32.47	**1150**
1200	152.79	155.75	-4.75	-27.75	-32.16	**1200**
1250	151.81	154.74	-4.65	-27.50	-31.91	**1250**
1300	150.86	153.74	-4.55	-27.25	-31.66	**1300**
1350	149.93	152.77	-4.45	-27.00	-31.41	**1350**
1400	149.01	151.80	-4.35	-26.75	-31.16	**1400**
1450	148.12	150.90	-4.25	-26.50	-30.91	**1450**
1500	147.24	149.99	-4.15	-26.25	-30.66	**1500**
1550	146.40	149.12	-4.05	-26.00	-30.41	**1550**
1600	145.56	148.25	-3.95	-25.75	-30.16	**1600**
1650	144.94	147.60	-3.96	-25.69	-30.10	**1650**
1700	144.33	146.96	-3.96	-25.63	-30.04	**1700**
1750	143.74	146.35	-3.97	-25.56	-29.97	**1750**
1800	143.15	145.75	-3.98	-25.50	-29.91	**1800**
1850	142.58	145.16	-3.98	-25.44	-29.85	**1850**
1900	142.03	144.57	-3.99	-25.38	-29.79	**1900**
1950	141.49	144.01	-3.99	-25.31	-29.72	**1950**
2000	140.96	143.45	-4.00	-25.25	-29.66	**2000**
2050	140.40	142.86	-3.92	-25.13	-29.54	**2050**
2100	139.83	142.28	-3.84	-25.01	-29.42	**2100**
2150	139.28	141.71	-3.76	-24.89	-29.30	**2150**
2200	138.73	141.14	-3.68	-24.78	-29.19	**2200**
2250	138.20	140.59	-3.59	-24.66	-29.07	**2250**
2300	137.67	140.05	-3.51	-24.54	-28.95	**2300**
2350	137.16	139.52	-3.43	-24.42	-28.83	**2350**
2400	136.66	139.00	-3.35	-24.30	-28.71	**2400**
2450	136.17	138.50	-3.32	-24.19	-28.60	**2450**
2500	135.68	138.00	-3.29	-24.09	-28.50	**2500**
2550	135.22	137.52	-3.26	-23.98	-28.39	**2550**
2600	134.76	137.04	-3.24	-23.87	-28.28	**2600**
2650	134.31	136.58	-3.21	-23.76	-28.17	**2650**
2700	133.86	136.12	-3.18	-23.66	-28.07	**2700**
2800	133.09	135.31	-3.15	-23.55	-27.96	**2800**
2900	132.18	134.37	-3.08	-23.28	-27.69	**2900**
3000	131.29	133.47	-3.00	-23.00	-27.41	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class C site-built adjustments, Pages 70-73.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS C
1 1/2 STORY

LOG HOMES

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	221.96	226.41	-8.00	-38.75	-43.16	**400**
450	218.42	222.70	-7.44	-37.31	-41.72	**450**
500	215.19	219.30	-6.88	-35.88	-40.29	**500**
550	212.18	216.12	-6.31	-34.44	-38.85	**550**
600	209.34	213.12	-5.75	-33.00	-37.41	**600**
650	207.32	210.99	-5.75	-32.56	-36.97	**650**
700	205.40	208.97	-5.75	-32.13	-36.54	**700**
750	203.56	207.03	-5.75	-31.69	-36.10	**750**
800	201.79	205.16	-5.75	-31.25	-35.66	**800**
850	199.96	203.25	-5.59	-30.69	-35.10	**850**
900	198.18	201.39	-5.43	-30.13	-34.54	**900**
950	196.43	199.56	-5.26	-29.56	-33.97	**950**
1000	194.72	197.77	-5.10	-29.00	-33.41	**1000**
1050	193.36	196.36	-5.01	-28.69	-33.10	**1050**
1100	192.02	194.97	-4.93	-28.38	-32.79	**1100**
1150	190.70	193.60	-4.84	-28.06	-32.47	**1150**
1200	189.41	192.25	-4.75	-27.75	-32.16	**1200**
1250	188.27	191.07	-4.65	-27.50	-31.91	**1250**
1300	187.15	189.90	-4.55	-27.25	-31.66	**1300**
1350	186.05	188.74	-4.45	-27.00	-31.41	**1350**
1400	184.95	187.60	-4.35	-26.75	-31.16	**1400**
1450	183.93	186.53	-4.25	-26.50	-30.91	**1450**
1500	182.91	185.48	-4.15	-26.25	-30.66	**1500**
1550	181.91	184.43	-4.05	-26.00	-30.41	**1550**
1600	180.91	183.39	-3.95	-25.75	-30.16	**1600**
1650	180.17	182.62	-3.96	-25.69	-30.10	**1650**
1700	179.44	181.85	-3.96	-25.63	-30.04	**1700**
1750	178.71	181.09	-3.97	-25.56	-29.97	**1750**
1800	177.99	180.34	-3.98	-25.50	-29.91	**1800**
1850	177.32	179.64	-3.98	-25.44	-29.85	**1850**
1900	176.66	178.95	-3.99	-25.38	-29.79	**1900**
1950	176.00	178.26	-3.99	-25.31	-29.72	**1950**
2000	175.35	177.58	-4.00	-25.25	-29.66	**2000**
2050	174.69	176.89	-3.92	-25.13	-29.54	**2050**
2100	174.03	176.21	-3.84	-25.01	-29.42	**2100**
2150	173.37	175.53	-3.76	-24.89	-29.30	**2150**
2200	172.72	174.86	-3.68	-24.78	-29.19	**2200**
2250	172.10	174.22	-3.59	-24.66	-29.07	**2250**
2300	171.49	173.59	-3.51	-24.54	-28.95	**2300**
2350	170.88	172.96	-3.43	-24.42	-28.83	**2350**
2400	170.27	172.33	-3.35	-24.30	-28.71	**2400**
2450	169.72	171.75	-3.32	-24.19	-28.60	**2450**
2500	169.16	171.17	-3.29	-24.09	-28.50	**2500**
2550	168.61	170.60	-3.26	-23.98	-28.39	**2550**
2600	168.06	170.03	-3.24	-23.87	-28.28	**2600**
2650	167.41	169.36	-3.21	-23.77	-28.18	**2650**
2700	166.77	168.69	-3.18	-23.66	-28.07	**2700**
2800	166.10	167.99	-3.15	-23.55	-27.96	**2800**
2900	165.05	166.91	-3.08	-23.28	-27.69	**2900**
3000	164.00	165.84	-3.00	-23.00	-27.41	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class C site-built adjustments, Pages 70-73.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	295.86	304.53	-8.00	-38.75	-43.16	**400**
450	289.35	297.63	-7.44	-37.31	-41.72	**450**
500	283.32	291.26	-6.88	-35.88	-40.29	**500**
550	277.71	285.37	-6.31	-34.44	-38.85	**550**
600	272.41	279.84	-5.75	-33.00	-37.41	**600**
650	268.49	275.61	-5.75	-32.56	-36.97	**650**
700	264.76	271.71	-5.75	-32.13	-36.54	**700**
750	261.28	268.06	-5.75	-31.69	-36.10	**750**
800	258.03	264.62	-5.75	-31.25	-35.66	**800**
850	254.80	261.24	-5.59	-30.69	-35.10	**850**
900	251.76	258.03	-5.43	-30.13	-34.54	**900**
950	248.84	254.97	-5.26	-29.56	-33.97	**950**
1000	246.09	252.08	-5.10	-29.00	-33.41	**1000**
1050	243.65	249.55	-5.01	-28.69	-33.10	**1050**
1100	241.34	247.14	-4.93	-28.38	-32.79	**1100**
1150	239.14	244.82	-4.84	-28.06	-32.47	**1150**
1200	237.02	242.61	-4.75	-27.75	-32.16	**1200**
1250	235.06	240.54	-4.65	-27.50	-31.91	**1250**
1300	233.14	238.54	-4.55	-27.25	-31.66	**1300**
1350	231.32	236.60	-4.45	-27.00	-31.41	**1350**
1400	229.57	234.77	-4.35	-26.75	-31.16	**1400**
1450	227.85	232.99	-4.25	-26.50	-30.91	**1450**
1500	226.20	231.29	-4.15	-26.25	-30.66	**1500**
1550	224.62	229.59	-4.05	-26.00	-30.41	**1550**
1600	223.07	227.99	-3.95	-25.75	-30.16	**1600**
1650	221.74	226.63	-3.96	-25.69	-30.10	**1650**
1700	220.48	225.28	-3.96	-25.63	-30.04	**1700**
1750	219.25	223.97	-3.97	-25.56	-29.97	**1750**
1800	218.05	222.72	-3.98	-25.50	-29.91	**1800**
1850	216.86	221.53	-3.98	-25.44	-29.85	**1850**
1900	215.76	220.34	-3.99	-25.38	-29.79	**1900**
1950	214.66	219.18	-3.99	-25.31	-29.72	**1950**
2000	213.60	218.06	-4.00	-25.25	-29.66	**2000**
2050	212.51	216.94	-3.92	-25.13	-29.54	**2050**
2100	211.42	215.85	-3.84	-25.01	-29.42	**2100**
2150	210.42	214.74	-3.76	-24.89	-29.30	**2150**
2200	209.39	213.72	-3.68	-24.78	-29.19	**2200**
2250	208.40	212.67	-3.59	-24.66	-29.07	**2250**
2300	207.44	211.65	-3.51	-24.54	-28.95	**2300**
2350	206.50	210.66	-3.43	-24.42	-28.83	**2350**
2400	205.54	209.70	-3.35	-24.30	-28.71	**2400**
2450	204.68	208.75	-3.32	-24.19	-28.60	**2450**
2500	203.80	207.86	-3.29	-24.09	-28.50	**2500**
2550	202.94	206.97	-3.26	-23.98	-28.39	**2550**
2600	202.08	206.07	-3.24	-23.87	-28.28	**2600**
2650	201.49	205.45	-3.21	-23.76	-28.17	**2650**
2700	200.90	204.83	-3.18	-23.66	-28.07	**2700**
2800	200.28	204.18	-3.15	-23.55	-27.96	**2800**
2900	199.30	203.17	-3.08	-23.28	-27.69	**2900**
3000	198.33	202.17	-3.00	-23.00	-27.41	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class C site-built adjustments, Pages 70-73.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD

LOG HOMES





GENERAL DESCRIPTION

Class CD Log Homes are designed to meet minimum standard home code requirements. The overall quality of materials and workmanship is below average. The floor plan is usually simple with little attention given to detail. The quality and amount of materials used are roughly equivalent to the conventional CD house. Substitute materials of equivalent price and quality may be found in place of some of the materials listed below.

COMPONENT DESCRIPTIONS

EXTERIOR WALLS: Pine or cedar logs, 6” in diameter, tongue and grooved, precut and numbered, preservative treated; wood sliding windows.

ROOF STRUCTURE: Pre-assembled truss, plywood sheathing, or open rafters with exposed wood.

INTERIOR PARTITIONS AND FINISH: 2” x 4” stud framing, 16” o.c.; painted drywall or low-quality plywood paneling; flush hollow-core doors; softwood trim; closet shelving.

INSULATION: Foam strip seal between logs; floor, wall, and ceiling insulation for an extreme climate.

FLOOR FINISH: 1/2” plywood or equivalent, inexpensive carpet and pad, vinyl tile in kitchen and bathroom.

CEILING: Cathedral ceiling or trusses with drywall; or a combination of the two.

FOUNDATION: Concrete perimeter foundation with continuous foundation or piers under interior bearing walls.

BASEMENT WALLS: Poured concrete or concrete block walls.

BASEMENT FLOORS: Concrete slab, floor drain.

FLOOR CONSTRUCTION: 1/2” plywood; wood joists and bridging.

HEATING AND AIR CONDITIONING: Forced-air heating with minimum output and ductwork.

ELECTRICAL: Minimum number of outlets and low cost fixtures.

PLUMBING: Same as the conventional CD house.

BUILT-IN UNITS: Inexpensive paint grade or vinyl veneer kitchen cabinets or pineboard cupboards, Counter tops are laminated plastic or plain tile, with a low splash.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	165.23	169.27	-7.25	-35.25	-39.18	**400**
450	162.18	167.06	-6.94	-34.19	-38.12	**450**
500	159.36	165.08	-6.63	-33.13	-37.06	**500**
550	156.62	162.28	-6.31	-32.06	-35.99	**550**
600	154.00	159.61	-6.00	-31.00	-34.93	**600**
650	152.01	157.49	-5.85	-30.44	-34.37	**650**
700	150.10	155.44	-5.70	-29.88	-33.81	**700**
750	148.28	153.49	-5.55	-29.31	-33.24	**750**
800	146.52	151.59	-5.40	-28.75	-32.68	**800**
850	144.91	149.86	-5.24	-28.25	-32.18	**850**
900	143.34	148.15	-5.08	-27.75	-31.68	**900**
950	141.85	146.54	-4.91	-27.25	-31.18	**950**
1000	140.39	144.96	-4.75	-26.75	-30.68	**1000**
1050	139.18	143.65	-4.64	-26.44	-30.37	**1050**
1100	137.99	142.36	-4.53	-26.13	-30.06	**1100**
1150	136.87	141.14	-4.41	-25.81	-29.74	**1150**
1200	135.77	139.94	-4.30	-25.50	-29.43	**1200**
1250	134.81	138.90	-4.23	-25.29	-29.22	**1250**
1300	133.86	137.87	-4.15	-25.08	-29.01	**1300**
1350	132.97	136.90	-4.08	-24.86	-28.79	**1350**
1400	132.08	135.94	-4.00	-24.65	-28.58	**1400**
1450	131.23	135.01	-3.93	-24.44	-28.37	**1450**
1500	130.40	134.10	-3.85	-24.23	-28.16	**1500**
1550	129.59	133.23	-3.78	-24.01	-27.94	**1550**
1600	128.78	132.37	-3.70	-23.80	-27.73	**1600**
1650	128.15	131.69	-3.68	-23.73	-27.66	**1650**
1700	127.53	131.01	-3.66	-23.65	-27.58	**1700**
1750	126.94	130.36	-3.64	-23.58	-27.51	**1750**
1800	126.36	129.72	-3.63	-23.50	-27.43	**1800**
1850	125.80	129.11	-3.61	-23.43	-27.36	**1850**
1900	125.24	128.50	-3.59	-23.35	-27.28	**1900**
1950	124.70	127.93	-3.57	-23.28	-27.21	**1950**
2000	124.17	127.35	-3.55	-23.20	-27.13	**2000**
2050	123.64	126.77	-3.49	-23.09	-27.02	**2050**
2100	123.10	126.19	-3.44	-22.99	-26.92	**2100**
2150	122.58	125.63	-3.38	-22.88	-26.81	**2150**
2200	122.06	125.07	-3.33	-22.78	-26.71	**2200**
2250	121.56	124.54	-3.27	-22.67	-26.60	**2250**
2300	121.06	124.00	-3.21	-22.56	-26.49	**2300**
2350	120.59	123.49	-3.16	-22.46	-26.39	**2350**
2400	120.11	122.98	-3.10	-22.35	-26.28	**2400**
2450	119.65	122.49	-3.06	-22.25	-26.18	**2450**
2500	119.19	122.00	-3.03	-22.15	-26.08	**2500**
2550	118.76	121.54	-2.99	-22.05	-25.98	**2550**
2600	118.32	121.08	-2.96	-21.95	-25.88	**2600**
2650	117.89	120.62	-2.92	-21.85	-25.78	**2650**
2700	117.47	120.17	-2.89	-21.75	-25.68	**2700**
2800	116.73	119.39	-2.85	-21.65	-25.58	**2800**
2900	115.82	118.42	-2.93	-21.33	-25.26	**2900**
3000	114.91	117.47	-3.00	-21.00	-24.93	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class CD site-built adjustments, Pages 54-57.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

CLASS CD
1 1/2 STORY

LOG HOMES

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	201.33	205.78	-7.25	-35.25	-39.18	**400**
450	197.86	202.13	-6.94	-34.19	-38.12	**450**
500	194.63	198.72	-6.63	-33.13	-37.06	**500**
550	191.56	195.47	-6.31	-32.06	-35.99	**550**
600	188.62	192.35	-6.00	-31.00	-34.93	**600**
650	186.39	190.01	-5.85	-30.44	-34.37	**650**
700	184.22	187.74	-5.70	-29.88	-33.81	**700**
750	182.12	185.54	-5.55	-29.31	-33.24	**750**
800	180.07	183.38	-5.40	-28.75	-32.68	**800**
850	178.30	181.52	-5.24	-28.25	-32.18	**850**
900	176.56	179.70	-5.08	-27.75	-31.68	**900**
950	174.84	177.91	-4.91	-27.25	-31.18	**950**
1000	173.16	176.15	-4.75	-26.75	-30.68	**1000**
1050	171.82	174.75	-4.64	-26.44	-30.37	**1050**
1100	170.50	173.36	-4.53	-26.13	-30.06	**1100**
1150	169.20	172.00	-4.41	-25.81	-29.74	**1150**
1200	167.91	170.64	-4.30	-25.50	-29.43	**1200**
1250	166.84	169.52	-4.23	-25.29	-29.22	**1250**
1300	165.79	168.41	-4.15	-25.08	-29.01	**1300**
1350	164.74	167.30	-4.08	-24.86	-28.79	**1350**
1400	163.71	166.21	-4.00	-24.65	-28.58	**1400**
1450	162.76	165.22	-3.93	-24.44	-28.37	**1450**
1500	161.81	164.24	-3.85	-24.23	-28.16	**1500**
1550	160.87	163.26	-3.78	-24.01	-27.94	**1550**
1600	159.94	162.30	-3.70	-23.80	-27.73	**1600**
1650	159.23	161.55	-3.68	-23.73	-27.66	**1650**
1700	158.53	160.82	-3.66	-23.65	-27.58	**1700**
1750	157.83	160.08	-3.64	-23.58	-27.51	**1750**
1800	157.13	159.36	-3.63	-23.50	-27.43	**1800**
1850	156.49	158.68	-3.61	-23.43	-27.36	**1850**
1900	155.85	158.01	-3.59	-23.35	-27.28	**1900**
1950	155.22	157.35	-3.57	-23.28	-27.21	**1950**
2000	154.59	156.68	-3.55	-23.20	-27.13	**2000**
2050	153.98	156.05	-3.49	-23.09	-27.02	**2050**
2100	153.37	155.42	-3.44	-22.99	-26.92	**2100**
2150	152.77	154.79	-3.38	-22.88	-26.81	**2150**
2200	152.17	154.16	-3.33	-22.78	-26.71	**2200**
2250	151.61	153.58	-3.27	-22.67	-26.60	**2250**
2300	151.05	152.99	-3.21	-22.56	-26.49	**2300**
2350	150.49	152.41	-3.16	-22.46	-26.39	**2350**
2400	149.94	151.82	-3.10	-22.35	-26.28	**2400**
2450	149.43	151.29	-3.06	-22.25	-26.18	**2450**
2500	148.92	150.76	-3.03	-22.15	-26.08	**2500**
2550	148.41	150.23	-2.99	-22.05	-25.98	**2550**
2600	147.90	149.70	-2.96	-21.95	-25.88	**2600**
2650	147.30	149.08	-2.92	-21.85	-25.78	**2650**
2700	146.71	148.45	-2.89	-21.75	-25.68	**2700**
2800	146.09	147.80	-2.85	-21.65	-25.58	**2800**
2900	144.93	146.61	-2.80	-21.20	-25.13	**2900**
3000	143.77	145.43	-2.75	-20.75	-24.68	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class CD site-built adjustments, Pages 54-57.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

SQUARE FOOT COSTS

Ground Area	LOG EXTERIOR WALLS 6" DIAMETER		BASEMENT ADJUSTMENTS			Ground Area
	Pine	Cedar	Wood Basement	Crawl Space Only	Slab on Grade Only	
400	269.08	277.84	-7.25	-35.25	-39.18	**400**
450	263.25	271.59	-6.94	-34.19	-38.12	**450**
500	257.90	265.90	-6.63	-33.13	-37.06	**500**
550	252.98	260.67	-6.31	-32.06	-35.99	**550**
600	248.46	255.84	-6.00	-31.00	-34.93	**600**
650	244.69	251.83	-5.85	-30.44	-34.37	**650**
700	241.18	248.10	-5.70	-29.88	-33.81	**700**
750	237.91	244.60	-5.55	-29.31	-33.24	**750**
800	234.82	241.35	-5.40	-28.75	-32.68	**800**
850	231.96	238.34	-5.24	-28.25	-32.18	**850**
900	229.24	235.45	-5.08	-27.75	-31.68	**900**
950	226.66	232.70	-4.91	-27.25	-31.18	**950**
1000	224.21	230.12	-4.75	-26.75	-30.68	**1000**
1050	222.04	227.83	-4.64	-26.44	-30.37	**1050**
1100	219.99	225.67	-4.53	-26.13	-30.06	**1100**
1150	217.99	223.58	-4.41	-25.81	-29.74	**1150**
1200	216.11	221.57	-4.30	-25.50	-29.43	**1200**
1250	214.38	219.75	-4.23	-25.29	-29.22	**1250**
1300	212.71	217.99	-4.15	-25.08	-29.01	**1300**
1350	211.14	216.31	-4.08	-24.86	-28.79	**1350**
1400	209.57	214.69	-4.00	-24.65	-28.58	**1400**
1450	208.10	213.13	-3.93	-24.44	-28.37	**1450**
1500	206.69	211.61	-3.85	-24.23	-28.16	**1500**
1550	205.28	210.15	-3.78	-24.01	-27.94	**1550**
1600	203.94	208.75	-3.70	-23.80	-27.73	**1600**
1650	202.77	207.49	-3.68	-23.73	-27.66	**1650**
1700	201.63	206.30	-3.66	-23.65	-27.58	**1700**
1750	200.56	205.13	-3.64	-23.58	-27.51	**1750**
1800	199.51	204.01	-3.63	-23.50	-27.43	**1800**
1850	198.47	202.94	-3.61	-23.43	-27.36	**1850**
1900	197.46	201.87	-3.59	-23.35	-27.28	**1900**
1950	196.51	200.86	-3.57	-23.28	-27.21	**1950**
2000	195.56	199.86	-3.55	-23.20	-27.13	**2000**
2050	194.61	198.85	-3.49	-23.09	-27.02	**2050**
2100	193.70	197.88	-3.44	-22.99	-26.92	**2100**
2150	192.75	196.94	-3.38	-22.88	-26.81	**2150**
2200	191.87	195.99	-3.33	-22.78	-26.71	**2200**
2250	191.01	195.08	-3.27	-22.67	-26.60	**2250**
2300	190.19	194.20	-3.21	-22.56	-26.49	**2300**
2350	189.37	193.35	-3.16	-22.46	-26.39	**2350**
2400	188.55	192.47	-3.10	-22.35	-26.28	**2400**
2450	187.76	191.66	-3.06	-22.25	-26.18	**2450**
2500	187.01	190.85	-3.03	-22.15	-26.08	**2500**
2550	186.26	190.07	-2.99	-22.05	-25.98	**2550**
2600	185.53	189.28	-2.96	-21.95	-25.88	**2600**
2650	185.00	188.75	-2.92	-21.85	-25.78	**2650**
2700	184.48	188.22	-2.89	-21.75	-25.68	**2700**
2800	183.93	187.66	-2.85	-21.65	-25.58	**2800**
2900	182.98	186.67	-2.93	-21.33	-25.26	**2900**
3000	182.05	185.69	-2.80	-21.00	-24.93	**3000**

ADJUSTMENTS AND ADDITIONS

For diameters greater than 6", see page 141 for the percentage adjustments. For all other adjustments or additions, refer to Class CD site-built adjustments, Pages 54-57.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

DEPRECIATION TABLE FOR LOG HOMES
(All Classes)

Age	Remaining Condition	Age	Remaining Condition
1	99%	31	69%
2	98%	32	68%
3	97%	33	67%
4	96%	34	66%
5	95%	35	65%
6	94%	36	64%
7	93%	37	63%
8	92%	38	62%
9	91%	39	61%
10	90%	40	60%
11	89%	41	59%
12	88%	42	58%
13	87%	43	57%
14	86%	44	56%
15	85%	45	55%
16	84%	46	54%
17	83%	47	53%
18	82%	48	52%
19	81%	49	51%
20	80%	50	50%
21	79%	51	49%
22	78%	52	48%
23	77%	53	47%
24	76%	54	46%
25	75%	55	45%
26	74%	Older	45%
27	73%		
28	72%		
29	71%		
30	70%		

The depreciated condition will be held at 45% if the residence is habitable.

Age = Tax Year - date of construction


Example: A 2024 assessment for a building constructed in 2004, the age is 20 years.

The assessor should recognize exceptional maintenance, remodeling, replacements, and additions in adjusting the % condition from that listed in this table to the actual observed condition. Exceptionally poor maintenance is also to be recognized.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOCATED IN MARQUETTE COUNTY 2014 ASSESSMENT YEAR SPACE = 4' PRICING EXAMPLE

TYPE			Trim & Decoration							12. ELECTRIC	
✓	Single Family			Exc.	✓ Ord.		Min		Wall Fur.	Flr. Fur.	150 Amps Service
✓	CEDAR LOG HOME		Size and No. of Closets						No Heat	1st Fl.	2nd Fl.	No. & Qual. Elec. Fixtures
Year Built		Year Remod.		Lg.	✓ Ord.		Small					Exc. ✓ Ord Min
2000				Many	✓ Ord.		Few		Central Air Cond.	Tons		No. Electric Outlets
	Number of Rooms		Doors		Solid	✓	H.C.					Many ✓ Ord Few
1	Basement		6. FLOORS						13. PLUMBING			$3960
4	1st floor		Kitchen Fl. VINYL					2	No. of Baths 3,400			
2	2nd floor		Other CARPET						Extra Stool		Extra Lav.	
2	Baths								Ceramic Floor			
3	Total Bedrooms		6. CEILINGS						Ceramic Wainscot			
1. EXTERIOR		$	✓ Drywall		Plaster			1	Tub Alcove 560		Fan	
	Wood, Shingle		Tile		Suspended				Separate Shower			
	Aluminum, Vinyl											
	Brick		7. EXCAVATION						Water Softener	Owned	Leased	
✓	6" MACHINED LOGS		Basement 960 S.F.						Water Heater Gallons: 30	✓ Gas	Elec.	
	Insulation		Crawl S.F.						14. 8000+3560 = $11,560			
			Slab S.F.						WATER	Public	✓ Well	
2. WINDOWS			Height to Joists 7 FT.						SEWER	Public	✓ Septic 1000 gal	
	Many	Large	8. BSMT. WALLS & FLOORS						16. BUILT-IN ITEMS			$6,400
✓	Avg.	✓ Avg	10" Conc. Blk		Poured				Oven		Cooktop	
	Few	Small	Treated Wood						Drop-in Range		Disposal	
✓	Wood Sash		✓ Concrete Floor					✓	Hood VENTED 425		Microwave	
	Metal Sash		9. BASEMENT FIN. $						Dishwasher		Compactor	
	Vinyl Sash		Wall Finish									
✓	Double Hung		Floor Finish					✓	Fireplace	✓ Fdn 5775	Pre-Fab	
	Horiz. Sliding		Ceiling Finish						Free-standing			
	Casement								Chimney	1 Sty	✓ 2 Sty	Inside ✓ Outside
✓	Double Glass		Walkout									
✓	Storms & Screens		Insulation						Cupboard Length AVG		Quality AVG	
			10. FLOOR SUPPORT						16. PORCHES			
3. ROOF			Joists 2" x 10" - 16" o.c.						Type	WCP	CPP	
✓	Gable	Gambrel	Unsupported Length 11½'						Wide	40	5	
	Hip	Mansard	Sill Plate ✓ Yes No						Deep	8	4	
	Flat	Eavetrgh	Diag. Sub Floor						17. GARAGE/CARPORT		Year Built	
✓	Asphalt Shingles		Ply. Sub Floor 5/8"						Attached		Cars	Separate
			Center Support WOOD						Wide		Deep	Condition:
✓	Insulation								Exterior		Floors	
Chimney Type BRICK			11. HEATING & AIR COND.						Doors		Finish	
Front overhang			✓ Gas		Oil		Elc.					
Other overhang 12"			Wood		Coal		Steam		SIZE FOR RATES 950 S.F. CLASS C			
4. INTERIOR			✓ Forced Warm Air						Typical class of neighboring houses			
	Drywall	Plaster	Forced Warm Water						Neighborhood is: Improving ✓ Stable Declining			
✓	Paneled WOOD		Stove or Space Heat						Condition for age AVG		Effective Age 2000	

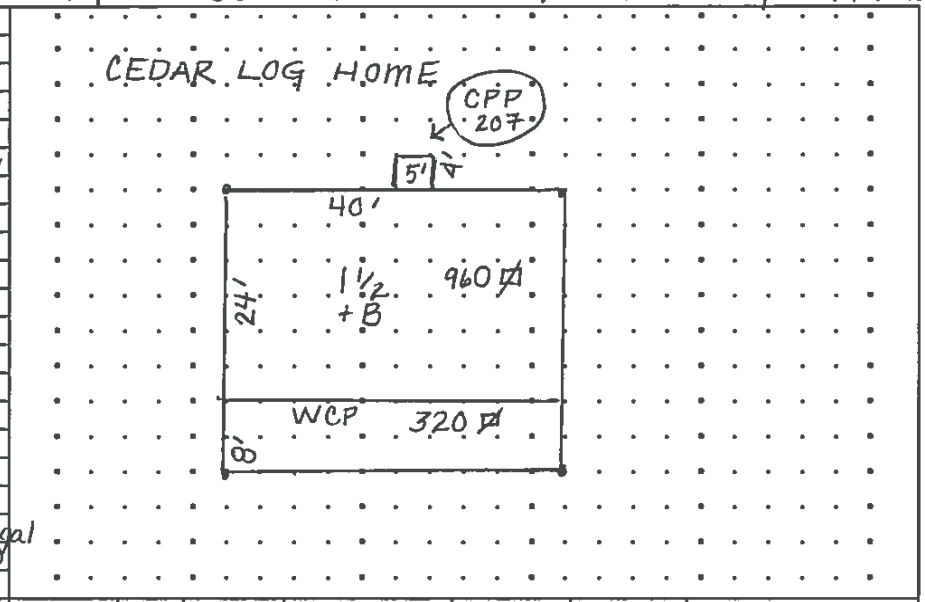

ITEM	SQ. FT./ LIN. FT.	UNIT COSTS	BASE COST	COUNTY MULT.	DEPR. % GOOD	DEPRECIATED COST
1½ +B	960	146.42	140,563			
#13,14,15			21,920			
#16 WCP	320	23.70	7,584			
#16 CPP	20	20.80	416			
		TOTAL BASE	170,483	.96	.86	140,751
		COUNTY MULTIPLIER	.96			
		COST NEW	163,664	Total Depr. Cost:	$	140,751
		Priced	Date	E.C.F.	X	
				True Cash Value	$	

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

A-FRAME CABINS

DESCRIPTIONS

A-Frames are buildings with steep gable roofs that extend to the ground. Costs are packaged cabins at resort sites.

The following components are included in the square foot costs for average A-frame packaged cabins at resort sites:

ROOF FRAMING: 4” x 8” @ 48” o.c. with 2” T&G sheathing.

INTERIOR PARTITIONS AND FINISH: Painted drywall or plywood paneling.

FLOOR FINISH: Average-quality carpet and pad; tile in kitchen and bathroom.

BASEMENT: Poured concrete or concrete block walls.

ROOFING: Wood or composition shingles.

FLOOR CONSTRUCTION: 4” x 6” girders, 48” o.c. with 1” plywood or 2” T&G subfloor, or 2” x 6” joists, 16” o.c. with 1” subfloor.

HEATING AND AIR CONDITIONING: Forced-air heating system.

PLUMBING: One full bath.

BUILT-IN UNITS: Average-quality veneer or paint-grade cabinets.

SQUARE FOOT COSTS

Per square foot of ground area as follows:

Area	Average Quality	Good Quality
300	$101.04	$133.56
400	91.31	122.58
500	88.68	118.82
600	86.93	116.30
700	84.86	113.69
800	84.03	111.92
1000	81.37	108.73
1200	79.35	106.30
1400	77.66	104.56
1600	76.61	102.15
1800	75.61	101.06
2000	73.90	99.49

ADDITIONS

Lofts, add per square foot of loft area, with average cost floor cover, minimum partition, some electrical fixtures, $29.45 – $37.87.

Stairs $960.30 – $1267.20

Sewage Disposal $3,292.70 – $7,870.50

Electrical $78.24 per outlet

Plumbing $1,069.32 per fixture

Wood decks, add per square foot of deck, $26.04 – $51.01

For other adjustments, such as built-ins, see Adjustment Section, Class C. Site-built residences.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

LOW-COST RECREATION CABINS

DESCRIPTION

Low-cost recreation cabins are usually seasonally used structures which are frequently constructed with less than average workmanship. Included in the cabins are just enough extras to yield marginally habitable buildings.

The following costs are averages of cottages or cabins usually erected with local part-time labor to minimum specifications, in resort areas. They are designed primarily for summer use.

Typically, the cabins are of light wood stud or single-wall, box frame construction with exterior walls of board and batten or cheap siding. Floors are light T&G on wood joists and roofs are solid one inch sheathing with composition roll roofing. Low cost cabinets commensurate with the size of the cabin are included.

Plumbing and electrical items and any trim or additional finish such as brick or stone, insulation, ceilings, etc., are extras. Fireplaces and heating units are not included. Winterizing, including floor sheathing, wall sheathing, or composition siding, drywall or plywood ceiling, and ceiling insulation, will need to be added to the square foot cost.

Finished cabins will have interior drywall or plywood finish, and drywall or plywood partitions. Unfinished cabins will have exterior walls exposed on the interior but do include minimum partitioning. Electrical costs, which should be added, include a single 110-volt service with 15 ampere circuits to approximately one outlet, switch, or fixture for each 75 square feet. Plumbing is not included.

Electrical under “Additions” is the amount to be added per additional electrical fixture above the minimum stated above.

Sq. Ft. Space Area	Unfinished Cost	Finished Cost	Electrical Cost
100	$83.14	$104.46	$12.36
200	75.33	88.82	7.18
300	71.06	81.49	5.21
400	67.87	78.17	4.15
500	65.66	75.04	3.52
600	62.54	71.30	3.08
700	61.11	70.04	2.78
800	59.87	67.68	2.56
900	59.06	66.64	2.39
1000	57.27	65.66	2.25
1200	56.03	63.06	1.95
1400	54.32	61.42	1.77

ADDITIONS

Plumbing costs include bathroom partition, door, and miscellaneous small items in the base plumbing service, plus a cost per fixture, generally low quality, all connected to sewer line. For other plumbing fixtures, or other qualities, see UIP.

Base plumbing cost	$1,232.32
Water closet	$925.87
Lavatory	$619.42
Water heater	$925.87
Plumbing fixture	$1,069.32

Heating may be taken from UIP.

Fireplaces may be taken from UIP.

Cabinet shower	$958.47
Tub	$1,199.72
Tub/Shower	$1,760.46
Kitchen sink	$730.27
Sewage disposal system	$3,292.70
Electrical (per outlet)	$78.24
Winterizing	$8.41 – $13.04
Unfinished attic with flooring	$7.83

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.

This page is intentionally left blank.

© 2025 Marshall & Swift/Boeckh, LLC, all rights reserved.
Any reprinting, distribution, modification, reverse engineering, or creation of derivative works, is strictly prohibited.